

**MELSEC**  
**FX1S**  
**FX1N**  
**FX2N**  
**FX2NC**

## Technical Catalogue

**2004**

## New Items in this Catalogue

### New Products 2004



#### **MELSEC FX2NC**

The line of FX2NC is extended by 2 analog modules for analog-to-digital conversion and digital-to-analog conversion with 4 channels each.



#### **Special function modules**

The new analog module FX2N-5A is a combination converter module and features 4 analog inputs and 1 analog output.



#### **Software**

The proven programming systems GX Developer and GX IEC Developer are available in a new program version with extended function range.

## Further Publications within the PLC Range

### Technical Catalogues

#### ***Q, AnU, QnA, AnS, QnAS Series Technical Catalogues***

Product catalogues for programmable logic controllers and accessories for the further MELSEC PLC series

#### ***Networks Technical Catalogue***

Product catalogue for Master and Slave modules as well as accessories for the use of programmable logic controllers in open and MELSEC networks (art. no. 136730)

#### ***HMI Technical Catalogue***

Product catalogue for operator terminals, supervision software and accessories (art. no. 68542)

## Additional Services

You will find current information on updates, alterations, new items, and technical support on the MITSUBISHI ELECTRIC's web pages ([www.mitsubishi-automation.com](http://www.mitsubishi-automation.com)). The products section of the MITSUBISHI home site includes various documentations of the whole product range by MITSUBISHI ELECTRIC as well as the current version of this catalogue on hand. All manuals and catalogues can be downloaded. The content is updated daily and to date is provided in German and English.

## About this product catalogue

Due to the constantly growing product range, technical alteration, and new or changed characteristical features, this catalogue is updated frequently.

Texts, figures and diagrams shown in this product catalogue are intended exclusively for explanation and assistance in planning and ordering the programmable logic controllers of the MELSEC FX1S, FX1N, FX2N, FX2NC series and the associated accessories. Only the manuals supplied with the units are relevant for installation, commissioning and handling of the units and the accessories. The information given in these documentations must be read before installation and commissioning of the units or software.

Should questions arise with regard to the planning of modules described in this product catalogue, do not hesitate to contact the german branch of the MITSUBISHI ELECTRIC EUROPE B.V. in Ratingen or one of its distributors (see cover page).

© MITSUBISHI ELECTRIC EUROPE B.V. 04/2004 (6th edition - version F)

## FX FAMILY

### SYSTEM DESCRIPTION

◆ Introduction of the FX family .....	4
◆ Networks .....	8



## MELSEC FX1S

### BASE UNITS

◆ Description of system and unit .....	10
◆ Specifications .....	12



### ACCESSORIES

◆ Adapter, display module, control panels .....	14
◆ Memory cassette, simulation strip, simulation box, FX-MESSENGER-SET .....	15



### TERMINALS AND DIMENSIONS

◆ Terminal assignments .....	16
◆ Dimensions .....	17



## MELSEC FX1N/FX2N/FX2NC

### SYSTEM DESCRIPTION

◆ Base units, possible configurations .....	18
◆ Extension and special function modules .....	24
◆ System specifications .....	27



### BASE UNITS

◆ Specifications FX1N .....	28
◆ Specifications FX2N/FX2NC .....	30



### EXTENSION UNITS

◆ Compact extension units .....	35
◆ Modular extension units .....	37
◆ Extension adapter boards .....	40



### SPECIAL FUNCTION UNITS

◆ Analog modules and adapters, temperature control module .....	41
◆ Counter module, positioning modules .....	47
◆ Interface modules and adapters .....	49
◆ Communications modules and adapters, network modules .....	51



### ACCESSORIES

◆ Interface converter, communications modules and adapters, PROM adapter .....	70
◆ Memory cassettes, batteries .....	72
◆ Display module, control panels .....	73
◆ Simulation devices, cables .....	74
◆ Terminal blocks .....	75
◆ Connection cables for terminal blocks, replacement terminals, power supply .....	76



### TERMINALS AND DIMENSIONS

◆ Terminal assignments of the base units .....	77
◆ Terminal assignments of the extension units .....	84
◆ Terminal assignments of the special function units .....	88
◆ Dimensions .....	93



## PROGRAMMING

### SOFTWARE AND PROGRAMMING UNITS

◆ Software .....	99
◆ Hand-held programming units, cables and EPROM writer .....	104



## APPENDIX

◆ Order form .....	106
◆ Index .....	107

## The MELSEC PLC Systems

### The MELSEC FX Family

The MELSEC FX family includes a very comprehensive range of base and expansion modules, enabling you to configure a customised system tailored to your precise requirements.

Depending on your application and control needs you can choose from the small, attractively-priced, "stand-alone" MELSEC FX1s series, the expandable FX1N series or the more powerful FX2N /FX2NC series.

With the exception of the FX1s all FX series can be expanded to adapt them to the changing needs of your installations and applications.

Network integration is also supported, making it possible for your FX controllers to communicate with other PLCs, controllers and HMs. The PLC systems can be configured as local stations in MITSUBISHI networks, and as slave stations in open networks (PROFIBUS/DP).


In addition to this, the controllers of the MELSEC FX1s/FX1N/FX2N series also support integration in multidrop and peer-to-peer network configurations.

All FX systems are members of the great MELSEC family of PLCs, in which all systems are compatible with one another.

### Special features:

- Expandable from 10 – 256 I/Os
- Compact, robust design
- Extensive communications support
- Simple installation
- Custom configuration for the needs of existing systems
- Innovative, "future-proof" technology protects your investment

- Worldwide standards
- Quality products manufactured in facilities with ISO 9001 certified quality management systems and subject to special manufacturers' standards

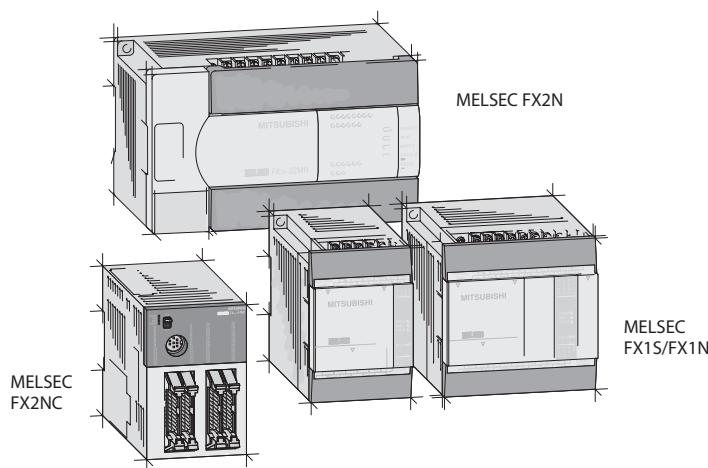

### Expandability and Power

The MELSEC FX family is highly flexible, enabling fast and efficient configuration and programming for the application at hand.

It is the ideal choice, no matter whether you need to install a simple control application requiring up to 34 I/Os (FX1s) or a demanding, complex system with up to 256 I/O points (FX2N/FX2NC).

The capacity of the CPUs of the FX family can be expanded with memory cassettes. Non-volatile memory cassettes with a capacity of up to 16 K program steps are available for reliable, long-term storage of your PLC projects. In addition to the other advantages this enables you to switch programs at very short notice, simply by replacing a cassette.

There are three series in the MELSEC FX family, each of which is designed for a different application profile:

### ● The FX1s series

The MELSEC FX1s series is the inexpensive entry to the MELSEC FX family. With its small dimensions it is also an excellent alternative to relay/contactor control configurations.

### ● The FX1N series

The CPUs of the FX1N series offer more power than the FX1s series, plus modular expansion capabilities. You can choose from I/O expansion modules and special function modules for a wide variety of applications.

### ● The FX2N series


The FX2N series complements the existing FX family. It gives you the freedom of modular expandability, with a wide selection of expansion modules and special function modules.

The FX2N is also one of the fastest PLC systems available, with a cycle time of just 0.08 µs per logical instruction.

### ● The FX2NC series

The performance of the FX2NC is the same as that of the FX2N series, but it has more compact dimensions. It is the ideal choice for applications where little space is available for the controller.

Thus the FX2N and FX2NC series give you the most powerful CPU for your application and combines all benefits of a compact PLC system with the performance of a modular PLC system.

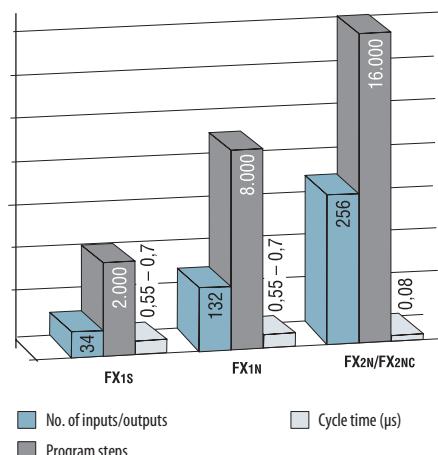

## Features


The modular design of the FX1N/FX2N/FX2NC series makes it extremely flexible, enabling it to be used for a very broad range of applications.

You can configure tailor-made systems by combining modules from a variety of different categories (see figure).

All modules are electrically isolated from their environment with optocouplers for maximum reliability.

### Communications modules

Interface modules with RS232/RS422/RS485 interfaces for the connection of peripherals and PLC-PLC links. Network modules for Profibus/DP, AS-I, DeviceNet, CANopen and for the configuration of proprietary Mitsubishi networks

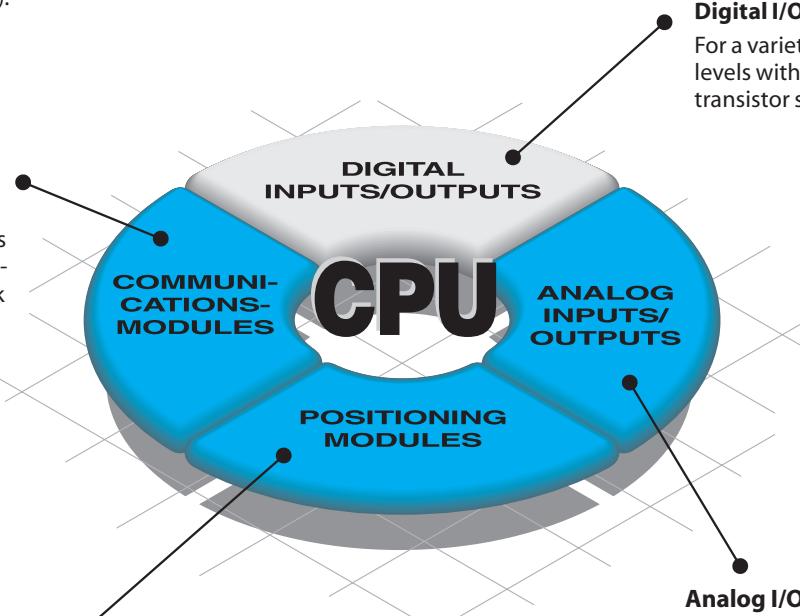

### Digital I/O modules

For a variety of signal levels with relay or transistor switches

### Positioning modules

High-speed counter modules with support for the connection of incremental rotary transducers and positioning modules for servo and stepping motor drives

### Analog I/O modules

For processing current/voltage signals and temperature registration with a direct connection option for PT100 resistance thermometers and thermocouples

### Digital and special function modules – configuration

The options for using digital and special function modules are dictated by the CPU used in the system.

When calculating the number of special function modules you can use in a system you must take both the number of digital modules and the maximum number of special function modules that can be used into account.

The table on the right provides a simplified guide to the number of modules you can use in each system type. More detailed information and the basic principles of system configuration can be found on page 23 ff.

CPU type	System restrictions
FX1S	Stand-alone PLC with 10 / 14 / 20 or 30 I/Os; no special function modules but 1 I/O adapter board can be installed
FX1N	PLC with max. 132 I/Os; max. 2 special function modules supported <sup>①</sup>
FX2N	PLC with max. 256 I/Os; max. 8 special function modules can be connected
FX2NC	PLC with max. 256 I/Os; max. 4 special function modules can be connected

<sup>①</sup> When using a compact extension unit a maximum of 8 special function modules can be connected.

## Handling



### Installation

Handling and installation of the modules are very simple.

All modules are fitted with an integrated DIN adapter for snap-on installation on DIN rail systems.


If you wish, the modules can also be installed normally on flat surfaces with screw fastenings.

In the FX1N and FX2N/FX2NC series all connections between the CPU's system bus and the expansion and special function modules are made with the standard flat ribbon cable. No other internal system wiring is required for connecting the CPU and modules.

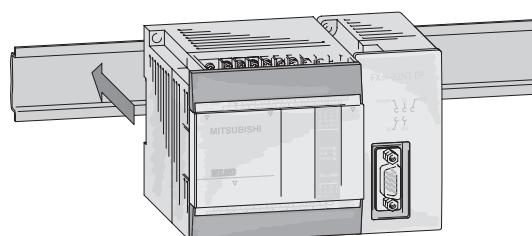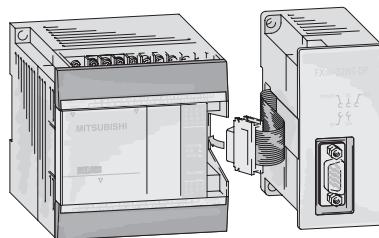

### Wiring


All external wiring is connected to the standard cable terminals to the screw terminals on the modules. The entire terminal block has a cover which provides protection against short circuits and inadvertent contact.

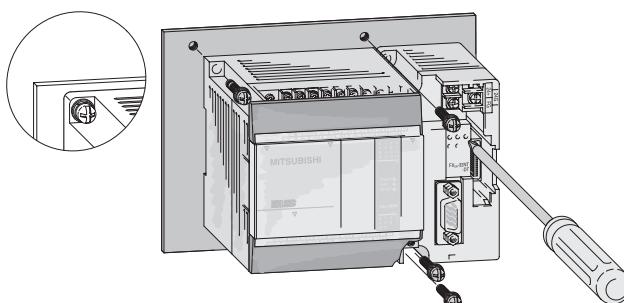

### Programming

All CPUs have a standardised programming interface for the connection of a programming unit or a personal computer.

Simple control tasks can be programmed directly in ladder or instruction list using hand-held programming units, the control units of the MAC E series and GOT series or the programming tool GX Developer (FX). In addition to this the CPUs can also be programmed with the GX IEC Developer (FX) software package, which runs on a normal PC. This powerful programming environment can be used to create large application programs conforming to the IEC 1131.3 (EN 61131) standard.

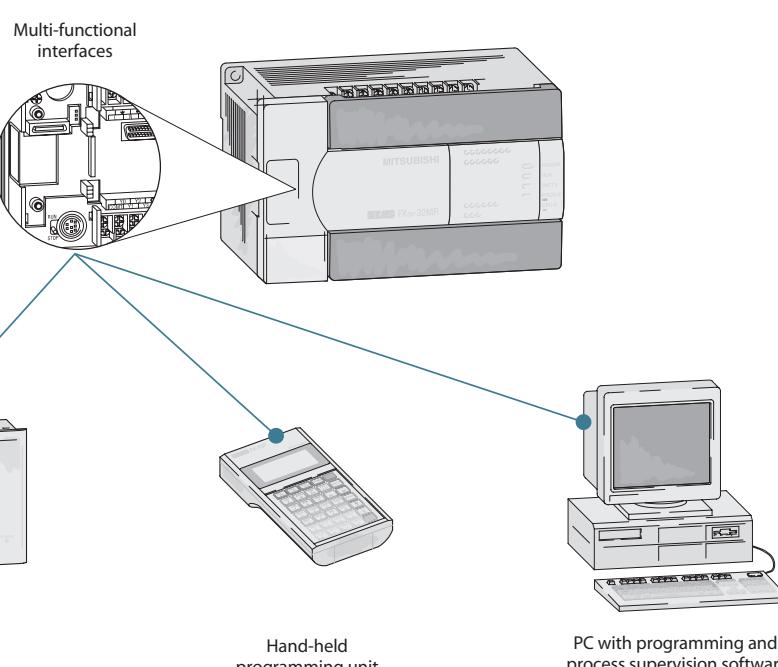


Text or graphic operator terminal

Hand-held programming unit

PC with programming and process supervision software

## Process visualisation


For more effective supervision of machines and processes you can configure a process visualisation system as a hardware or software solution with partial or full graphical support. Process visualisation products available from Mitsubishi include a variety of different operator terminals and the powerful MX4 SCADA/MX4 HMI process visualisation software package.

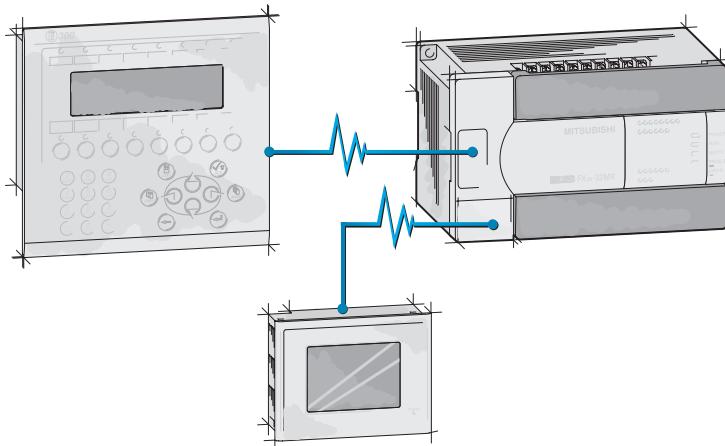

## Peripherals

Separate interface modules enable the connection of output devices such as printers and also a variety of input devices such as barcode readers. Optional plug-in interfaces support the connection of additional programming or operator terminals, as well as the realization of various serial links.

A range of special communications modules is also available for the integration of your PLC systems in a variety of networks.

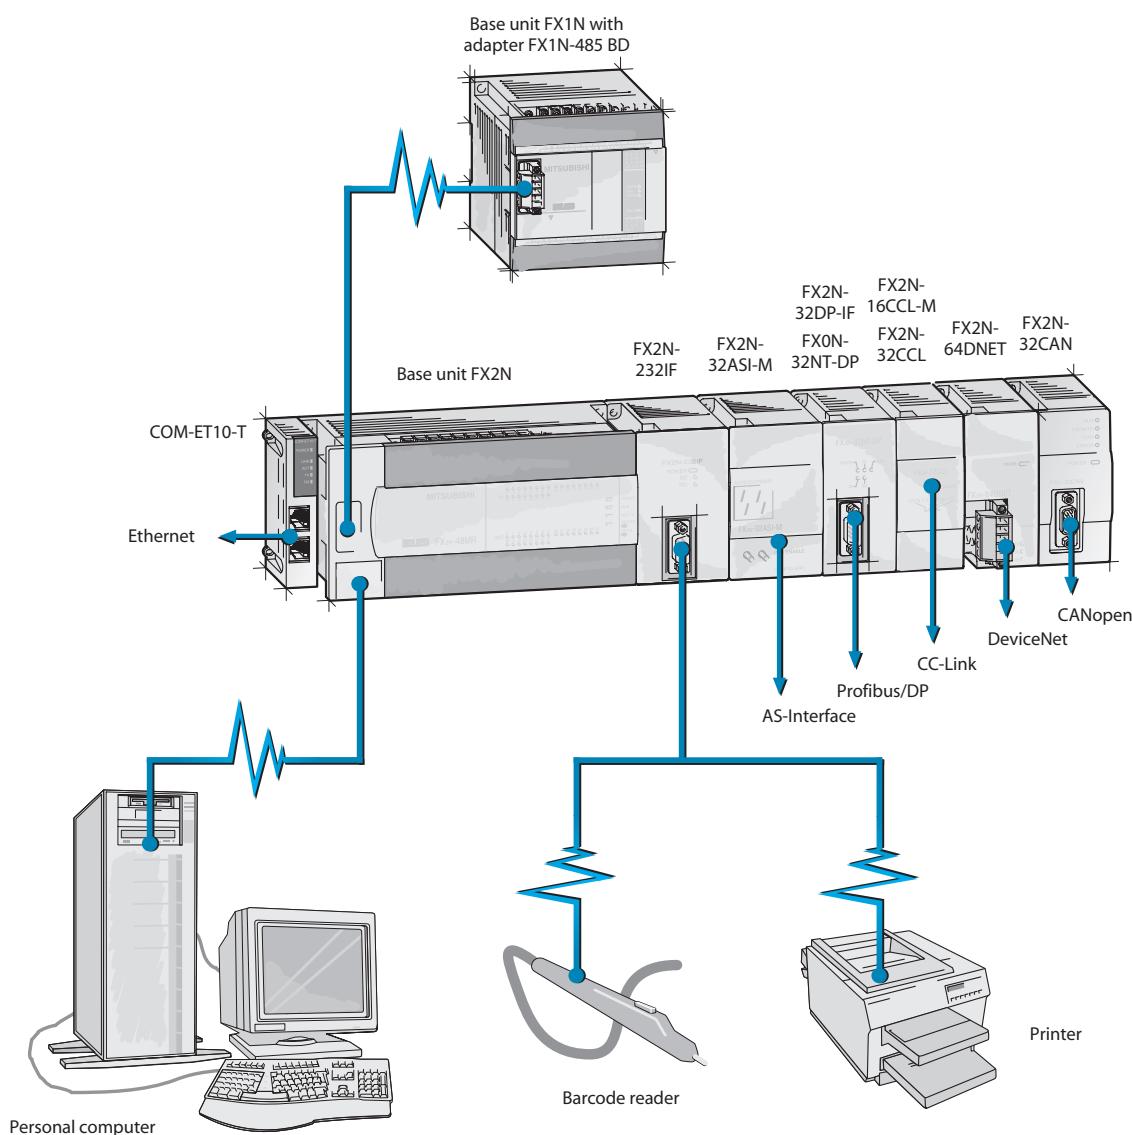

## MELSEC Networks

### TCP/IP ETHERNET

Ready for immediate operation with the worldwide standard TCP/IP protocol. A PC connected to the Ethernet has full access to all PLCs in the MELSECNET, all the way down to the I/Os on the production level.

### MELSECNET/10 and -NET(II)

Low-cost cabling, brilliantly simple set-up and maximum availability thanks to redundancy and Floating Master. The max. coverage is up to 30 km.

### MELSECNET/B

A cost-effective alternative within the production level. Enables implementation of easily-manageable configurations for complex applications by means of distributed intelligence.

### CC-Link

The network for the control and I/O level comprises capabilities like real-time processing and distributed intelligence. Modules of third-party manufacturers can be integrated in this open network.

### MELSEC I/O-LINK


Remote module distribution to the machine. Devices of third-party manufacturers can be integrated. Cabling with twisted pair cable in a tree structure.

### MELSEC FX-PPN

The FX-PPN construction enables a network for up to 8 FX controllers as clients. The maximum coverage is up to 500 m. A standard twisted-pair cable can be used as the communications media.


### COMMAND LEVEL

TCP/IP ETHERNET

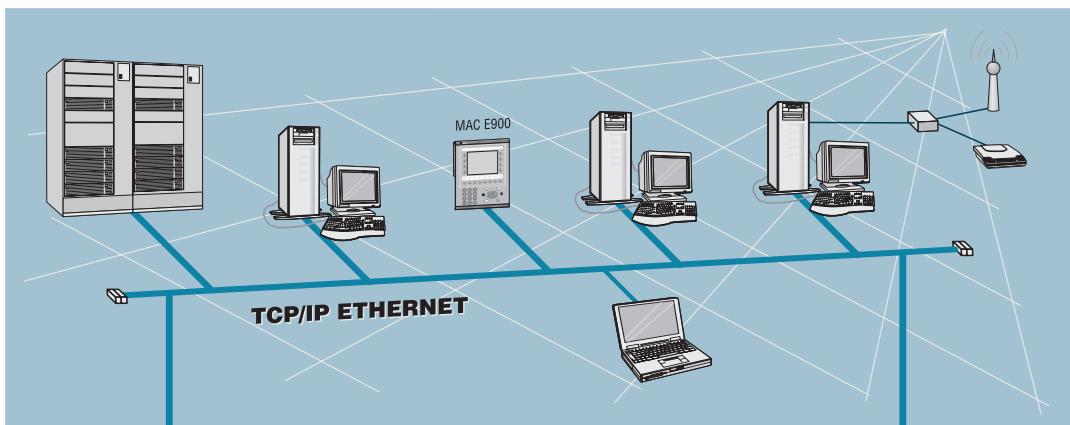


### CONTROL LEVEL

MELSECNET/10  
MELSECNET(II)  
MELSECNET/B  
CC-Link

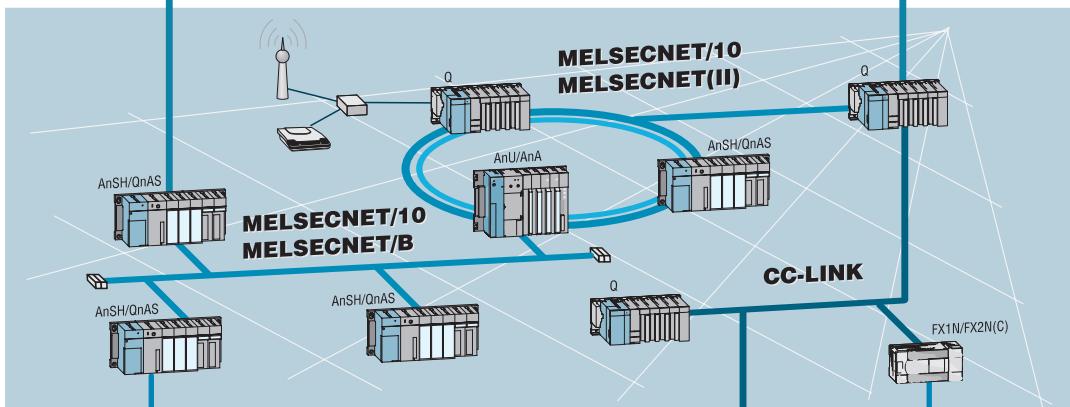

### PRODUCTION LEVEL

CC-Link  
MELSEC I/O LINK  
MELSEC FX-PPN

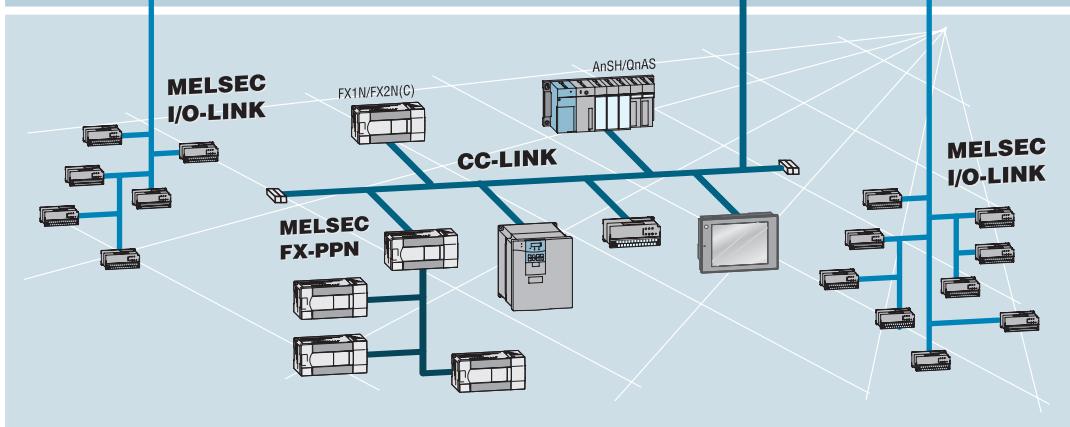

## Open Networks

### MAP 3.0 ETHERNET

Interdepartmental data exchange between the command and production levels using a non-proprietary protocol with short throughput times.

### CC-Link

The new open network for the control and I/O level. Different sensors and actuators can be connected independently from the manufacturer. Up to 64 participants can be linked up to a network.

### PROFIBUS/DP

Enables quick and simple connection of sensors and actuators from different manufacturers to MELSEC PLCs, with data transfer rates of up to 12 Mbaud.

### DeviceNet

Cost-effective CAN-based network communications. Fault-resistant network structure where components of different manufacturers can be integrated quickly and easily.


### AS-Interface

International standard for the lowest field bus level. Connection of conventional sensors and actuators with twisted pair cable.


### CANopen

Cost-effective communications network in interference tolerant network structure. Components of different manufacturers can be integrated easily and quickly.


**COMMAND LEVEL**  
MAP 3.0 ETHERNET

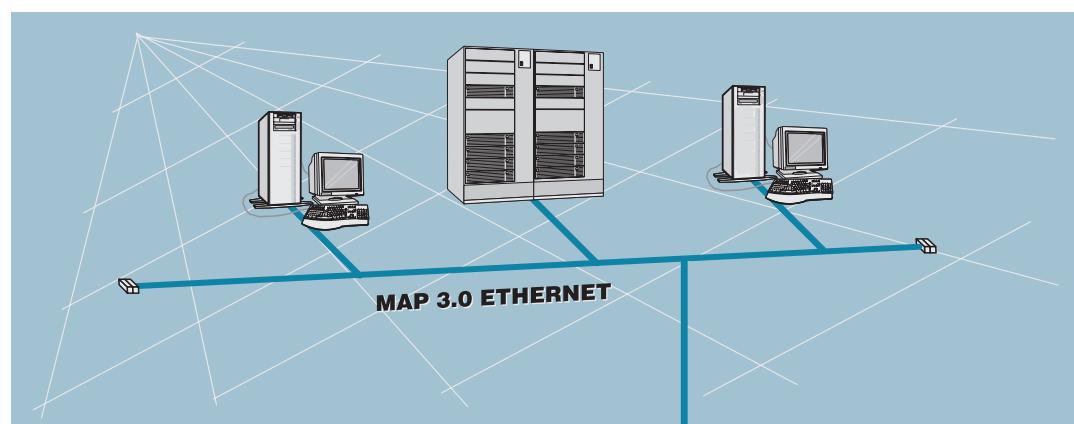

**CONTROL LEVEL**  
PROFIBUS/FMS  
CC-Link

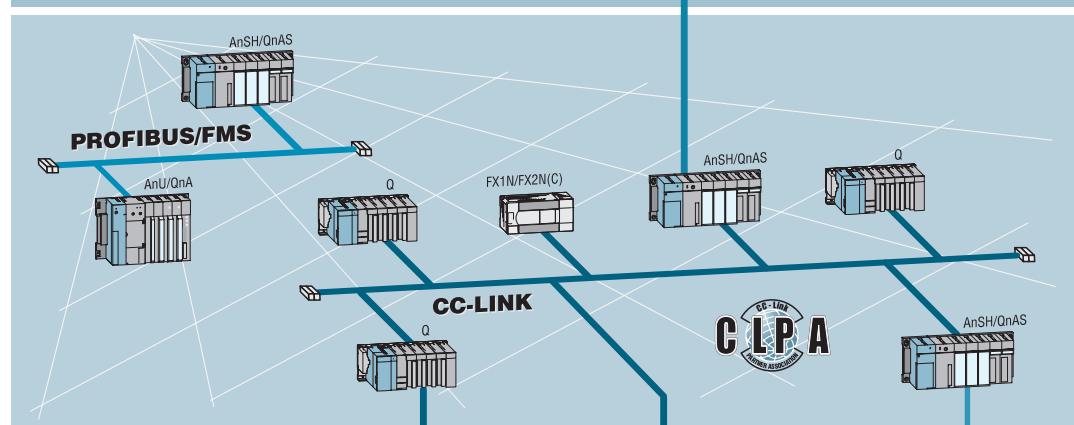

**PRODUCTION LEVEL**  
PROFIBUS/DP  
DeviceNet  
AS-Interface  
CC-Link  
CANopen

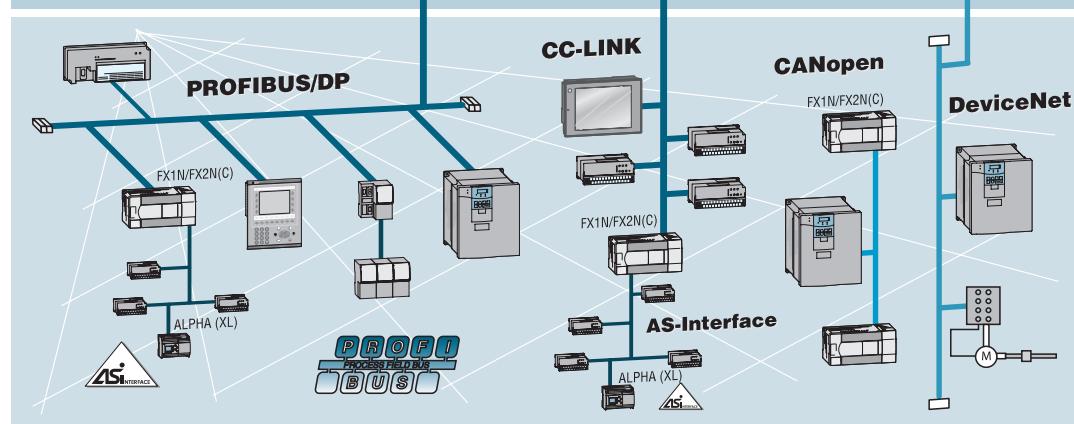

## The MELSEC FX1s Series

### Description

The MELSEC FX1s is the cost-effective entry to the MELSEC family. It was developed following user-oriented criteria and provides

- very compact package
- amazing functionality
- a significant decrease of costs

Existing FX0s/FX0N applications are terminal- and program-compatible with the new FX1s/FX1N this way making the adjustment easier.

To meet the increased demands the FX1s compared to its predecessor FX0s is extended by additional functions such as

- Incorporated positioning control
- High-speed operations
- Increased counting frequencies on the counting inputs
- Ample memory capacity and devices
- Additional setup and display functions
- Enhanced communication functions

### System Structure

- Base unit with full PLC functionality
- Integrated power supply unit
- CPU
- Maintenance-free EEPROM memory
- Integrated digital inputs and outputs
- Real-time clock
- User-friendly programming systems, including IEC 1131.3 (EN 61131)-compatible programming software, HMIs and hand-held programming units
- Accessories

### Equipment Features

Base units are available in a number of versions with different power supply and output type configurations.

You can choose between units with 230 V AC or 24 V DC power supplies and relay or transistor outputs.

All the base unit versions have the same basic CPU and performance specifications. Thanks to the extended communicational functions the FX1s can be integrated easily into a peer-to-peer or a 1:n network.

All units feature two **analog potentiometers** for setpoint value entry and an **integrated RUN/STOP switch**.

**High-speed inputs** for fast counting tasks with counting frequencies of up to 60 kHz and **interrupt processing capabilities**

The **internal service power supply unit** for 24 V DC has a capacity of 200 mA.

Integration of **interface, extension, and functions adapters** for direct installation in the base unit

**Square pulse output**  
Two **integrated high speed pulse outputs** for frequencies up to 100 kHz for outputting **pulse signals** and controlling stepping motors

**Integrated serial RS422 interface** for direct communication with computers


**Integrated real-time clock** with year, month and time

**Flexible installation** with the integrated DIN rail adapter and screw fastening hose for mounting on flat surfaces

Your PLC programs are stored in a maintenance-free **EEPROM user memory** with a capacity of 2,000 program steps, so there is no need for a backup battery to protect against power failures.

**Password access protection** facility for effective protection of your intellectual property.

## Description of the Unit

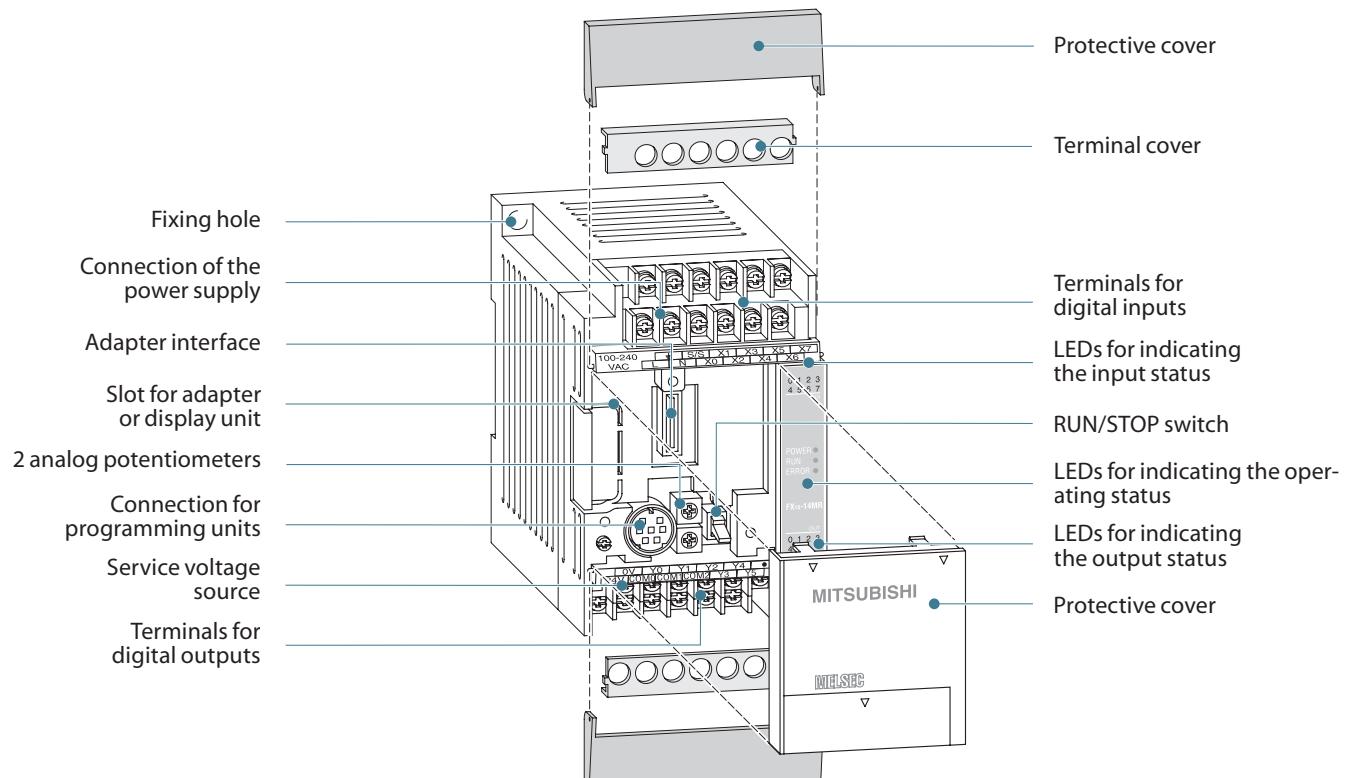

## Reference Table for Model Designation Code

FX	□□	-	14	M	R	E	S	UL						
1			2		3		4		5a		5b		6	

### The code in detail:

**FX**□□ = PLC series

**1** Designation of the PLC series

**2** Number of inputs/outputs e.g. 14 I/Os

**3** Description of the unit type:

M = base unit

E = extension unit

EX = modular input extension

EY = modular output extension

**4** Description of the output type:

R = relay

T = transistor

**5a** Power supply:

E = 100/240 V AC

D = 24 V DC

UA1 = Power source and inputs  
as AC type

**5b** Model variants:

S = Inputs selectable as sink  
or source type  
Relay outputs

SS = Inputs selectable as sink  
or source type  
Transistor outputs  
source type

**6** UL = UL certification

## General Specifications

General Specifications	Data
Ambient temperature	0 – 55 °C
Operating temperature	0 – 55 °C
Storage temperature	-20 – +70 °C
Primary power supply	24 V DC, 400 mA; ripple ratio at maximum load: $\leq \pm 5\%$
Protection	IP 20
Noise durability	1000 Vpp with noise generator; 1 $\mu$ s at 30 – 100 Hz
Dielectric withstand voltage	1500 V AC, 1 min. (500 V AC for direct voltage modules)
Ambient relative humidity	35 – 85 % (non-condensing)
Shock resistance	Acc. to IEC 68-2-27 (15 G (3 times each in 3 directions for 11 ms))
Vibration resistance	Acc. to IEC 68-2-6 (1 G: resistance to vibrations from 57 – 150 Hz for 80 minutes along all 3 axes; 0.5 G for DIN rail mounting)
Insulation resistance	500 V DC, 5 M $\Omega$
Ground	Class 3
Fuse	3 A
Environment	Avoid environments containing corrosive gases, install in a dust-free location.
Certifications	UL / CSA / CE / LR / DNV (approx. summer 2003: RINA / BV / GL / ECE)

## Specifications of Base Units

Specifications	FX1S-10 MR-DS	FX1S-10 MR-ES/UL	FX1S-10 MT-DSS	FX1S-10 MT-ESS/UL	FX1S-14 MR-DS	FX1S-14 MR-ES/UL	FX1S-14 MT-DSS	FX1S-14 MT-ESS/UL
<b>Electrical data</b>								
Max. number inputs/outputs	10	10	10	10	14	14	14	14
Power supply	AC range (+10%, -15%)	—	100–240 V AC	—	100–240 V AC	—	100–240 V AC	—
	Frequency at AC	Hz	50/60 ( $\pm 10\%$ )	—	50/60 ( $\pm 10\%$ )	—	50/60 ( $\pm 10\%$ )	—
	DC range (+10%, -15%)		24 V DC	—	24 V DC	—	24 V DC	—
Max. input apparent power	W	6	19	6	19	6.5	19	6.5
Inrush current at ON	100 V AC	—	15 A / 5 ms	—	15 A / 5 ms	—	15 A / 5 ms	—
	200 V AC	—	25 A / 5 ms	—	25 A / 5 ms	—	25 A / 5 ms	—
	24 V DC	—	15 A / 0.1 ms	—	15 A / 0.1 ms	—	15 A / 0.1 ms	—
Allowable momentary power failure time	ms	5	10	5	10	5	10	10
External current supply (24 V DC)	mA	—	400	—	400	—	400	—
<b>Inputs</b>								
Integrated inputs	6	6	6	6	8	8	8	8
Min. current for logical 1 X0→X7 / X10→∞	mA	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Response time	ms	For all units of the MELSEC FX1S series values: 10 ms (at time of shipping), adjustable from 0 to 15 ms in steps of 1 ms.						
<b>Outputs</b>								
Integrated outputs	4	4	4	4	6	6	6	6
Output	Type	Relay	Relay	Transistor	Transistor	Relay	Transistor	Transistor
Switching voltage (max.)	V	Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC						
Max. output current	- per output	A	2	0.5	0.5	2	0.5	0.5
	- per group*	A	8	0.8	0.8	8	0.8	0.8
Max. switching current	- inductive load	VA	80 VA	12 W	12 W	80 VA	12 W	12 W
	- lamp load	W	100	100	0.9	100	0.9	0.9
Response time	ms	10	10	0.2	0.2	10	0.2	0.2
Life of contacts (switching times)		For all base units of the MELSEC FX1S series values: 3000000 at 20 VA; 1000000 at 35 VA; 200000 at 80 VA						
<b>Mechanical data</b>								
Weight	kg	0.22	0.3	0.22	0.3	0.3	0.22	0.3
Dimensions (W x H x D)	mm	60 x 90 x 49	60 x 90 x 75	60 x 90 x 49	60 x 90 x 75	60 x 90 x 49	60 x 90 x 75	60 x 90 x 75
<b>Order information</b>		Art. no.	141240	141243	141246	139435	141247	141248
<b>Accessories</b>		Power supply 24 V DC for DIN rail mounting (see page 76)						

\* The limitation applies only per reference terminal for each group, 4 and 8 outputs for relays and 2 and 4 outputs for transistors. Please observe the terminal assignments for the group identification.


## Programming Specifications

System Specifications	
<b>Program data</b>	
Program memory	2.000 steps EEPROM (internal)
Program execution	Periodical execution of the stored program
Program protection	Password protection with 3 protection levels
Number of instructions	29 sequence instructions, 2 step ladder instructions, 89 applied instructions
Cycle period	0.55 – 0.7 µs / log. instruction
<b>Operands</b>	
Internal relays	512 total, with 384 general (M0 – M383) and 128 buffered (M384 – M511)
Special relays	256 (M8000 – M8255)
Step relays	128
Timers	63 (max. 63 timers, partially switchable to 100 ms, 10 ms and 1 ms)
External setpoint entry via potentiometer	2 potentiometers
Counter	32 (16 bit), C0 – C31
High-speed counter inputs	1 phase: 6 input for max. 60 kHz, 2 phases: 2 inputs for max. 30 kHz
Data register	256 subtotal (128 common (D0 – D127) and 128 buffered (D128 – D255))
Index register	16
Special register	256 (16 bit), D8000 – D8255
Pointer	64, P0 – P63
Nesting operands	8, N0 – N7
Interrupt inputs	6
Constants	16 bits: K: -32768 to +32767, hex: 0–FFFF 32 bits: K: 2147483648 to +2147483647, hex: 0–FFFF FFFF

## Specifications of Base Units

FX1S-20 MR-DS	FX1S-20 MR-ES/UL	FX1S-20 MT-DSS	FX1S-20 MT-ESS/UL	FX1S-30 MR-DS	FX1S-30 MR-ES/UL	FX1S-30 MT-DSS	FX1S-30 MT-ESS/UL
20	20	20	20	30	30	30	30
—	100–240 V AC	—	100–240 V AC	—	100–240 V AC	—	100–240 VAC
—	50/60 (±10 %)	—	50/60 (±10 %)	—	50/60 (±10 %)	—	50/60 (±10 %)
24 V DC	—	24 V DC	—	24 V DC	—	24 V DC	—
7	20	7	20	8	21	8	21
—	15 A / 5 ms	—	15 A / 5 ms	—	15 A / 5 ms	—	15 A / 5 ms
—	25 A / 5 ms	—	25 A / 5 ms	—	25 A / 5 ms	—	25 A / 5 ms
15 A / 0.1 ms	—	15 A / 0.1 ms	—	15 A / 0.1 ms	—	15 A / 0.1 ms	—
5	10	5	10	5	10	5	10
—	400	—	400	—	400	—	400
12	12	12		16	16	16	16
4.5 / 3.5	4.5 / 3.5	4.5 / 3.5		4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5
1.5	1.5	1.5		1.5	1.5	1.5	1.5
For all units of the MELSEC FX1S series values: 10 ms (at time of shipping), adjustable from 0 to 15 ms in steps of 1 ms.							
8	8	8	8	14	14	14	14
Relay	Relay	Transistor	Transistor	Relay	Relay	Transistor	Transistor
Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC							
2	2	0.5	0.5	2	2	0.5	0.5
8	8	0.8	0.8	8	8	0.8	0.8
80 VA	80 VA	12 W	12 W	80 VA	80 VA	12 W	12 W
100	100	0.9	0.9	100	100	0.9	0.9
10	10	0.2	0.2	10	10	0.2	0.2
For all base units of the MELSEC FX1S series values: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA							
0.3	0.4	0.3	0.4	0.35	0.45	0.35	0.45
75 x 90 x 49	75 x 90 x 75	75 x 90 x 49	75 x 90 x 75	100 x 90 x 49	100 x 90 x 75	100 x 90 x 49	100 x 90 x 75
141251	141252	141254	139437	141255	141256	141257	139439
Power supply 24 V DC for DIN rail mounting (see page 76)							

## ■ Interface, Extension and Functions Adapter FX1N-□□□-BD

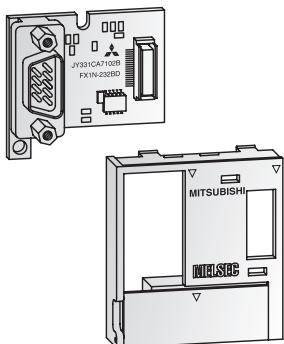

For the FX1S PLC several different interface, extension, and functions adapters are available for the direct installation in the controller.


For detailed information please refer to the chapter "Special functions modules" for the FX1N/FX2N series (see table below).

Adapter	FX1N-4EX-BD	FX1N-2EYT-BD	FX1N-2AD-BD	FX1N-1DA-BD
Function	4 digital inputs	2 transistor outputs	AD converter	DA converter
Catalogue reference	Page 40	Page 40	Page 41	Page 42
Order information	Art. no. 139418	139420	139421	139422

Adapter	FX1N-8AV-BD	FX1N-422-BD	FX1N-232-BD	FX1N-485-BD	FX1N-CNV-BD
Function	Analog setting values	Communications interface	Communication interface	Communication interface	Adapter for special function modules*
Catalogue reference	Page 41	Page 50	Page 50	Page 69	Page 71
Order information	Art. no. 130744	130741	130743	130742	130745

\* For connection to FXON-232ADP and FXON-485ADP (refer to page 49, 52 and 69)

## ■ Display Module FX1N-5DM




The display module FX1N-5DM is inserted directly into the controller and enables monitoring and editing of the data stored in the PLC.

The display module e.g. can be used instead of digital switches and external 7-segment displays in very confined areas. The following detailed functions can be performed by the FX1N-5DM:

- Bit and word device monitoring (X, Y, M and T, C, D)
- Current and set values can be altered during monitoring (T, C and D)
- Devices can be forced on and off (Y, M and S)
- Current time of the real-time clock can be displayed and set


Specifications	FX1N-5DM
Environmental specifications	Conforms to FX1S base units
Power supply	5 V DC ±5 % (from base unit)
Current consumption	mA
Display	LCD (backlight)
Weight	kg
Dimensions (W x H x D)	mm
Order information	
Art. no. 129197	

## ■ Control and Display Panels

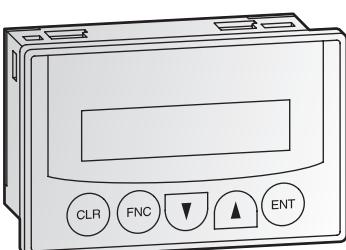

Besides the control and display panel FX-10-DM-E for the monitoring and setting of process data in the PLC (see also page 73) several other control and display panels for FX1S are available. A detailed overview of these is included in the HMI technical catalogue.

## Memory Cassette FX1N-EEPROM-8L for FX1S/FX1N



The FX1N-EEPROM-8L memory cassette provides an internal EEPROM memory with a capacity of 2,000 steps PLC program for the FX1s.

Moreover, the program can be transferred with this memory cassette from the memory of one FX1s or FX1N controller to another without any programming unit.

### Specifications


### FX1N-EEPROM-8L

Environmental specifications	Conforms to FX1s base units
Power supply	5 V DC ±5 % (from base unit)
Dimensions (W x H x D)	mm 33 x 30 x 9

### Order information

Art. no. 130746

## Simulation Strip: Input-SIM for FX1S/FX1N

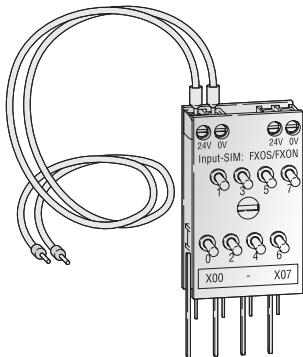

The simulation strip has 8 switches for simulating digital inputs.  
The strip is directly mounted to the terminals of the unit and fixed with screws to the terminal block.  
A cable is provided for connecting the strip to the power supply.

The simulation strip is applicable for all PLCs of the MELSEC FX1s and FX1N series.  
The simulation strip can be expanded with another strip for further inputs.

### Specifications


### Input-SIM: FX1s/FX1N

Switches	8
Dimensions (W x H x D)	mm 30 x 50 x 15

### Order information

Art. no. 65081

## Simulation Box

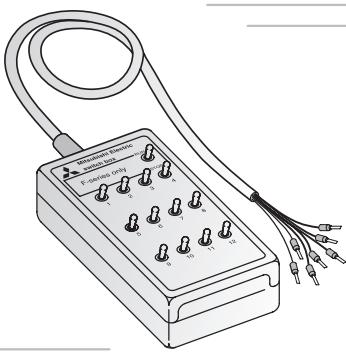

The simulation box has 12 switches for simulating digital inputs.  
It can be used on all controllers of the MELSEC FX family.

### Specifications

### Simulation Box

Switches	12
Dimensions (W x H x D)	mm 50 x 100 x 25

### Order information

Art. no. 3386

## Alarm and Telecontrol System FX-MESSENGER-SET

FX-MESSENGER-SET is an alarm and telecontrol system for GSM mobile communications networks. When a malfunction is registered it enables the FX1s PLC to send up to four SMS text messages to four different mobile phones. Using the telecontrol functions users in any location can switch four outputs of the FX1s by sending SMS text messages.

With the help of the easy-to-use FX-MESSENGER parameter-setting software you enter the required parameters such as mobile phone numbers and alarm messages offline on your PC or notebook. For operation a SIM card (3 V) is merely necessary. The FX-MESSENGER-SET can be configured as a stand-alone system or connected to any controller that uses 24V signals.

### Specifications

### Delivery schedule


PLC FX1S-10MR-DS,  
GSM modem,  
mobile phone aerial,  
FX-MESSENGER software,  
interface adapter  
FX1N-232-BD,  
connection cable

### Order information

Art. no. 141697


## Terminal Assignment of Base Units

FX1s-10MT-DSS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] • [ ]
FX1s-10MR-DS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] • [ ]
FX1s-10MT-ESS/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] • [ ]
FX1s-10MR-ES/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] • [ ]

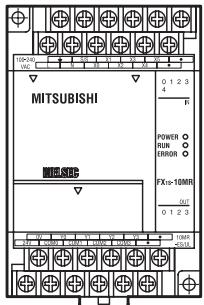


FX1s-10MR-ES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] • [ ]
FX1s-10MT-EES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] • [ ]
FX1s-10MR-DS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] • [ ]
FX1s-10MT-DSS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] • [ ]

FX1s-20MT-DSS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ]
FX1s-20MR-DS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ]
FX1s-20MT-ESS/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ]
FX1s-20MR-ES/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ]

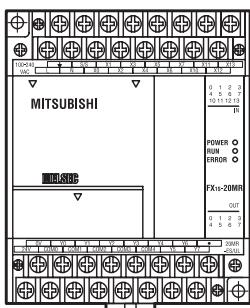


FX1s-20MR-ES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] Y4 [ ] Y6 [ ] • [ ]
FX1s-20MT-EES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] Y4 [ ] Y6 [ ] • [ ]
FX1s-20MR-DS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] Y4 [ ] Y6 [ ] • [ ]
FX1s-20MT-DSS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y3 [ ] Y4 [ ] Y6 [ ] • [ ]

FX1s-14MT-DSS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ]
FX1s-14MR-DS	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ]
FX1s-14MT-ESS/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ]
FX1s-14MR-ES/UL	[ ] [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ]

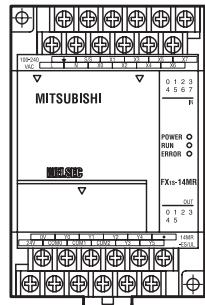


FX1s-14MR-ES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] • [ ]
FX1s-14MT-ESS/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] • [ ]
FX1s-14MR-DS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] • [ ]
FX1s-14MT-DSS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] • [ ]

FX1s-30MT-DSS	[ ] [ ] S/S [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ] X15 [ ] X17 [ ]
FX1s-30MR-DS	[ ] [ ] S/S [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ] X15 [ ] X17 [ ]
FX1s-30MT-ESS/UL	[ ] [ ] S/S [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ] X15 [ ] X17 [ ]
FX1s-30MR-ES/UL	[ ] [ ] S/S [ ] S/S [ ] X1 [ ] X3 [ ] X5 [ ] X7 [ ] X11 [ ] X13 [ ] X15 [ ] X17 [ ]

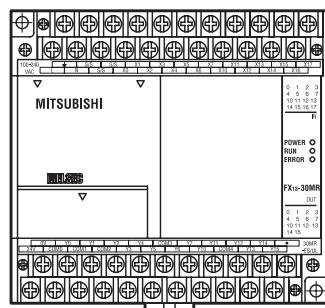

FX1s-30MR-ES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] COM3 [ ] Y7 [ ] Y11 [ ] Y12 [ ] Y14 [ ] • [ ]
FX1s-30MT-EES/UL	[ ] [ ] 0V [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] COM3 [ ] Y7 [ ] Y11 [ ] Y12 [ ] Y14 [ ] • [ ]
FX1s-30MR-DS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] COM3 [ ] Y7 [ ] Y11 [ ] Y12 [ ] Y14 [ ] • [ ]
FX1s-30MT-DSS	[ ] [ ] • [ ] Y0 [ ] Y1 [ ] Y2 [ ] Y4 [ ] COM3 [ ] Y7 [ ] Y11 [ ] Y12 [ ] Y14 [ ] • [ ]

## Dimensions of Base Units

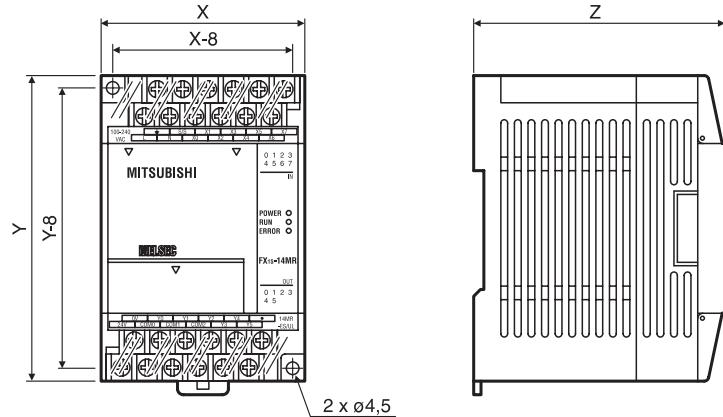

Base unit	X	Y	Z
FX1S-10MR-DS	60	90	49
FX1S-10MR-ES/UL	60	90	75
FX1S-10MT-DSS	60	90	49
FX1S-10MT-ESS/UL	60	90	75
FX1S-14MR-DS	60	90	49
FX1S-14MR-ES/UL	60	90	75
FX1S-14MT-DSS	60	90	49
FX1S-14MT-ESS/UL	60	90	75
FX1S-20MR-DS	75	90	49
FX1S-20MR-ES/UL	75	90	75
FX1S-20MT-DSS	75	90	49
FX1S-20MT-ESS/UL	75	90	75
FX1S-30MR-DS	100	90	49
FX1S-30MR-ES/UL	100	90	75
FX1S-30MT-DSS	100	90	49
FX1S-30MT-ESS/UL	100	90	75

## The MELSEC FX1 Series

### Description

Small-scale PLC offering excellent value for money.

- Small
- Fast
- Universal
- Modular expansion capability

The ability to combine the compact base units with small, modular expansion units and compact I/O expansion units makes the FX1N enormously flexible, giving you a highly economical combination of the cost benefits of compact systems with the versatile expansion capabilities of modular systems.

The FX1N series base units can be combined with all FX0N or FX2N extension units without any problems.

### System Structure

- Base unit with full PLC functionality
- Integrated power supply unit
- CPU
- Maintenance-free EEPROM memory
- Integrated digital inputs and outputs
- Extension units for adapting the controller system to the required I/O ranges and functionality
- Configurable as a slave station in peer-to-peer and 1:n networks
- Integration in different open networks with related special function modules possible
- User-friendly programming systems, including IEC 1131-3-compatible programming software, HMIs and hand-held programming units
- Wide range of accessories

### Equipment Features


Base units are available in a number of versions with different power supply and output type configurations.

You can choose between units with 100–230VAC or 12–24VDC power supplies and relay or transistor outputs.

All the base unit versions have the same basic CPU and performance specifications. As a special feature functional and interface adapters as well as a display module can be installed directly into the controller.

In comparison to the predecessor module the following features of the FX1N were further improved:

- Improved performance and functionality
- Faster processing speeds
- Enlarged counting frequency at the counter inputs
- Enhanced programming capacity
- Enhanced communications functions
- Ample device range

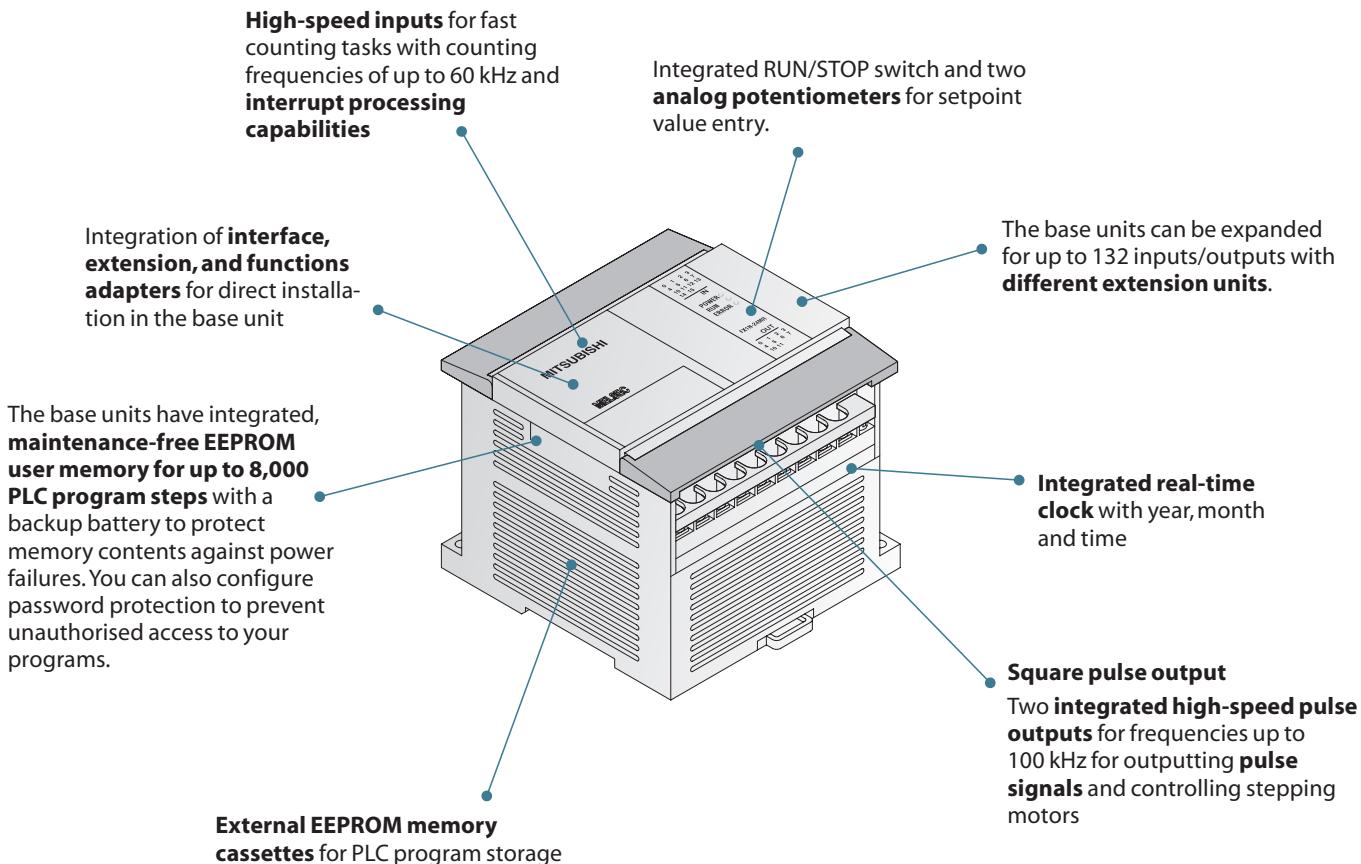

## The MELSEC FX2N Series

### Description

The MELSEC FX2N series has the most powerful CPUs in the MELSEC FX family. It combines the advantages of a compact PLC with the performance boost of modular PLC systems:

- One of the fastest PLC systems available, with a program cycle period of just 0.08 µs per logical instruction
- Powerful basic instruction set with additional 125 dedicated instructions for fast, efficient programming of complex tasks
- Simple handling
- Integrated real-time clock
- Integrated PID controller with auto-tuning facility
- Floating-point math, square root function
- Big memory capacity for up to 16,000 PLC program steps

### System Structure

- Base unit with full PLC functionality
- Integrated power supply unit
- CPU
- Integrated digital inputs and outputs
- Supplementary add-in function boards for adapting the controller system to the required I/O ranges and functionality
- Integration as a master or slave station in peer-to-peer networks and as a slave station in 1:n networks
- Integration in different open networks with related special function modules possible
- Master function for a distributed I/O Link network or Actor-Sensor Interface (ASI)
- including IEC 1131.3-compatible programming software, HMI and hand-held programming units
- Wide range of accessories

### Equipment Features

A basic MELSEC FX2N PLC system consists of a stand-alone base unit. Just like the modules in the other FX series these base units contain all the PLC components, including the CPU, memory and the I/O control circuitry.

All the base unit versions in the series have the same basic CPU and performance specifications.

A total of 21 different base units are available, with between 16 and 128 I/Os in their standard configuration. Versions are available with 230 V AC and 24 V DC power supplies and relay or transistor outputs. The digital inputs are powered by the integrated power supply unit. Removable terminal blocks make reconfiguration for new tasks very quick and easy.


A range of powerful expansion and special function modules enable you to configure your setup flexibly to provide the precise functionality and I/O specifications required by your application.

You can add I/Os to the base units by installing modular expansion units with 8 or 16 additional I/Os each. You can also add a range of compact expansion units and special function modules – for example for processing analog signals, for positioning tasks and to provide additional interfaces.

**Integrated high-speed counter inputs** for processing fast input signals. For example, you can configure two 60 kHz counters or four 10 kHz counters.

**Interrupt processing** is also handled via the inputs.

Add-in function boards can be installed in the PLC to provide a **second RS485 / RS422 / RS232 communications interface** for programming or network configurations. An add-in function board with 8 analog potentiometers is also available.

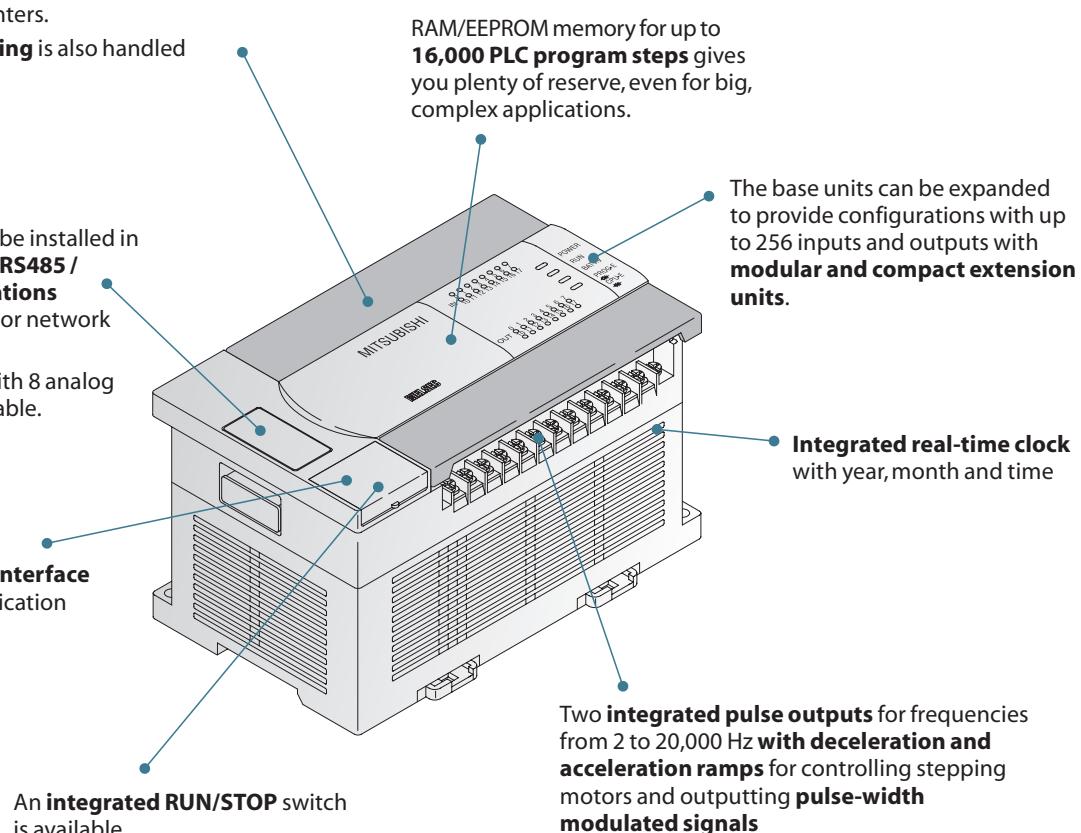

## The MELSEC FX2NC Series

### Description

The MELSEC FX2NC series complements the MELSEC FX2N. Its technical specifications are virtually identical; the main difference is that it is significantly more compact than the FX2N, which makes it the ideal choice for applications where little space is available for the controller hardware.

In detail the PLC offers the following performance features:

- One of the fastest PLC systems available, with a program cycle period of just 0.08 µs per logical instruction
- Powerful basic instruction set with additional 125 dedicated instructions for fast, efficient programming of complex tasks
- Easy to use
- Integrated PID controller with auto-tuning facility
- Floating-point math and square root function are available
- Big memory capacity for up to 16,000 PLC program steps

### System Structure

- Base unit with full PLC functionality
- CPU
- Integrated digital inputs and outputs
- Extension units for adapting the controller system to the required I/O ranges and functionality
- Integration as a master or slave station in peer-to-peer networks and as a slave station in 1:n networks
- Integration in different open networks with related special function modules possible
- User friendly IEC 1131.3-compatible programming software, HMIs and hand-held programming units
- Wide range of accessories


### Equipment Features

Like all other members of the FX2NC family, a PLC system of the MELSEC FX2NC series consists of a fully-integrated base unit that contains all the necessary PLC components, from the CPU to memory and the I/O controller.

All the base units have the same CPU and the same performance features, they differ only in the number of integrated I/Os.


The FX2NC base units are configured for a 24 V DC power supply and available in versions with 16, 32, 64 or 96 I/Os. Extension modules with 16 or 32 inputs and outputs can be added to expand the system up to a maximum of 256 I/Os.

All the expansion and special function modules of the FX family are compatible with the FX2NC. The connections for the inputs and outputs are located on the front of the unit and can be wired with ribbon cable connectors or removable screw or spring terminals. Remote I/O interface modules with system cabling sets are available for the ribbon cable connectors.

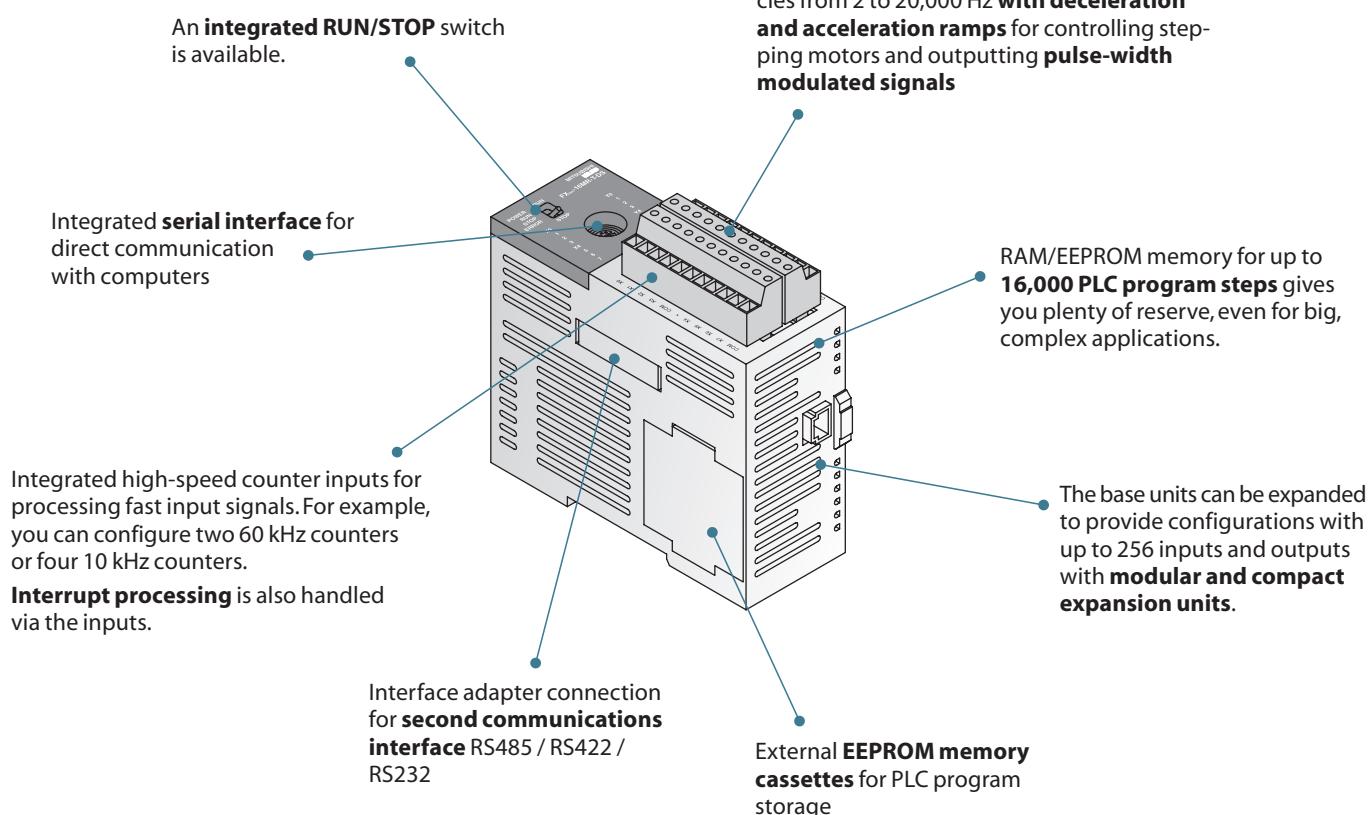


## Description of Units

### ■ FX1N Series

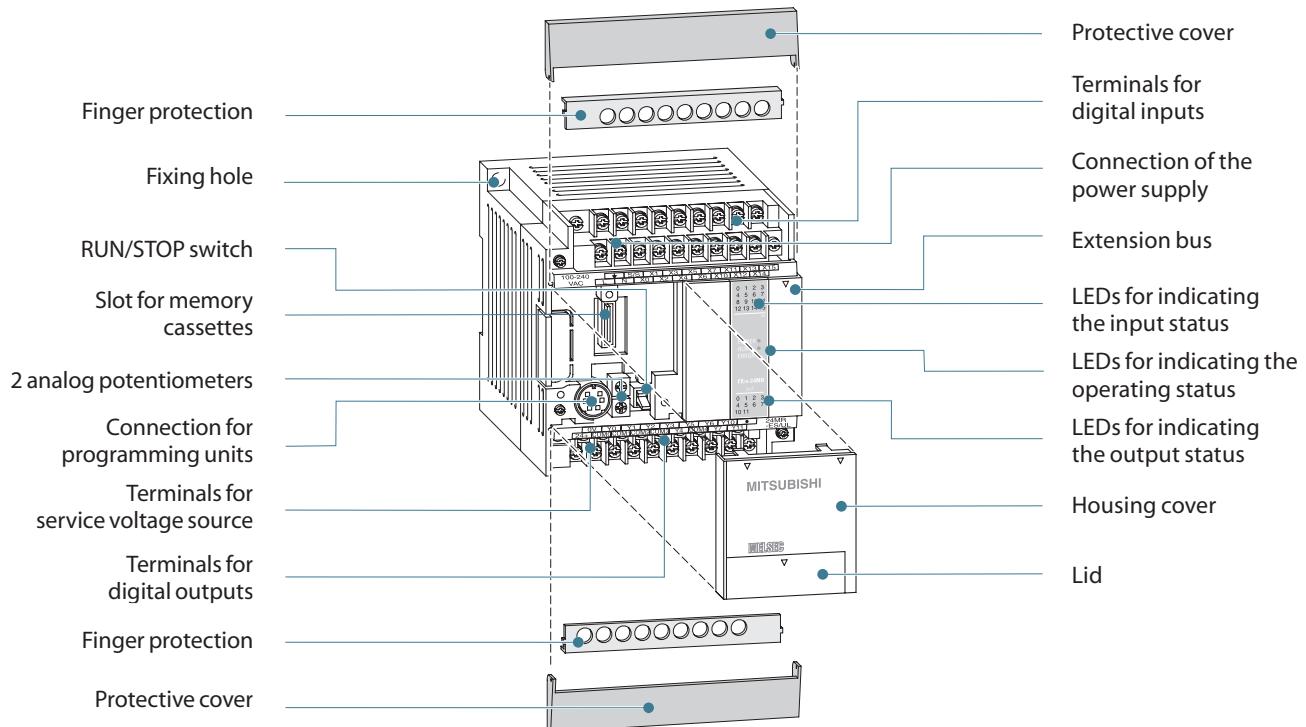


### ■ FX2N Series

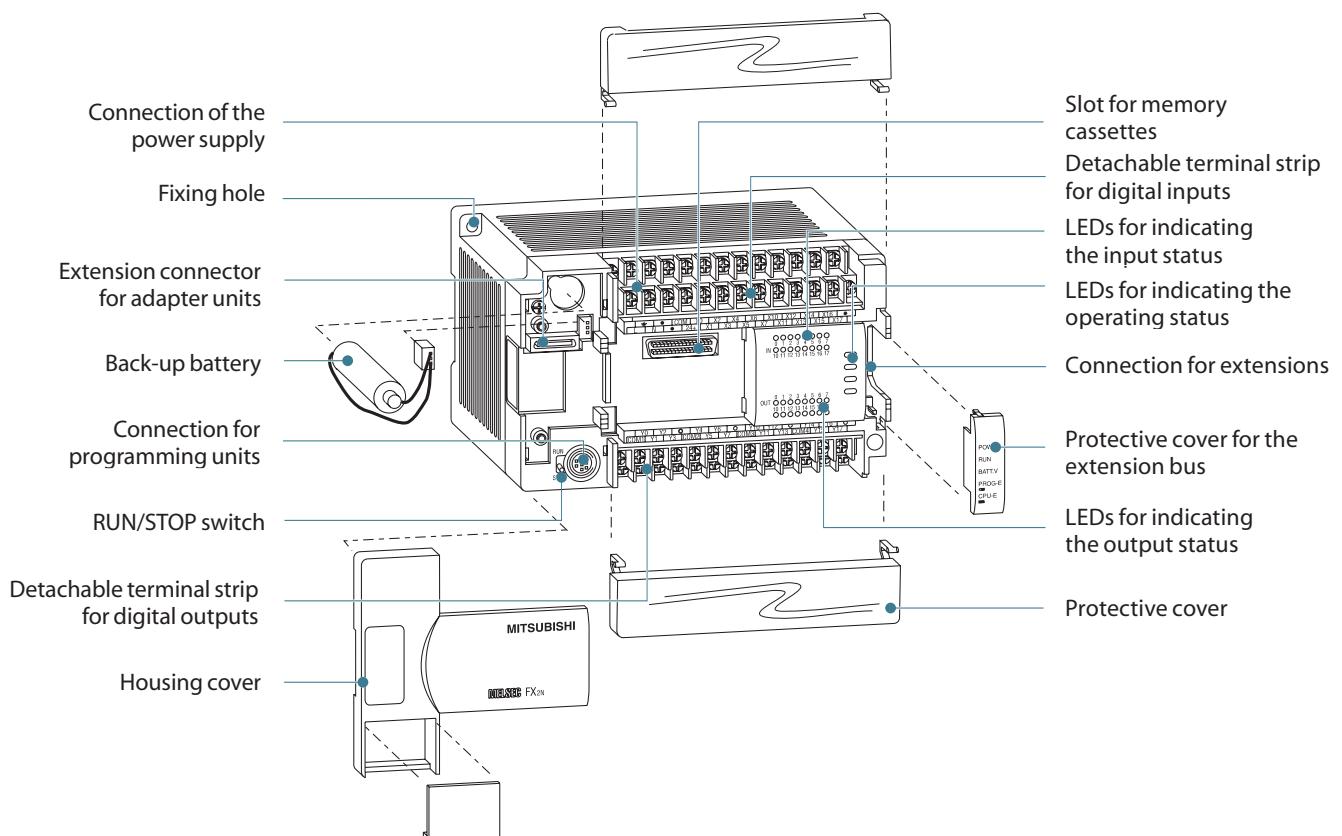

## Description of Units


### ■ FX2NC Series

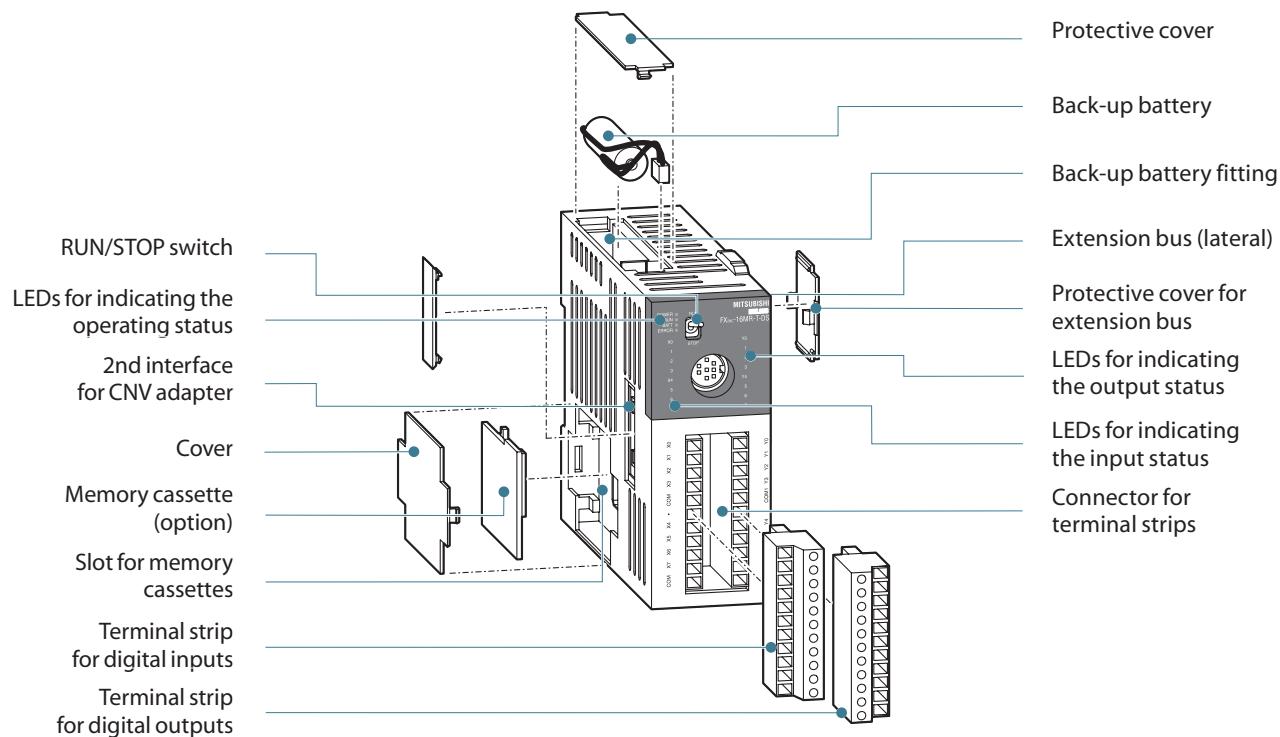

## System Cabling

A choice of terminal blocks with screw or spring terminals are available for easy wiring of the FX2NC modules with standard ribbon cable connectors.

For details see the *Accessories* section.

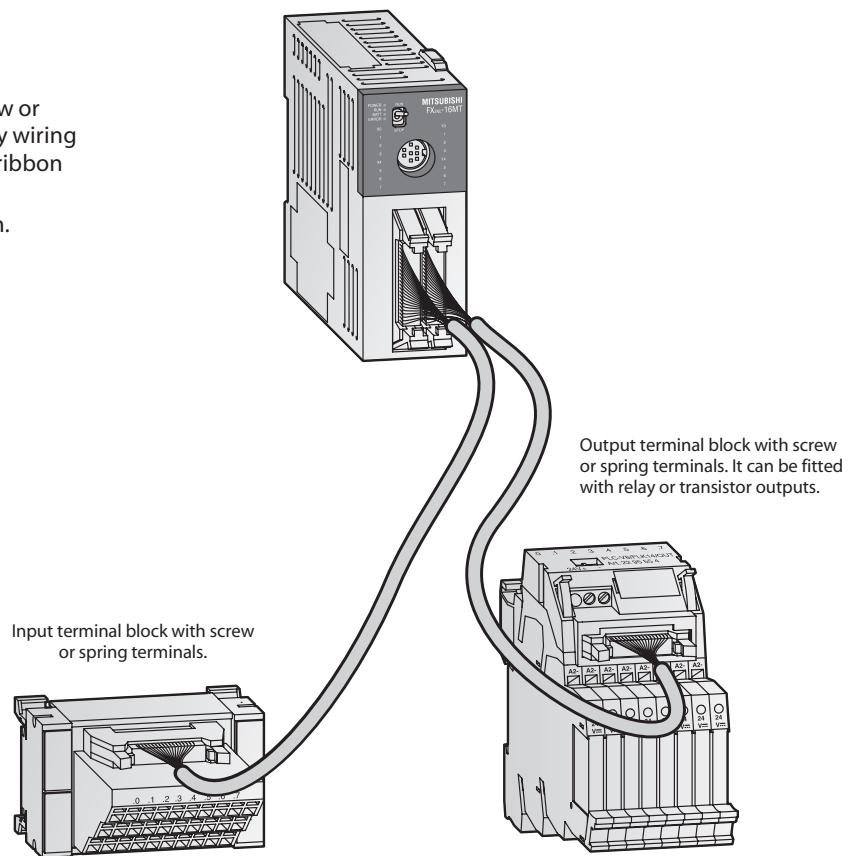

## Combining Units from Different Series


The I/O expansion modules and special function modules from the two series can be combined at will, subject to the restrictions imposed by the differences between the systems.

For example, you can use all the modules for the FXON or FX2N series in combination with a base unit from the FX2N/FX2NC series. Combined use of modules from both series is also possible.


A special conversion adapter is available for connecting modules from the old FX series to the base units of the FX1N/FX2N/FX2NC series (designation: FX1N-CNV-IF for FX1N and FX2N-CNV-IF for FX2N/FX2NC).

The tables and figures below show the restrictions and other special requirements that apply for combined use of modules from different systems.

Series	FX1N	FX2N	FX2NC
<b>Restrictions</b>	The FXON/FX2N special function modules are useable without restrictions. Up to 2 modules are connectable.	The FXON/FX2N special function modules are useable without restrictions. Up to 8 modules are connectable.	The FXON/FX2N special function modules are useable without restrictions. Up to 4 modules are connectable.
<b>Special requirements</b>	The modules FXON-485ADP and FXON-232ADP are connected to the left of the CPU and require function board FX1N-CNV-BD for connection to the FX1N.	The modules FXON-485ADP and FXON-232ADP are connected to the left of the CPU and require function board FX2N-CNV-BD for connection to the FX2N.	The modules FX2NC-485ADP and FX2NC-232ADP are connected directly to the left side of the FX2NC PLC CPU.

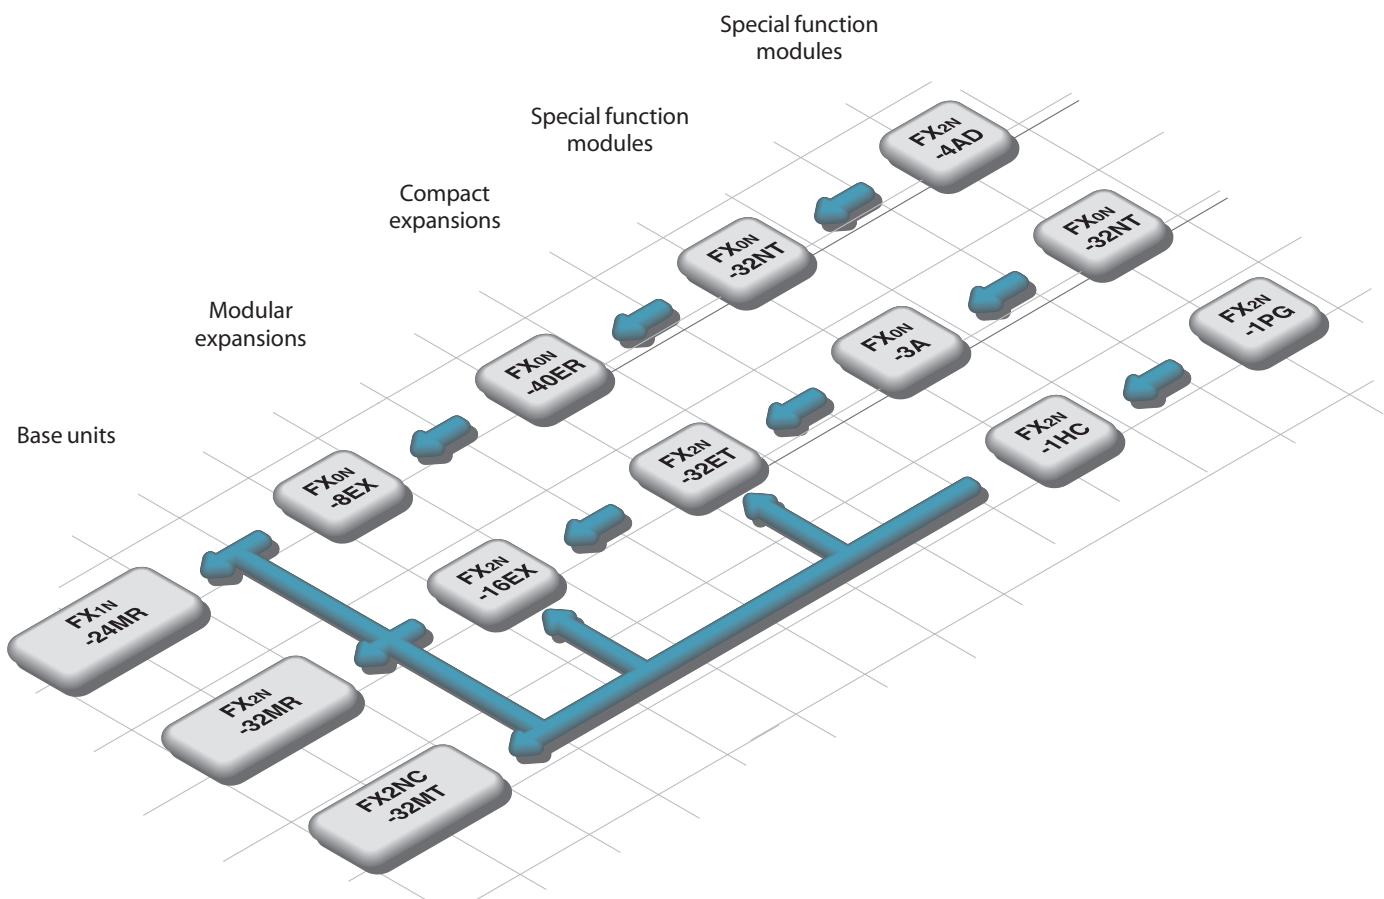

## Special Function Modules MELSEC FX1N/FX2N

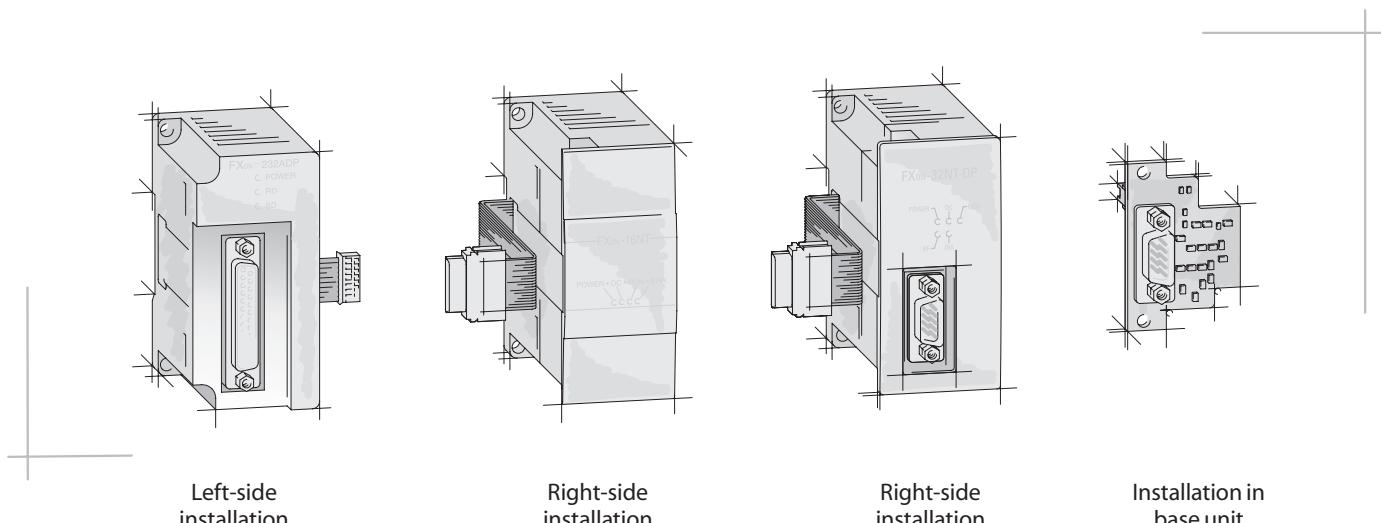 FX1N    FX2N    FX2NC
**General**

Additional special function modules are available that make it possible to extend the capacity of the basic and extension units of your PLC system.

There are three basic categories of special function modules:

- Modules that occupy digital I/Os (connected on the right hand side of the base unit). These are the digital compact and modular extension units as well as the special function modules.
- Modules of the FXON and FX2NC series that do not occupy any digital I/Os (connected on the left hand side of the base unit). These are the FXON-232ADP or FX2NC-232ADP, the FXON-485ADP or FX2NC-485ADP and the Ethernet module COM-ET10-T.
- Internal adapter boards for the FX1s/FX1N series and the FX2N series. These expansion units are installed directly in the base unit and do not occupy any digital I/Os.

**FX1N series configuration notes**

The configuration specifications for the FX1N series permit connection of the following combinations of extension units to the base units:

- a maximum of 2 special function modules or
- digital expansion modules with up to 32 inputs and outputs (4 x 8 I/Os or 2 x 16 I/Os) or
- one special function module and one digital extension module with up to 16 inputs and outputs (2 x 8 I/Os or 1 x 16 I/Os)

The same configuration specifications apply for the connection of compact expansion modules (limited to 128 I/Os). Provided you observe these rules the system's power supply will also be adequate to provide the 5 V DC input required by the FXON-232ADP communications module.

Similarly, the power supply for HMIs such as the MAC E series operator terminals or the programming tools is provided via the system's 5 V bus.

**FX2N/FX2NC series configuration notes**

The configuration specifications for the FX2N/FX2NC series permit connection of the following combinations of units:

- a maximum of 8 special function modules for the FX2N and a maximum of 4 special function modules for the FX2NC or
- digital extension modules with up to 256 I/Os

Please note that it is important to calculate the connected load to ensure that the internal 5 V bus has adequate capacity for the installed modules.

When using special function modules you must also check the 24 V power supply load – the necessary 24 V power can be drawn from the internal service power supply (FX2N only), but it may be necessary to complement this with an external power supply in some configurations.

You can calculate the precise power load with the values provided in the table on the next page.

## Calculation of the Power Consumption

The power consumption figures on the 5 V DC bus for the special function modules are shown in the specifications tables on the following pages.

The maximum permissible currents on the 5 V DC bus are shown in the table below.

Module	Max. current on 5 Vbus
FX2N-□□M□-ES(ESS)	290 mA
FX2N-□□E□-ES(ESS)	690 mA

The residual currents for the 24 V DC service voltage at different input/output configurations are shown in the tables on the right.

Special function modules have to be supplied externally, if the residual current for the service voltage is not satisfying.

A maximum of 256 I/Os is possible.

Max. residual current values (in mA) for FX2N-16M□-E□□ through FX2N-32M□-E□□, FX2N-32E□-E□□ for the permissible configuration

Number of additional outputs	24	25			
	16	100	50	0	
	8	175	125	75	25
	0	250	200	150	100
		0	8	16	24
				32	
					Number of additional inputs

Max. residual current values (in mA) for FX2N-48M□-E□□ through FX2N-128M□-E□□, FX2N-48E□-E□□ for the permissible configuration

Number of additional outputs	48	10						
	40	85	35					
	32	160	110	60	10			
	24	235	185	135	85	35		
	16	310	260	210	160	110	60	10
	8	385	335	285	235	185	135	85
	0	460	410	360	310	260	210	160
		0	8	16	24	32	40	48
					56	64		
								Number of additional inputs

## Sample Calculations

The tables below and on the right show different examples for sample power calculation for a PLC system.

The current values for the special function modules can be found in the specifications on the following pages.

Comparison with the current value tables show that the calculated figures for the 5 V bus lie within the allowable ranges.

In the example below all units can be supplied sufficiently with the internal 24 V power supply.

FX1N  FX2N  FX2NC

Module	No.	24 V DC calculation		5 V DC calculation	
		Current / module	Calculation	Current / module	Total current
FX2N-80MR-ES	1	460 mA	+460 mA	+290 mA	+290 mA
FX2N-4AD	3	50 mA	-150 mA	30 mA	-90 mA
FX2N-4DA	2	200 mA	-400 mA	30 mA	-60 mA
FX2N-232IF	1	80 mA	-80 mA	40 mA	-40 mA
			-170 mA !!!		290 – 190 mA
					Result: 100 mA (OK !)


An external 24 V power supply has to be added in the example above.

Module	No.	Number of I/Os			24 V DC calculation		5 V DC calculation	
		X	Y	X/Y	Total <sup>①</sup>	Total current <sup>②</sup>	Current / module	Total current
FX2N-48MR-ES/UL	1	24	24	—			290 mA	+290 mA
FX2N-16EYR-ES/UL	1	—	16	—	X = 8 Y = 24 →	+185 mA	—	0 mA
FX2N-8EX-ES/UL	1	8	—	—			—	0 mA
FX2N-8EYR-ES/UL	1	—	8	—			—	0 mA
FXON-3A	1	—	—	8		-90 mA	30 mA	-30 mA
						+95 mA (OK!)		+260 mA (OK!)
FX2N-32ER-ES/UL	1	16	16	—	X = 16 Y = 0 →	+150 mA	690 mA	+690 mA
FX2N-16EX-ES/UL	1	16	—	—			—	0 mA
FX2N-4AD	1	—	—	8		50 mA	30 mA	-30 mA
FX2N-1HC	1	—	—	8		0 mA	90 mA	-90 mA
Result:	64 + 64 + 24 = 152 ! (< 256) OK!					+100 mA (OK!)	+570 mA (OK!)	

<sup>①</sup> Total no. of I/Os which are connected to a base unit to calculate the max. residual current values (see tables) <sup>②</sup> see tables above (max. residual current values)

## POSSIBLE CONFIGURATIONS

### Configuration Example FX1N

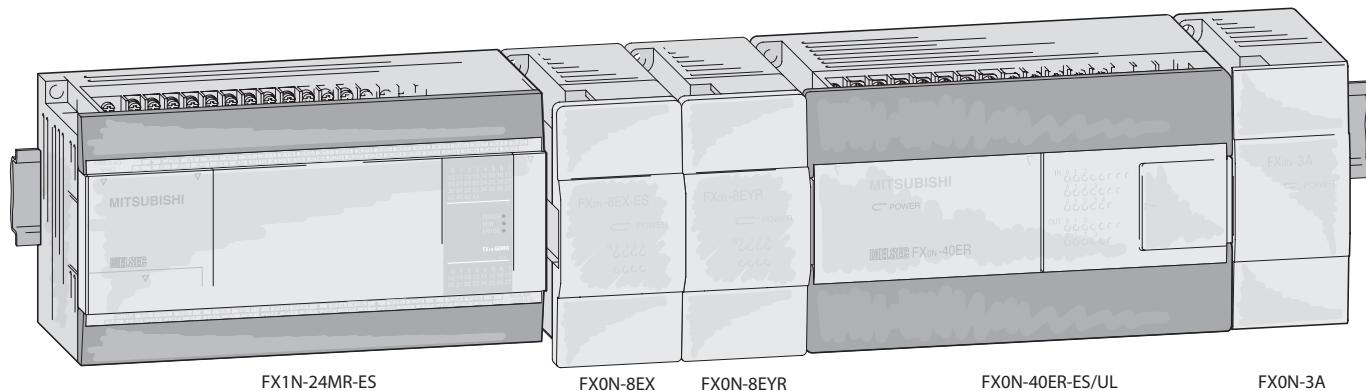


The addressing of the special function modules is independent of the addressing of the digital inputs/outputs.

An example of addressing is shown in the table on the right.

Configuration	FX1N-24MR-ES/UL	FXON-8EX-ES/UL	FXON-8EYR-ES/UL	FXON-40ER-ES/UL	FXON-3A	Total
Number	Inputs X	14	8	—	24	—
	Outputs Y	10	—	8	16	—
	Special function modules	—	—	—	8	8
Addresses	Inputs X	0–15	20–27	—	30–57	—
	Outputs Y	0–11	—	20–27	30–47	—
	Special function modules				Nr. 0	

88

### Configuration Example FX2N

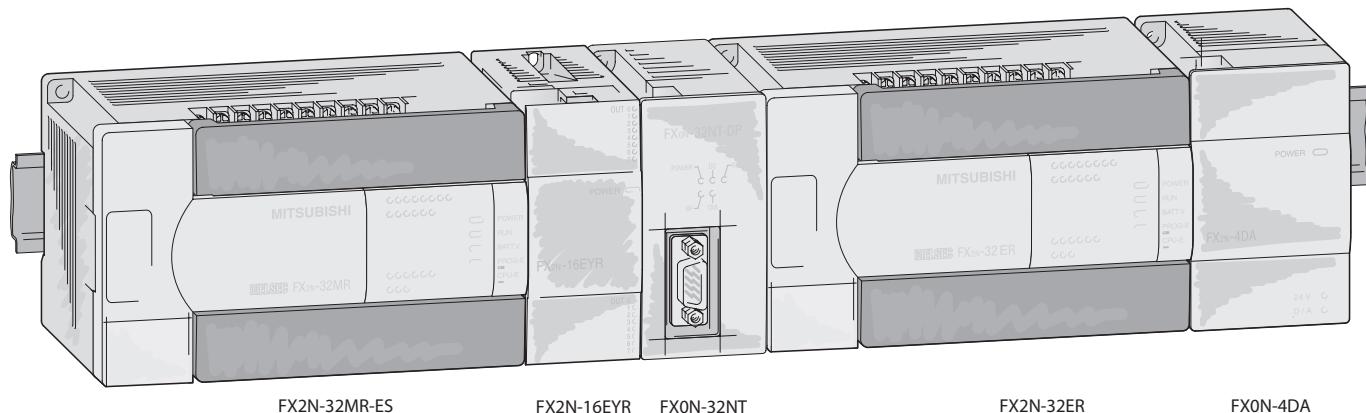

The addressing of the special function modules is independent of the addressing of the digital inputs/outputs.

An example of addressing is shown in the table on the right.

Configuration	FX2N-32MR-ES/UL	FX2N-16EYR-ES/UL	FXON-32NT/DP	FX2N-32ER-ES/UL	FXON-4DA	Total
Number	Inputs X	16	—	—	16	—
	Outputs Y	16	16	—	16	—
	Special function modules	—	—	8	—	8
Addresses	Inputs X	0–17	—	—	20–37	—
	Outputs Y	0–17	20–37	—	40–57	—
	Special function modules			Nr. 0		Nr. 1

96

## Environmental Specifications

FX1N  FX2N  FX2NC

General specifications	Data
Ambient temperature	0 – 55 °C
Operating temperature	0 – 55 °C
Storage temperature	-20 – +70 °C
Service power supply	24 V DC, 400 mA (FX1N); 250/460 mA (FX2N/FX2NC) ripple ratio at maximum load: $\leq \pm 5\%$
Protection	IP 20
Noise durability	1000 Vpp with noise generator; 1 ms at 30 – 100 Hz
Dielectric withstand voltage	1,500 V AC, 1 min.
Ambient relative humidity	35 – 85 % (non-condensing)
Shock resistance	FX1N: 15 G (3 times in 3 directions) for 11 ms; FX2N: 10 G (3 times in 3 directions)
Vibration resistance	FX1N: 1 G (resistance to vibrations from 57 – 150 Hz for 80 minutes along all 3 axes); 0.5 G for DIN rail mounting FX2N/FX2NC: 2 G (resistance to vibrations from 10 – 55 Hz for 2 hours along all 3 axes; 0.5 G for DIN rail mounting)
Insulation resistance	500 V DC, 5 MΩ
Ground	Class 3
Fuse	Up to FX1N-24□□: 1 A; from FX1N-40□□: 3 A; from FX2N-32□□: 3.15 A; from FX2N-48□□: 5 A; FX2NC-16MR-T-DS: 2.5 A; FX2NC-□□MT-DSS: 3.15 A
Environment	Avoid environments containing corrosive gases, install in a dust-free location.
Certifications	FX1N: UL/CSA/CE/DNV/LR (summer 2003: RINA/BV/GL/ECE); FX2N: UL/CSA/CE/DNV/LR/GL/RINA (summer 2003: ECE); FX2NC: UL/CSA/CE (summer 2003: ECE)

## General Specifications

FX1N  FX2N  FX2NC


System specifications	FX1N	FX2N/FX2NC
<b>Program data</b>		
I/O points (addresses)	128 (+4 optional)	256
Address range	Max. 84 inputs X0–X123, max. 64 outputs Y0–Y77	Max. 248 inputs X0–X367, max. 248 outputs Y0–Y367
Program memory	8,000 steps EEPROM (internal), exchangeable EEPROM for easy program exchange	8,000 steps RAM (internal), 4,000 steps EPROM/EPPROM cassettes (optional), 16,000 steps RAM cassettes (optional), 16,000 steps EEPROM cassettes (optional) <small>for further details refer to p. 72</small>
Cycle period	0.55 – 1.0 µs /logical instruction	0.08 µs / logical instruction
Number of instructions	29 sequence instructions, 2 step ladder instructions, 89 applied instructions	27 sequence instructions, 2 step ladder instructions, 18 verify instructions, 107 applied instructions
Programming language	Step ladder, instruction list, SFC	Step ladder, instruction list, SFC
Program execution	Cyclical execution, refresh mode processing	Cyclical execution, refresh mode processing
Program protection	Password protection with 3 protection levels	Password protection with 3 protection levels
<b>Operands</b>		
Internal relays	1,536	3,072
Special relays	256	256
Step ladder	1,000	1,000
Timer	256	256
Ext. preset value via potentiometer	2	—
Counter	235	235
High-speed counter	6 single phase inputs (max. 60 kHz), 2 double phase inputs (max. 30 kHz)	6 single phase inputs (max. 60 kHz), 2 double phase inputs (max. 30 kHz)
Real-time clock	Year, month, day, hour, minut, second, weekday	Year, month, day, hour, minut, second, weekday (FX2NC optionally)
Data register	8,000	8,000
File register	Max. 7,000 (parameter editable), Total registers = 8,000	Max. 7,000 (parameter editable), Total registers = 8,000
Index register	16	16
Special register	256	256
Pointer	128	128
Nestings	8	8
Interrupt inputs	6	6
Constants	16 bits: K: -32768 to +32767, hex: 0–FFFF 32 bits: K: 2147483648 to +2147483647, hex: 0–FFFF FFFF	16 bits: K: -32768 to +32767, hex: 0–FFFF 32 bits: K: 2147483648 to +2147483647, hex: 0–FFFF FFFF 32 bits floating point: 0, $\pm 1.175 \times 10^{-38}$ to $\pm 3.403 \times 10^{-38}$

# SPECIFICATIONS

BASICS

## ■ Base Units

FX1N  FX2N  FX2NC

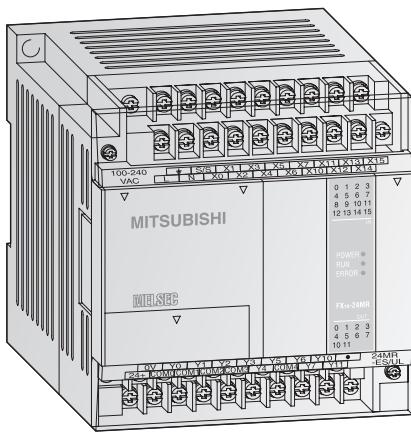

### Base Units FX1N


The FX1N series base units are available with 14, 24, 40 or 60 input/output points.

It is possible to choose between relay and transistor output type.


### Special Features:

- Integrated serial interface for communication between Personal computers and HMI
- Standard programming unit interface
- LEDs for indicating the input and output status
- Detachable terminal blocks at units with 40 and 60 I/Os
- Slot for memory cassettes
- All DC models with variable voltage from 12 up to 24 V
- Integrated real-time clock
- Exchangeable interface and I/O adapter boards for direct fitting into the base unit

Specifications	FX1N-14 MR-DS	FX1N-14 MR-ES/UL	FX1N-14 MT-DSS	FX1N-14 MT-ESS/UL	FX1N-24 MR-DS	FX1N-24 MR-ES/UL	FX1N-24 MT-DSS	FX1N-24 MT-ESS/UL
<b>Electrical data</b>								
Integrated inputs/outputs	14	14	14	14	24	24	24	24
Power supply	AC range (+10%, -15%)	—	100–240 V	—	100–240 V	—	100–240 V	—
	Frequency at AC Hz	—	50/60 ( $\pm 10\%$ )	—	50/60 ( $\pm 10\%$ )	—	50/60 ( $\pm 10\%$ )	—
	DC range (+20%, -15%)	12–24 V	—	12–24 V	—	12–24 V	—	12–24 V
Max. input apparent power	W	13	29	13	29	15	30	15
	100 V AC	—	15 A / 5 ms	—	15 A / 5 ms	—	15 A / 5 ms	—
Inrush current at ON	200 V AC	—	25 A / 5 ms	—	25 A / 5 ms	—	25 A / 5 ms	—
	24 V DC	25 A / 1 ms	—	25 A / 1 ms	—	25 A / 1 ms	—	25 A / 1 ms
	12 V DC	22 A / 0.3 ms	—	22 A / 0.3 ms	—	22 A / 0.3 ms	—	22 A / 0.3 ms
Allowable momentary power failure time	ms	5	10	5	10	5	5	10
External service power supply (24 V DC)	mA	—	400	—	400	—	—	400
<b>Inputs</b>								
Integrated inputs	8	8	8	8	14	14	14	14
Min. current for logical 1 X0→X7 / X10→∞	mA	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Response time		For all base units of the MELSEC FX1N series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms						
<b>Outputs</b>								
Integrated outputs	6	6	6	6	10	10	10	10
Output type	Relay	Relay	Transistor	Transistor	Relay	Relay	Transistor	Transistor
Max. switching voltage	V	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC						
Max. output current	- per output A	2	2	0.5	0.5	2	2	0.5
	- per group A	8	8	0.8	0.8	8	8	0.8
Max. switching power	- inductive load VA	80	80	12	12	80	80	12
	- lamp load W	100	100	1.5	1.5	100	100	1.5
Response time	ms	10	10	< 0.2 (Y0, Y1 < 5 µs)	< 0.2 (Y0, Y1 < 5 µs)	10	10	< 0.2 (Y0, Y1 < 5 µs)
Life of contacts (switching times)		For all base units of the MELSEC FX1N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA						
<b>Mechanical data</b>								
Weight	kg	0.45	0.45	0.45	0.45	0.45	0.45	0.45
Dimensions (W x H x D)	mm	90 x 90 x 75	90 x 90 x 75	90 x 90 x 75	90 x 90 x 75	90 x 90 x 75	90 x 90 x 75	90 x 90 x 75
<b>Order information</b>	Art. no.	141254	141259	141260	139440	141261	141262	141263
								139452

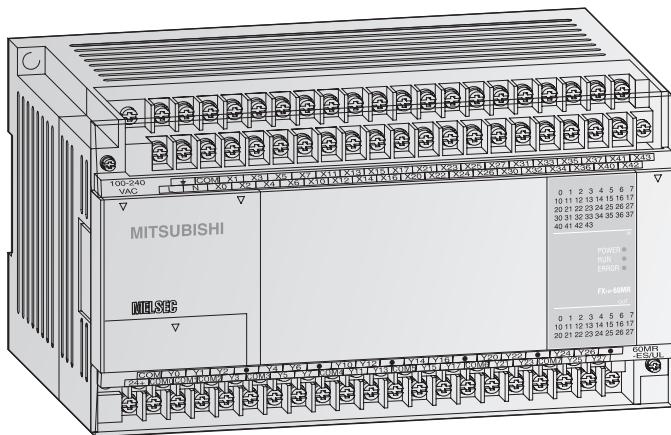**Base Units**
 FX1N    FX2N    FX2NC


Specifications	FX1N-40 MR-DS	FX1N-40 MR-ES/UL	FX1N-40 MT-DSS	FX1N-40 MT-ESS/UL	FX1N-60 MR-DS	FX1N-60 MR-ES/UL	FX1N-60 MT-DSS	FX1N-60 MT-ESS/UL
<b>Electrical data</b>								
Integrated inputs/outputs	40	40	40	40	60	60	60	60
Power supply	AC range (+10%, -15%)	—	100–240 V	—	100–240 V	—	100–240 V	100–240 V
	Frequency at AC Hz	—	50/60 (±10 %)	—	50/60 (±10 %)	—	50/60 (±10 %)	50/60 (±10 %)
	DC range (+20%, -15%)	12–24 V	—	12–24 V	—	12–24 V	—	12–24 V
Max. input apparent power	W	18	32	18	32	20	35	20
Inrush current at ON	100 V AC	—	15 A / 5 ms	—	15 A / 5 ms	—	15 A / 5 ms	15 A / 5 ms
	200 V AC	—	25 A / 5 ms	—	25 A / 5 ms	—	25 A / 5 ms	25 A / 5 ms
	24 V DC	25 A / 1 ms	—	25 A / 1 ms	—	25 A / 1 ms	—	25 A / 1 ms
	12 V DC	22 A / 0.3 ms	—	22 A / 0.3 ms	—	22 A / 0.3 ms	—	22 A / 0.3 ms
Allowable momentary power failure time	ms	5	10	5	10	5	5	10
External service power supply (24 V DC)	mA	—	400	—	400	—	400	400
<b>Inputs</b>								
Integrated inputs	24	24	24	24	36	36	36	36
Min. current for logical 1 X0→X7 / X10→∞	mA	3.5 / 4.5	3.5 / 4.5	3.5 / 4.5	3.5 / 4.5	3.5 / 4.5	3.5 / 4.5	3.5 / 4.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Response time		For all base units of the MELSEC FX1N series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms						
<b>Outputs</b>								
Integrated outputs	16	16	16	16	24	24	24	24
Output type	Relay	Relay	Transistor	Transistor	Relay	Relay	Transistor	Transistor
Max. switching voltage	V	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC						
Max. output current	- per output A	2	2	0.5	0.5	2	2	0.5
	- per group A	8	8	0.8	0.8	8	8	0.8
Max. switching power	- inductive load VA	80	80	12	12	80	80	12
	- lamp load W	100	100	1.5	1.5	100	100	1.5
Response time	ms	10	10	< 0.2 (Y0, Y1 < 5 µs)	< 0.2 (Y0, Y1 < 5 µs)	10	10	< 0.2 (Y0, Y1 < 5 µs)
Life of contacts (switching times)		For all base units of the MELSEC FX1N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA						
<b>Mechanical data</b>								
Weight	kg	0.65	0.65	0.65	0.65	0.8	0.8	0.8
Dimensions (W x H x D)	mm	130 x 90 x 75	130 x 90 x 75	130 x 90 x 75	130 x 90 x 75	175 x 90 x 75	175 x 90 x 75	175 x 90 x 75
<b>Order information</b>	Art. no.	141264	141265	141266	139454	141267	141268	141269
								139455




# SPECIFICATIONS

BASICS

## Base Units

FX1N  FX2N  FX2NC

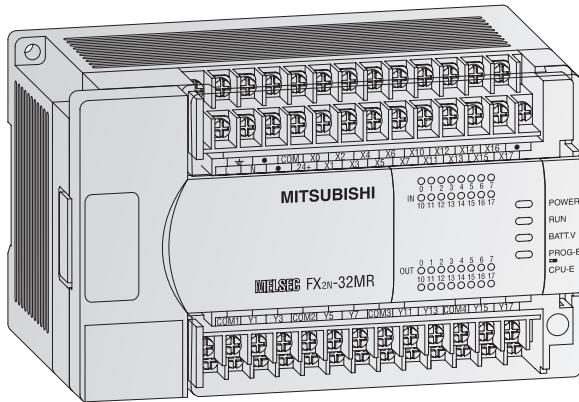

### Base Units FX2N

The FX2N series base units are available with 16, 32, 48, 64, 80 or 128 input/output points.

It is possible to choose between relay and transistor output type.


### Special Features:

- Exchangeable interface modules for direct mounting into a base unit
- Standard programming unit interface
- LEDs for indicating the input and output status
- Detachable terminal blocks
- Slot for memory cassettes for up to 16 k steps PLC program
- Integrated real-time clock

Specifications	FX2N-16 MR-DS	FX2N-16 MR-ES/UL	FX2N-16 MT-DSS	FX2N-16 MT-ESS/UL	FX2N-32 MR-DS	FX2N-32 MR-ES/UL	FX2N-32 MT-DSS	FX2N-32 MT-ESS/UL
<b>Electrical data</b>								
Integrated inputs/outputs	16	16	16	16	32	32	32	32
Power supply	AC range (+10%, -15%)	—	100–240 V	—	100–240 V	—	100–240 V	—
	Frequency at AC Hz	—	50/60 (±10 %)	—	50/60 (±10 %)	—	50/60 (±10 %)	—
	DC range (+20 %, -30 %)	24 V	—	24 V	—	24 V	—	—
Max. input apparent power	25 W	30 VA	25 W	30 VA	25 W	40 VA	25 W	40 VA
Inrush current at ON	AC 100 V	—	40 A < 5 ms	—	40 A < 5 ms	—	40 A < 5 ms	—
	AC 200 V	—	60 A < 5 ms	—	60 A < 5 ms	—	60 A < 5 ms	—
Allowable momentary power failure time	ms	5	10	5	10	5	5	10
External service power supply (24 V DC)	mA	—	250	—	250	—	250	—
Power supply int. bus (5 V DC)	mA	290	290	290	290	290	290	290
<b>Inputs</b>								
Integrated inputs	8	8	8	8	16	16	16	16
Input current X0→X7/X10→∞	mA	7/5	7/5	7/5	7/5	7/5	7/5	7/5
Min. current for logical 1 X0→X7/X10→∞	mA	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Isolation	Photocoupler isolation between input terminals and PC power for all base units.							
Response time	For all base units of the MELSEC FX2N series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms (REFF, FNC51 = 0 – 60 ms)							
<b>Outputs</b>								
Integrated outputs	8	8	8	8	16	16	16	16
Output type	Relay	Relay	Transistor	Transistor	Relay	Relay	Transistor	Transistor
ON voltage (max.)	Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC							
Max. output current	A	2	2	0.5 / 0.3 <sup>①</sup>	0.5 / 0.3 <sup>①</sup>	2	2	0.5 / 0.3 <sup>①</sup>
- per group*	A	8	8	0.8 / 1.6 <sup>②</sup>	0.8 / 1.6 <sup>②</sup>	8	8	0.8 / 1.6 <sup>②</sup>
Max. switching power	- inductive load W	80	80	12	12	80	12	12
- lamp load W	100	100	1.5	1.5	100	100	1.5	1.5
Response time	ms	10	10	< 0.2	< 0.2	10	< 0.2	< 0.2
Life of contacts (switching times)	For all base units of the MELSEC FX2N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA							
<b>Mechanical data</b>								
Weight	kg	0.6	0.6	0.6	0.65	0.65	0.65	0.65
Dimensions (W x H x D)	mm	130 x 90 x 87	130 x 90 x 87	130 x 90 x 87	130 x 90 x 87	150 x 90 x 87	150 x 90 x 87	150 x 90 x 87
<b>Order information</b>	Art. no.	141270	141271	103689	141272	141273	141274	141275

<sup>①</sup>for Y0 and Y1 = 0.3 A; all others 0.5 A    <sup>②</sup>0.8 for 4 per group and 1.6 for 8 per group

\* This limitation applies only per reference terminal for each group, 4 and 8 outputs for relays and 2 and 4 outputs for transistors. Please observe the terminal assignments for the group identification.

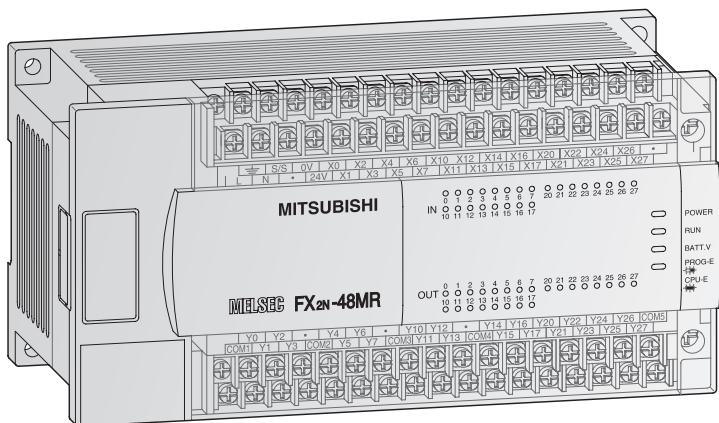**■ Base Units** FX1N  FX2N  FX2NC

FX2N-48 MR-DS	FX2N-48 MR-ES/UL	FX2N-48 MT-ESS/UL	FX2N-48 MT-DSS	FX2N-64 MR-DS	FX2N-64 MR-ES/UL	FX2N-64 MT-DSS	FX2N-64 MT-ESS/UL
48	48	48	48	64	64	64	64
—	100–240 V	100–240 V	—	—	100–240 V	—	100–240 V
—	50/60 ( $\pm 10\%$ )	50/60 ( $\pm 10\%$ )	—	—	50/60 ( $\pm 10\%$ )	—	50/60 ( $\pm 10\%$ )
24 V	—	—	24 V	24 V	—	24 V	—
30 W	50 VA	50 VA	30 W	35 W	60 VA	35 W	60 VA
—	40 A < 5 ms	40 A < 5 ms	—	—	40 A < 5 ms	—	40 A < 5 ms
—	60 A < 5 ms	60 A < 5 ms	—	—	60 A < 5 ms	—	60 A < 5 ms
5	10	10	5	5	10	5	10
—	460	460	—	—	460	—	460
290	290	290	290	290	290	290	290

24	24	24	24	32	32	32	32
7/5	7/5	7/5	7/5	7/5	7/5	7/5	7/5
4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5
1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Photocoupler isolation between input terminals and PC power for all base units.

For all base units of the MELSEC FX2N series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms (REFF, FNC51 = 0 – 60 ms)

24	24	24	24	32	32	32	32
Relay	Relay	Transistor	Transistor	Relay	Relay	Transistor	Transistor
Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC							
2	2	0.5 / 0.8 <sup>①</sup>	0.5 / 0.8 <sup>①</sup>	2	2	0.5 / 0.8 <sup>①</sup>	0.5 / 0.8 <sup>①</sup>
8	8	0.8 / 1.6 <sup>②</sup>	0.8 / 1.6 <sup>②</sup>	8	8	0.8 / 1.6 <sup>②</sup>	0.8 / 1.6 <sup>②</sup>
80	80	12	12	80	80	12	12
100	100	1.5	1.5	100	1.5	1.5	1.5
10	10	< 0.2	< 0.2	10	10	< 0.2	< 0.2

For all base units of the MELSEC FX2N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA

0.85	0.85	0.85	0.85	1.0	1.0	1.0	1.0
182 x 90 x 87	220 x 90 x 87						
141277	141278	141280	141279	141281	141282	141283	141284

<sup>①</sup>for Y0 and Y1 = 0.3 A; all others 0.5 A     <sup>②</sup>0.8 for 4 per group and 1.6 for 8 per group


\* This limitation applies only per reference terminal for each group, 4 and 8 outputs for relays and 2 and 4 outputs for transistors. Please observe the terminal assignments for the group identification.




# SPECIFICATIONS

## Base Units

FX1N  FX2N  FX2NC

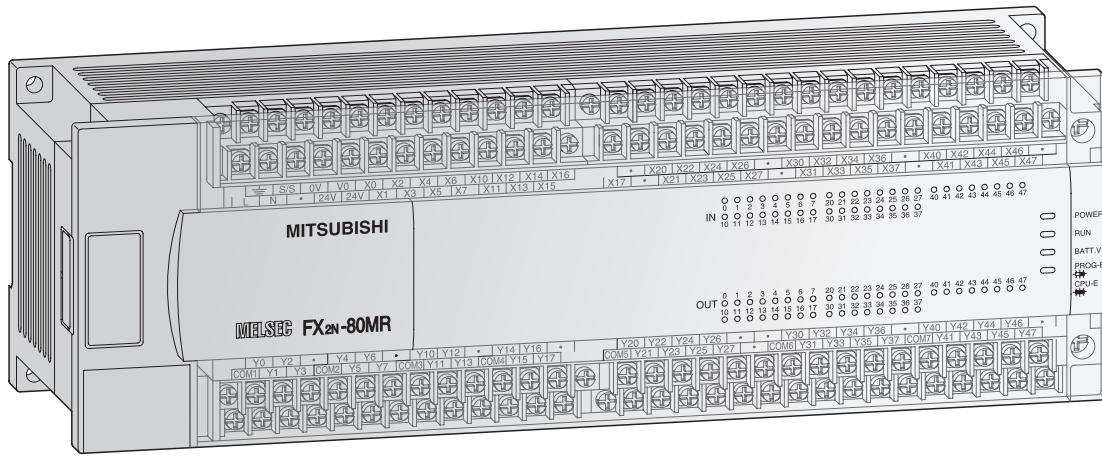

Specifications	FX2N-80 MR-DS	FX2N-80 MR-ES/UL	FX2N-80 MT-ESS/UL	FX2N-80 MT-DSS	FX2N-128 MR-ES/UL	FX2N-128 MT-ESS/UL
<b>Electrical data</b>						
Integrated inputs/outputs	80	80	80	80	128	128
Power supply	AC range (+10%, -15%)	—	100–240 V	100–240 V	—	100–240 V
	Frequency at AC Hz	—	50/60 (±10 %)	50/60 (±10 %)	—	50/60 (±10 %)
	DC range (± 8 V)	24 V	—	—	24 V	—
Max. input apparent power	40 W	70 VA	70 VA	40 W	100 VA	100 VA
Inrush current at ON	100 V AC 200 V AC	—	40 A < 5 ms 60 A < 5 ms	40 A < 5 ms 60 A < 5 ms	—	50 A < 7 ms 70 A < 7 ms
Allowable momentary power failure time	ms	5	10	10	5	10
External service power supply (24 V DC)	mA	—	460	460	—	460
Power supply int. bus (5 V DC)	mA	290	290	290	290	290
<b>Inputs</b>						
Integrated inputs	40	40	40	40	64	64
Input current X0→X7 / X10→∞	mA	7/5	7/5	7/5	7/5	7/5
Min. current for logical 1 X0→X7 / X10→∞	mA	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5	4.5/3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5
Isolation	Photocoupler isolation between input terminals and PC power for all base units.					
Response time	For all base units of the MELSEC FX2N series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms (REFF, FNC51 = 0 – 60 ms)					
<b>Outputs</b>						
Integrated outputs	40	40	40	40	64	64
Output type	Relay	Relay	Transistor	Transistor	Relay	Transistor
ON voltage (max.)	Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC					
Max. output current	A	2	0.5/0.8 <sup>①</sup>	0.5/0.8 <sup>①</sup>	2	0.5/0.8 <sup>①</sup>
- per group*	A	8	0.8/1.6 <sup>②</sup>	0.8/1.6 <sup>②</sup>	8	0.8/1.6 <sup>②</sup>
Max. switching power	- inductive load W	80	12	12	80	12
- lamp load W	W	100	1.5	1.5	100	1.5
Response time	ms	10	< 0.2	< 0.2	10	< 0.2
Life of contacts (switching times)	For all base units of the MELSEC FX2N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA					
<b>Mechanical data</b>						
Weight	kg	1.2	1.2	1.2	1.8	1.8
Dimensions (W x H x D)	mm	285 x 90 x 87	285 x 90 x 87	285 x 90 x 87	350 x 90 x 87	350 x 90 x 87
<b>Order information</b>		Art. no.	141286	141287	141289	141288
① for Y0 and Y1 = 0.3 A; all others 0.5 A		② 0.8 for 4 per group and 1.6 for 8 per group		* This limitation applies only per reference terminal for each group, 4 and 8 outputs for relays and 2 and 4 outputs for transistors. Please observe the terminal assignments for the group identification.		

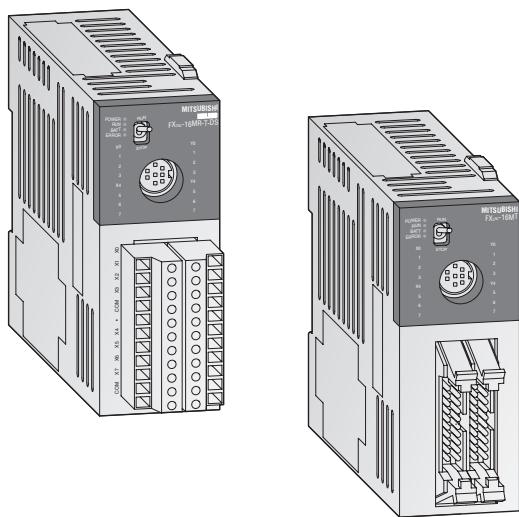**Base Units**
 FX1N    FX2N    FX2NC
**Base Units FX2NC**

The base units of the FX2NC are available in versions with 16, 32, 64 or 96 I/Os. Five output types are available: four different transistor outputs and one relay output type.

BASICS

**Special Features:**

- Very compact dimensions
- Standard programming unit interface
- LEDs for indicating the input and output status
- Removable terminal blocks (screw or spring terminals for the relay output type) or ribbon cable connectors (for the transistor output types) for system cabling
- Optional spring terminal blocks
- Slot for memory cassettes for up to 16 k steps PLC program
- Adapter modules and system cabling sets available for units with ribbon cable connectors

Specifications	FX2NC-16 MT-DSS	FX2NC-16 MR-T-DS	FX2NC-32 MT-DSS	FX2NC-64 MT-DS S	FX2NC-96 MT-DSS
<b>Electrical data</b>					
Integrated inputs/outputs	16	16	32	64	96
Power supply	AC range (+10%, -15%)	—	—	—	—
	Frequency at AC Hz	—	—	—	—
	DC range (+20 %, -15 %)	24 V	24 V	24 V	24 V
Max. input apparent power	W	6	6	8	11
Allowable momentary power failure time	ms	5	5	5	5
Power supply int. bus (5 V DC)	mA	290	290	290	290
<b>Inputs</b>					
Integrated inputs	8	8	16	32	48
Input current X0→X7 / X10→∞	mA	7 / 5	7 / 5	7 / 5	7 / 5
Min. current for logical 1 X0→X7 / X10→∞	mA	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5	4.5 / 3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5
Isolation	Photocoupler isolation between input terminals and PC power for all base units.				
Response time	For all base units of the MELSEC FX2NC series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms (REFF, FNC51 = 0 – 60 ms)				
<b>Outputs</b>					
Integrated outputs	8	8	16	32	48
Output type	Transistor				
ON voltage (max.)	Generally for relay version: < 250 V AC, < 30 V DC; for transistor version: 5 – 30 V DC				
Max. output current	A	0.1 / 0.3 <sup>①</sup>	2	0.1 / 0.3 <sup>①</sup>	0.1 / 0.3 <sup>①</sup>
- per group*	A	0.8	4 / 8	0.8	0.8
Max. switching power	- inductive load W	2.4 / 7.2 <sup>②</sup>	80	2.4 / 7.2 <sup>②</sup>	2.4 / 7.2 <sup>②</sup>
- lamp load W		0.3 / 0.9 <sup>③</sup>	100	0.3 / 0.9 <sup>③</sup>	0.3 / 0.9 <sup>③</sup>
Response time	ms	< 0.2	10	< 0.2	< 0.2
Life of contacts (switching times)	For all base units of the MELSEC FX2N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA				
<b>Mechanical data</b>					
Connection type	Ribbon cable connector				
Weight	kg	0.2	0.2	0.2	0.35
Dimensions (W x H x D)	mm	35 x 90 x 87	35 x 90 x 89	35 x 90 x 87	60 x 90 x 87
<b>Order information</b>					
Art. no.	104499	128141	104500	104501	104502

<sup>①</sup> for Y0 and Y1 = 0.3 A; all others 0.1 A   <sup>②</sup> 7.2 W for Y0 to Y3; all others 2.4 W   <sup>③</sup> 0.9 W for Y0 to Y3; all others 0.3 W

\* This limitation applies only per reference terminal for each group, 4 and 8 outputs for relays and 2 and 4 outputs for transistors. Please observe the terminal assignments for the group identification.



## Digital Inputs/Outputs

Various modular and compact extension units are available for extending the MELSEC FX1N/FX2N/FX2NC base units. In addition, the base units of the FX1S and FX1N series from CPU version 2.0 can be extended by digital inputs and outputs via extension adapters that can be installed directly in the controller. These adapters are especially advantageous when only few additional I/Os are required and when there is not enough space for an adjacent module to be installed.


The modular extension units contain only digital inputs/outputs and no separate power supply, while compact extension units contain a larger number of inputs/outputs and an integrated power supply unit for supplying the system bus and the digital inputs.

The large number of possible combinations of compact and modular extension units of the MELSEC FX1N/FX2N/FX2NC ensure that the best possible economical solution is found for every application.

Owing to the capacity of the internal power supply unit of the respective base unit or of the compact extension unit, modular expandability of the controller is possible with the help of a protected flat cable.

A base unit can be extended by a maximum of 132 (FX1N series) or 256 (FX2N and FX2NC series) external inputs/outputs by means of these extension units.

FX1N and FX2N series extension units can be combined without any problems. Extension units of the FX2NC series can be connected only to the base units of the FX2NC series.

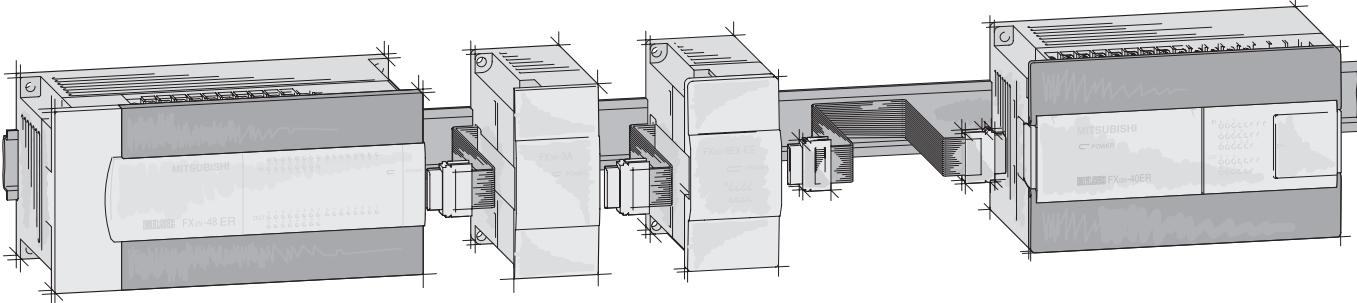

### Compact extension units

Module type	Inputs	Outputs	Output type
FXON-40ER-ES/UL	24	16	Relay
FXON-40ER-DS	24	16	Relay
FXON-40ET-DSS	24	16	Transistor

FX1N  FX2N  FX2NC

Module type	Inputs	Outputs	Output type
FX2N-32ER-ES/UL	16	16	Relay
FX2N-32ET-ESS/UL	16	16	Transistor
FX2N-48ER-ES/UL	24	24	Relay
FX2N-48ET-ESS/UL	24	24	Transistor
FX2N-48ER-DS	24	24	Relay
FX2N-48ET-DSS	24	24	Transistor

### Modular extension units

Module type	Inputs	Outputs	Output type
FXON-8EX-ES/UL	8	—	—
FXON-16EX-ES/UL	16	—	—
FXON-8EYR-ES/UL	—	8	Relay
FXON-8EYT-ESS/UL	—	8	Transistor
FXON-16EYR-ES/UL	—	16	Relay
FXON-16EYT-ESS/UL	—	16	Transistor
FXON-8ER-ES/UL	4	4	Relay

FX1N  FX2N  FX2NC

Module type	Inputs	Outputs	Output type
FX2N-16EX-ES/UL	16	—	—
FX2N-16EYR-ES/UL	—	16	Relay
FX2N-16EYT-ESS/UL	—	16	Transistor


### Extension adapters

Type	Inputs	Outputs	Output type
FX1N-4EX-BD	4	—	—
FX1N-2EYT-BD	—	2	Transistor

FX1N  FX2N  FX2NC

## Compact Extension Units

FX1N  FX2N  FX2NC

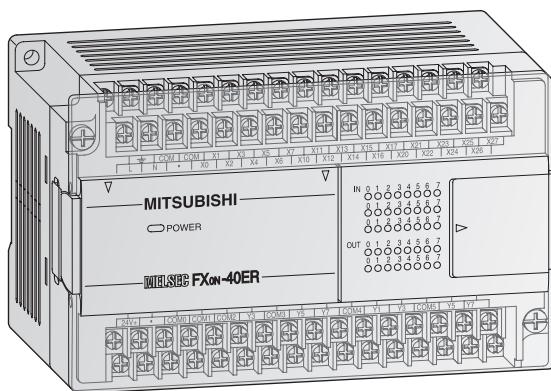

### Extension Units FXON

The FXON series extension units are available with 40 input/output points.

It is possible to choose between relay and transistor output type.


### Special Features:

- LEDs for indicating the input and output status
- MELSEC FX1N/FX2N and FX2NC series compatible
- Integrated service power supply with up to 200 mA capacity

Specifications	FXON-40 ER-ES/UL	FXON-40 ER-DS	FXON-40 ET-DSS
<b>Electrical data</b>			
Integrated inputs/outputs	40	40	40
Power supply	AC range (+10%, -15%) Frequency at AC Hz DC range (+20%, -15%)	100 – 240 V 50/60 ( $\pm 10\%$ ) —	— — 24 V 24 V
Max. input apparent power	40 VA	20 W	20 W
Inrush current at ON	100 V AC 200 V AC 24 V DC	30 A / 5 ms 50 A / 5 ms —	— — 60 A / 50 $\mu$ s 60 A / 50 $\mu$ s
Allowable momentary power failure time	ms	10	10
External service power supply (24 V DC)	mA	200	—
<b>Inputs</b>			
Integrated inputs	24	24	24
Min. current for logical 1	mA	3.5	3.5
Max. current for logical 0	mA	1.5	1.5
Response time	For all base units of the MELSEC FXON series: 10 ms (at time of shipment)		
<b>Outputs</b>			
Integrated outputs	16	16	16
Output type	Relay	Relay	Transistor
Max. switching voltage	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC		
Max. output current	- per output A - per group* A	2 —	0.5 / 0.3 <sup>①</sup> 0.8 / 1.6 <sup>②</sup>
Max. switching power	- induktive Last VA - lamp load W	80 100	12 1.5
Response time	ms	10	< 0.2
Life of contacts (switching times)	For all extension units of the MELSEC FXON series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA		
<b>Mechanical data</b>			
Weight	kg	0.6	0.6
Dimensions (W x H x D)	mm	150 x 90 x 87	150 x 90 x 87
<b>Order information</b>		Art. no.	56012
		55955	55954


<sup>①</sup> for Y0 and Y1 = 0.3 A; all others = 0.5 A    <sup>②</sup> 0.8 for 4 per group and 1.6 for 8 per group

\* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.



## Compact Extension Units

FX1N  FX2N  FX2NC

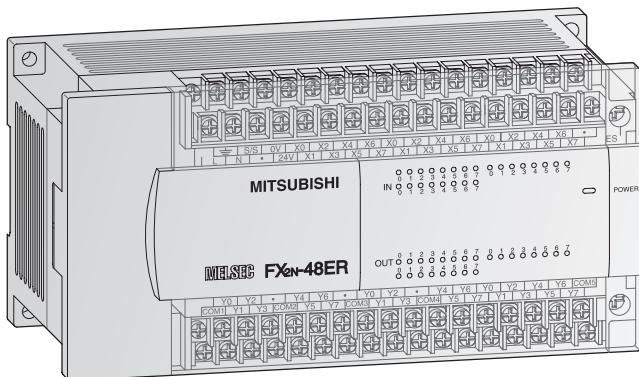

### Extension Units FX2N

The FX2N series extension units are available with 32 or 48 input/output points.

It is possible to choose between relay and transistor output type.

### Special Features:

- LEDs for indicating the input and output status
- MELSEC FX1N/FX2N and FX2NC series compatible
- Detachable terminal blocks
- Integrated service power supply with 250 mA or 460 mA


Specifications	FX2N-32 ER-ES/UL	FX2N-32 ET-ESS/UL	FX2N-48 ER-DS	FX2N-48 ER-ES/UL	FX2N-48 ET-DSS	FX2N-48 ET-ESS/UL
<b>Electrical data</b>						
Integrated inputs/outputs	32	32	48	48	48	48
Power supply	AC range (+10 %, -15 %) Frequency at AC Hz	100 – 240 V 50/60 ( $\pm 10\%$ )	100 – 240 V 50/60 ( $\pm 10\%$ )	—	100 – 240 V 50/60 ( $\pm 10\%$ )	—
DC range (+20 %, -30 %)	—	—	24 V	—	24 V	—
Max. input apparent power	35 VA	35 VA	30 W	45 VA	30 W	45 VA
Inrush current at ON	100 V AC 200 V AC	50 A < 5 ms 60 A < 5 ms	—	50 A < 5 ms 60 A < 5 ms	50 A < 5 ms 60 A < 5 ms	50 A < 5 ms 60 A < 5 ms
Allowable momentary power failure time	ms	10	10	10	10	10
External service power supply (24 V DC)	mA	250	250	—	460	—
Power supply int. bus (5 V DC)	mA	690	690	690	690	690
<b>Inputs</b>						
Integrated inputs	16	16	24	24	24	24
Min. current for logical 1	mA	3.5	3.5	3.5	3.5	3.5
Max. current for logical 0	mA	1.5	1.5	1.5	1.5	1.5
Response time	For all extension units of the MELSEC FX2N series: 10 ms (at time of shipment)					
<b>Outputs</b>						
Integrated outputs	16	16	24	24	24	24
Output type	Relay	Transistor	Relay	Relay	Transistor	Transistor
ON voltage (max.)	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC					
Max. output current	- per output A - per group * A	2 8	0.5 / 0.3 <sup>①</sup> 0.8 / 1.6 <sup>②</sup>	2 8	0.5 / 0.3 <sup>①</sup> 0.8 / 1.6 <sup>②</sup>	0.5 / 0.3 <sup>①</sup> 0.8 / 1.6 <sup>②</sup>
Max. switching power	- inductive load W - lamp load W	80 100	12 1.5	80 100	80 100	12 1.5
Response time	ms	10	< 0.2	10	10	< 0.2
Life of contacts (switching times)	For all extension units of the MELSEC FX2N series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA					
<b>Mechanical data</b>						
Weight	kg	0.65	0.65	0.85	0.85	0.85
Dimensions (W x H x D)	mm	150 x 90 x 87	150 x 90 x 87	182 x 90 x 87	182 x 90 x 87	182 x 90 x 87
<b>Order information</b>						
Art. no.	65568	65569	66633	65571	66634	65572

<sup>①</sup> for Y0 and Y1 = 0.3 A; all others = 0.5 A    <sup>②</sup> 0.8 for 4 per group and 1.6 for 8 per group

\* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.

## ■ Modular Extension Units

FX1N  FX2N  FX2NC

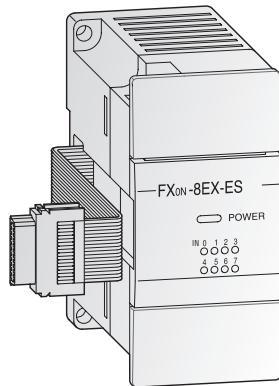

### Extension Units FXON

The FXON series modular extension units are available with 4, 8 or 16 input/output points.

It is possible to choose between relay and transistor output type.

#### Special Features:

- LEDs for indicating the input and output status
- MELSEC FX1N/FX2N and FX2NC series compatible
- Vertically (at 8 I/Os) or horizontally mounted (at 16 I/Os) terminal blocks with a cable guide to the upper or lower side


Specifications	FXON-8 ER-ES/UL	FXON-8 EX-ES/UL	FXON-8 EYR-ES/UL	FXON-8 EYT-ESS/UL	FXON-16 EX-ES/UL	FXON-16 EYR-ES/UL	FXON-16 EYT-ESS/UL
<b>Electrical data</b>							
Integrated inputs/outputs	8	8	8	8	16	16	16
Power supply							
All modular extension units are supplied by the base unit.							
<b>Inputs</b>							
Integrated inputs	4	8	—	—	16	—	—
Min. current for logical 1	mA 3.5	3.5	—	—	3.5	—	—
Max. current for logical 0	mA 1.5	1.5	—	—	1.5	—	—
Response time	For all extension units of the MELSEC FXON series : 10 ms						
<b>Outputs</b>							
Integrated outputs	4	—	8	8	—	16	16
Output type	Relay	—	Relay	Transistor	—	Relay	Transistor
Max. switching voltage	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC						
Max. output current	- per output A 2	—	2	0.5 / 0.3 <sup>①</sup>	—	2	0.5 / 0.3 <sup>①</sup>
	- per group A	—	—	0.8 / 1.6 <sup>②</sup>	—	—	0.8 / 1.6 <sup>②</sup>
Max. switching power	- inductive load VA 80	—	80	12	—	80	12
	- lamp load W 100	—	100	1.5	—	100	1.5
Response time	ms 10	10	10	< 0.2	10	10	< 0.2
Life of contacts (switching times)	For all extension units of the MELSEC FXON series: 3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA						
<b>Mechanical data</b>							
Weight	kg 0.2	0.2	0.2	0.2	0.3	0.3	0.3
Dimensions (W x H x D)	mm 43 x 90 x 87	43 x 90 x 87	43 x 90 x 87	43 x 90 x 87	70 x 90 x 87	70 x 90 x 87	70 x 90 x 87
<b>Order information</b>							
Art. no.	60023	60013	60014	60016	55952	55951	55950

<sup>①</sup> for Y0 and Y1 = 0.3 A; all others = 0.5 A    <sup>②</sup> 0.8 for 4 per group and 1.6 for 8 per group

\* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.

## ■ Modular Extension Units

FX1N  FX2N  FX2NC

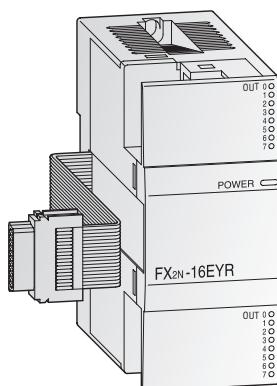

### Extension Units FX2N

The FX2N series modular extension units are available with 16 input/output points.

It is possible to choose between relay and transistor output type.

#### Special Features:



- LEDs for indicating the input and output status
- MELSEC FX1N/FX2N and FX2NC series compatible
- Especially compact design
- Vertically mounted terminal blocks with a cable guide to the upper or lower side

Specifications	FX2N-16 EX-ES/UL	FX2N-16 EYR-ES/UL	FX2N-16 EYT-ESS/UL
<b>Electrical data</b>			
Integrated inputs/outputs	16	16	16
Power supply	All modular extension units are supplied by the base unit.		
<b>Inputs</b>			
Integrated inputs	16	—	—
Min. current for logical 1	mA 3.5	—	—
Max. current for logical 0	mA 1.5	—	—
Response time	For all base units of the MELSEC FX2N series: 10 ms (at time of shipment)		
<b>Outputs</b>			
Integrated outputs	—	16	16
Output type	—	Relay	Transistor
ON voltage (max.)	V	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC	
Max. output current	- per output A —	2	0.5 / 0.3 <sup>①</sup>
	- per group A —	—	0.8 / 1.6 <sup>②</sup>
Max. switching power	- inductive load VA —	80	12
	- lamp load W —	100	1.5
Response time	ms —	10	< 0.2
Life of contacts (switching times)	—	Same as base unit	—
<b>Mechanical data</b>			
Weight	kg 0.3	0.3	0.3
Dimensions (W x H x D)	mm 40 x 90 x 87	40 x 90 x 87	40 x 90 x 87
<b>Order information</b>			
Art. no.	65776	65580	65581

<sup>①</sup> for Y0 and Y1 = 0.3 A; all others = 0.5 A    <sup>②</sup> 0.8 for 4 per group and 1.6 for 8 per group

\* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.

## ■ Modular Extension Units

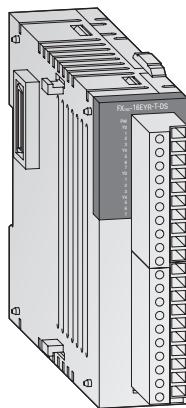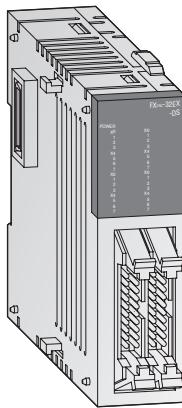 FX1N    FX2N    FX2NC


### Modular Extension Units FX2NC

The FX2NC series extension units are available with 16 or 32 input/output points.

For modules with 16 outputs it is possible to choose between relay and transistor output type.

#### Special Features:

- Very compact dimensions
- LEDs for indicating the input and output status
- Removable terminal blocks for FX2NC-16EYR-T-DS and FX2NC-16EX-T-DS (interchangeable against optional spring terminal blocks)
- Adapter modules and system cabling sets available for units with ribbon cable connectors (transistor output types)


Specifications	FX2NC-16 EX-T-DS	FX2NC-16 EYR-T-DS	FX2NC-16 EX-DS	FX2NC-16 EYT-DS	FX2NC-32 EX-DS	FX2NC-32 EYT-DS
<b>Electrical data</b>						
Integrated inputs/outputs	16	16	16	16	32	32
Power supply	All modular extension units are supplied by the base unit.					
<b>Inputs</b>						
Integrated inputs	16	—	16	—	32	—
Input current X0→X7 / X10→∞	7/5	—	7/5	—	7/5	—
Min. current for logical 1 X0→X7 / X10→∞	mA 4.5/3.5	—	4.5/3.5	—	4.5/3.5	—
Max. current for logical 0	mA 1.5	—	1.5	—	1.5	—
Isolation	Photocoupler isolation between input terminals and PC power for all base units.					
Response time	For all base units of the MELSEC FX2NC series: 10 ms (at time of shipment), partly adjustable between 0 and 15 ms (REFF, FNCS1 = 0 – 60 ms)					
<b>Outputs</b>						
Integrated outputs	—	16	—	16	—	32
Output type	—	Relay	—	Transistor	—	Transistor
ON voltage (max.)	V	Generally for relay version: < 264 V AC, < 30 V DC; for transistor version: 5 – 30 V DC				
Max. output current	- per output A - per group* A	— 2	— 4/8	0.1/0.3 <sup>①</sup> 0.8	— —	0.1/0.3 <sup>①</sup> 0.8
Max. switching power	- inductive load VA - lamp load W	— 100	— —	2.4/7.2 <sup>②</sup> 0.3/0.9 <sup>③</sup>	— —	2.4/7.2 <sup>②</sup> 0.3/0.9 <sup>③</sup>
Response time	ms	— 10	— —	< 0.2	— —	< 0.2
Life of contacts (switching times)	—	Same as base unit	—	—	—	—
<b>Mechanical data</b>						
Connection type	Removable screw terminal blocks	Removable screw terminal blocks	Ribbon cable connector	Ribbon cable connector	Ribbon cable connector	Ribbon cable connector
Weight	kg 0.2	0.2	0.15	0.2	0.2	0.2
Dimensions (W x H x D)	mm 20.2 x 90 x 89	24.2 x 90 x 89	14.6 x 90 x 87	14.6 x 90 x 87	26.2 x 90 x 87	26.2 x 90 x 87
<b>Order information</b>	Art. no.	128152	128153	104503	104504	104505
① for Y0 and Y1 = 0.3 A; all others 0.1 A   ② 7.2 W for Y0 to Y3; all others 2.4 W   ③ 0.9 W for Y0 to Y3; all others 0.3 W						
* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.						

① for Y0 and Y1 = 0.3 A; all others 0.1 A   ② 7.2 W for Y0 to Y3; all others 2.4 W   ③ 0.9 W for Y0 to Y3; all others 0.3 W

\* This limitation applies only per reference terminal for each group. Please observe the terminal assignments for the group identification.

## ■ Extension Adapter Boards

FX1N  FX2N  FX2NC

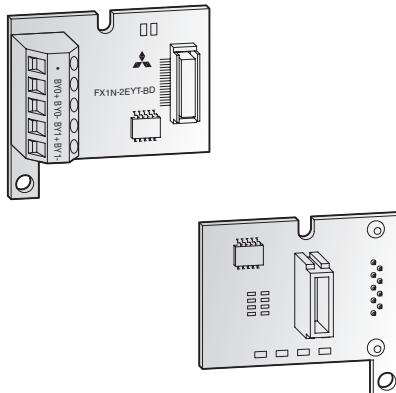

### Extension adapter FX1N

The extension adapters of the FX1N series are available with 4 inputs or 2 outputs. They are installed directly in the controller of the FX1S or FX1N series and therefore do not require any additional installation space.

These adapters are especially advantageous when only few additional I/Os are required and there is not enough room for an adjacent module to be installed.


### Special Features:

- Due to the installation directly in the controller no modifications on the installation site are required.
- Compatible with the MELSEC FX1S and FX1N series (from CPU version 2.00)
- No I/O points occupied
- Inputs and outputs are controlled via special relays
- I/O status is indicated via LEDs
- Common use with FX1N-5DM

Specifications	FX1N-4EX-BD	FX1N-2EYT-BD
<b>Electrical data</b>		
Integrated inputs/outputs	4	2
Power supply	Via base unit	Via base unit
<b>Inputs</b>		
Integrated inputs	4	—
Input voltage level	24 V DC (+20 % / -10 %) ~ 5 mA (24 V DC)	—
Min. current for logical 1	mA 3.5	—
Max. current for logical 0	mA 1.5	—
Response time	10 ms (factory adjusted)	—
<b>Outputs</b>		
Integrated outputs	—	2
Output type	—	Transistor
Max. switching voltage	V —	5 – 30 V DC
Max. output current - per output	A —	0.5
Max. output current - per group	A —	—
Max. switching power - inductive load	VA —	12 W / 24 V DC
Max. switching power - lamp load	W —	1.5 W / 24 V DC
Leackage current	mA —	0.1 / 30 V DC
Response time	ms —	0.2
<b>Mechanical data</b>		
Weight	kg 0.02	0.02
Dimensions (W x H x D)	mm 43 x 38.5 x 22	43 x 38.5 x 22
<b>Order information</b>	Art. no.	139418
		139420

## ■ Analog Setpoint Adapters FX1N-8AV-BD and FX2N-8AV-BD

FX1N  FX2N  FX2NC

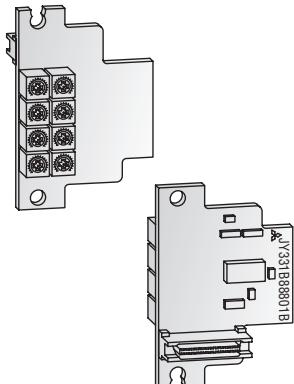

The FX□N-8AV-BD analog setpoint adapters enable the user to set 8 analog setpoint values. The analog values of the potentiometers are read into the controller and used as default setpoint values for timers, counters and data registers by the user's PLC programs.

Setpoint value polling and the definition of the potentiometer scales are performed in the PLC program using the dedicated instructions VRRD/VRSC (FNC85/86).


The FX□N-8AV-BD analog setpoint adapters are installed in the expansion slot of the FX1N/ FX2N CPU. No additional power supply is

Specifications	FX1N-8AV-BD	FX2N-8AV-BD
Applicable for	Base units FX1S/FX1N	Base units FX2N
General specifications	Conforms to FX1N/FX2N base units	
Power supply	From base unit	From base unit
Adjusting range	8 bit	8 bit
Related I/O points	0	0
Potentiometer evaluation	Via application instruction from the PLC CPU (FNC 85/86)	
Weight	kg	0.02
Dimensions (W x H x D)	mm	43 x 38.5 x 22

Order information	Art. no.	
	130744	65594

## ■ Analog Adapter Board FX1N-2AD-BD

FX1N  FX2N  FX2NC

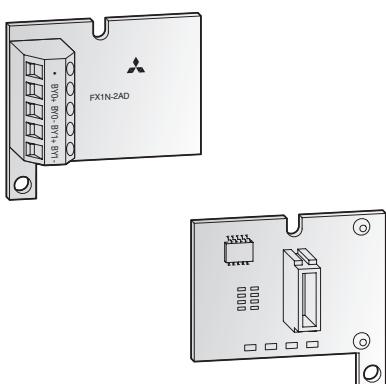


The analog input adapter board FX1N-2AD-BD provides the user with 2 analog inputs. The board converts analog process signals into digital values which are further processed by the MELSEC FX1N/FX2N controller (for CPU version 2.00).

The actual values or mean values over several measurements may be output. The adapter is inserted into the extension slot of the FX1S or FX1N CPU. An additional power supply is not required for operation.

Specifications	FX1N-2AD-BD	
General specifications	Conforms to FX1N/FX2N base units	
Power supply	From base unit	
Analog channels	Inputs	2
	Outputs	—
Analog input range	0 – +10 V DC / 4 – +20 mA	
Input resistance	Voltage input	kΩ
	Current input	Ω
Resolution	2.5 mV / 8 μA (11 bits + sign)	
Overall accuracy	±1%	
Conversion speed	Analog → Digital	1 program cycle
	Digital → Analog	ms
Related I/O points	—	
Weight	kg	0.02
Dimensions (W x H x D)	mm	43 x 38.5 x 22

Order information	Art. no.	
	139421	

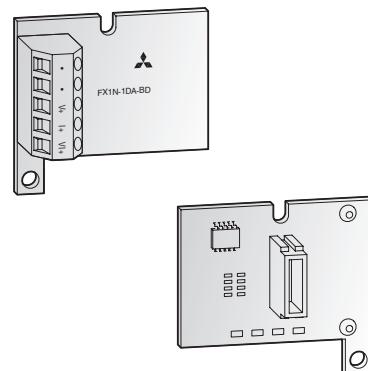

## ■ Analog Adapter Board FX1N-1DA-BD

FX1N  FX2N  FX2NC

The analog adapter FX1N-1DA-BD provides the user with 1 analog output. The module converts digital values from the FX1N/FX2N controller (from version 2.00) to the analog signals required by the process.

The analog adapter can output both current and voltage signals.

The adapter is inserted into the extension slot of the FX1S or FX1N CPU. An additional power supply is not required for operation.

Specifications		FX1N-1DA-BD	
General specifications		Conforms to FX1N/FX2N base units	
Power supply		From base unit	
Analogs channels	Inputs	—	
	Outputs	1	
Analog output range		0 – +10 V DC / 4 – +20 mA	
External load	Voltage output	2 kΩ – 1 MΩ	
	Current output	< 500 Ω	
Resolution		2.5 mV / 8 μA (11 bits + sign)	
Overall accuracy		±1%	
Conversion speed	Analog → Digital	ms	—
	Digital → Analog	ms	1 program cycle
Related I/O points		0	
Weight	kg	0.02	
Dimensions (W x H x D)	mm	43 x 38.5 x 22	

Order information	Art. no.
	139422


## ■ Analog Input/Output Modules FX1N-3A and FX2N-5A

FX1N  FX2N  FX2NC

The analog input/output modules are available in two different models. They provide the user with 2 or 4 analog inputs and 1 analog output. They serve for conversion of analog process signals into digital values, and vice versa.

For the analog inputs can be selected between current or tension input signals.

The analog input/output module is connected to the base unit via a protected flat cable. The connection is to the extension bus on the right side of the controller. For the connection to a FX2NC series base unit the adapter FX2NC-CNV-IF is additional needed.

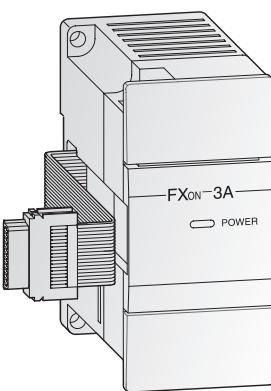


Technische Daten		FX1N-3A	FX2N-5A
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		24 V DC / 90 mA (from base unit), 5 V DC / 30 mA	24 V DC / 90 mA (from base unit), 5 V DC / 70 mA
Number of analog points	Inputs	2	4
	Outputs	1	1
Analog data	Voltage	DC	0 – +10 V, 0 – +5 V
	Current	DC	4 – +20 mA
I/O resolution	Analog inputs	40 mV / 64 μA (8 bit)	50/312,5 μA / 1,25/10 μA
	Analog outputs	40 mV / 64 μA (8 bit)	5 mV (12 Bit) / 10 μA (10 bit)
Total accuracy		±1%	±0,3 – 1 %*
Conversion time	Analog → digital	0.1 ms / channel	1 ms / channel
	Digital → analog	0.1 ms	2 ms
Related I/O points		8	8
Weight	kg	0.2	0.3
Dimensions (W x H x D)	mm	43 x 90 x 87	55 x 90 x 87

Order information	Art. no.
	41790

\*Dependent on the ambient temperature

## ■ Analog Output Module FX2N-2DA

FX1N  FX2N  FX2NC

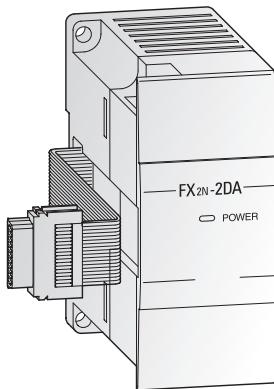


The analog output module FX2N-2DA provides the user with 2 analog outputs. The modules convert digital values from the FX1N/FX2N/FX2NC controller to the analog signals required by the process.

The module can output both current and voltage signals.

Specifications		FX2N-2DA	
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 30 mA (from base unit), 24 V DC / 85 mA	
Analog channels	Inputs	—	
	Outputs	2	
Analog output range		0 – +10 V DC / 0 – +5 V DC / 4 – +20 mA	
External load	Voltage output	2 kΩ – 1 MΩ	
	Current output	< 500 Ω	
Resolution		2.5 mV / 4 μA (11 bit + sign)	
Overall accuracy		±1 %	
Conversion speed	Analog → Digital	ms	—
	Digital → Analog	ms	4 per channel
Related I/O points		8	
Weight	kg	0.2	
Dimensions (W x H x D)	mm	43 x 90 x 87	
<b>Order information</b>		Art. no.	102868

## ■ Analog Input Module FX2N-2AD

FX1N  FX2N  FX2NC

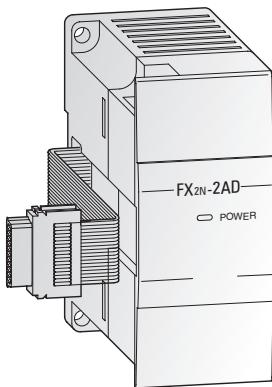


The analog input module FX2N-2AD provides the user with 2 analog inputs. The module converts analog process signals into digital values which are further processed by the MELSEC FX1N/FX2N/FX2NC controller.

The actual values or mean values over several measurements may be output.

Specifications		FX2N-2AD	
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 20 mA (from base unit), 24 V DC / 50 mA	
Analog channels	Inputs	2	
	Outputs	—	
Analog input range		0 – +10 V DC / 0 – +5 V DC / 4 – +20 mA	
Input resistance	Voltage input	kΩ	200
	Current input	Ω	250
Resolution		5 mV / 20 μA (11 bit + sign)	
Overall accuracy		±1 %	
Conversion speed	Analog → Digital	ms	2.5 per channel
	Digital → Analog	ms	—
Related I/O points		8	
Weight	kg	0.2	
Dimensions (W x H x D)	mm	43 x 90 x 87	
<b>Order information</b>		Art. no.	102869

## ■ Analog Output Module FX2N-4DA and FX2NC-4DA

FX1N  FX2N  FX2NC

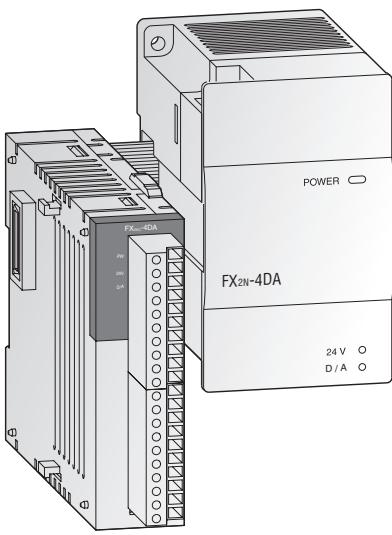

The analog output modules FX2N-4DA and FX2NC-4DA provide the user with 4 analog outputs. The modules convert digital values from the FX1N/FX2N/FX2NC controller into analog signals required by the process.

The modules can output both current and voltage signals.


Specifications		FX2N-4DA	FX2NC-4DA
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 30 mA (from base unit), 24 V DC / 200 mA	5 V DC / 30 mA (from base unit), 24 V DC / 130 mA
Analog channels	Inputs	—	—
	Outputs	4	4
Analog output range		-10 – +10 V DC / 0 – +20 mA / 4 – +20 mA	
External load	Voltage output	2 kΩ – 1 MΩ	2 kΩ – 1 MΩ
	Current output	< 500 Ω	< 500 Ω
Resolution		5 mV / 20 μA (11 bit + sign)	5 mV / 20 μA (11 bit + sign)
Overall accuracy		±1%	±0,3 – 1 %*
Conversion speed	Analog → Digital	ms	—
	Digital → Analog	ms	2.1 for 4 channels
Related I/O points		8	8
Weight	kg	0.3	0.13
Dimensions (W x H x D)	mm	55 x 90 x 87	20 x 90 x 74

Order information	Art. no.	65586	151234
-------------------	----------	-------	--------

\*Dependent on the ambient temperature

## ■ Analog Input Module FX2N-4AD and FX2NC-4AD

FX1N  FX2N  FX2NC

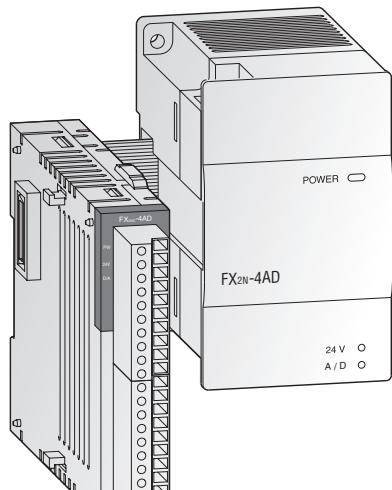

The analog input modules FX2N-4AD and FX2NC-4AD provide the user with 4 analog inputs. The modules convert analog process signals into digital values which are further processed by the FX1N/FX2N/FX2NC controller.

The actual values or mean values over several measurements may be output.


Specifications		FX2N-4AD	FX2NC-4AD
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 30 mA (from base unit), 24 V DC / 50 mA	5 V DC / 30 mA (from base unit), 24 V DC / 130 mA
Analog channels	Inputs	4	4
	Outputs	—	—
Analog input range		-10 – +10 V DC / -20 – +20 mA / 4 – +20 mA	
Input resistance	Voltage input	kΩ	200
	Current input	Ω	250
Analog data	Voltage	V	±10
	Current	mA	±20
Resolution		5 mV / 20 μA (11 bit + sign)	0,32 mV / 2,5 mV (15 bit+sign) 1,25 μA / 5,0 μA (14 bit+sign)
Overall accuracy		±1%	±0,3 – 1 %*
Conversion speed	Analog → Digital	ms	15 per channel / 6 per channel (high speed)
	Digital → Analog	ms	—
Related I/O points		8	8
Weight	kg	0.3	0.13
Dimensions (W x H x D)	mm	55 x 90 x 87	20 x 90 x 74

Order information	Art. no.	65585	151233
-------------------	----------	-------	--------

\*Dependent on the ambient temperature

## ■ Analog Input Module FX2N-8AD

FX1N  FX2N  FX2NC

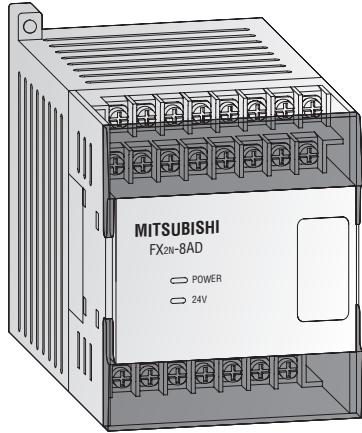


The high-resolution FX2N-8AD analog input module converts 8 points of analog input values into digital values, and transfers them to the PLC base unit.

Analog inputs can be selected from the voltage input, the current input and the thermocouple input (temperature input) by the input mode setting by the TO instruction given by the PLC base unit and the connection method.

Specifications		FX2N-8AD	
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 50 mA (from base unit), 24 V DC / 80 mA	
Analogs channels	Inputs	8	
	Outputs	—	
Analog input range	Voltage input	kΩ	-10 – +10 V DC / -20 – +20 mA / 4 – +20 mA
Input resistance	Current input	Ω	200 250
Resolution			0.63 – 2.5 mV / 2.0 – 5.0 μA (16 bit)
Overall accuracy			±1 %
Conversion speed	Analog → Digital Digital → Analog	ms	500 μs per channel / 40 ms with thermo element —
Integrated memory			EEPROM
Related I/O points			8
Weight		kg	0.3
Dimensions (W x H x D)		mm	75 x 105 x 75
Order information		Art. no.	129195

## ■ Analog Input Module for Thermocouples FX2N-4AD-TC

FX1N  FX2N  FX2NC

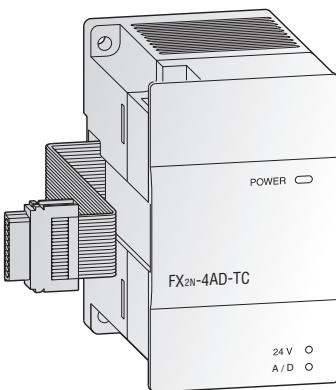

The analog input module for thermocouples FX2N-4AD-TCC is used for processing temperatures. It has 4 independent inputs for detecting signals from thermocouples of types J and K. The type of thermocouple can be chosen independently for each point.

The electrical magnitude at an input is converted into a digital numerical value with a sign. The converted value is stored by the PLC in a memory address, so-called


buffer memory, in the module and then converted. It is also possible to calculate a mean value from a predetermined number of measurements in order to obtain stable digital results.

The number of measurements must be transferred by the PLC program to a buffer memory of the special function module. The value determined is available in another memory address.

Specifications		FX2N-4AD-TC	
General specifications		Conforms to FX1N/FX2N/FX2NC base units	
Power supply		5 V DC / 30 mA (from base unit), 24 V DC / 50 mA	
Analog inputs		4 (J or KJ type)	
Compensated temperature range	°C	-100 – +600 (J type) / -100 – +1200 (K type)	
Digital output		-1000 – +6000 (J type) / -1000 – +12000 (K type)	
Resolution	°C	0.3 (J type) / 0.4 (K type)	
Overall accuracy		±0.5 %	
Conversion speed	ms	240 per channel (±2 %)	
Related I/O points		8	
Weight	kg	0.3	
Dimensions (W x H x D)	mm	55 x 90 x 87	
Order information		Art. no.	65588

### ■ Analog Input Module for Pt100 Inputs FX2N-4AD-PT

FX1N  FX2N  FX2NC

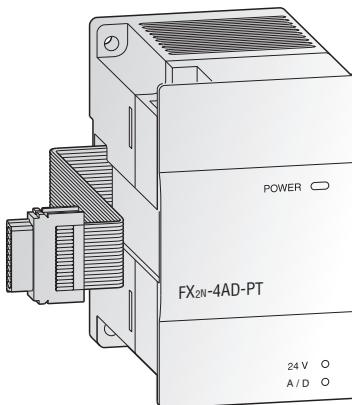

The analog input module for Pt100 inputs FX2N-4AD-PT permits the connection of four Pt100 sensors to the FX1N/FX2N/FX2NC series controller.

The respective temperatures can be read out either in °C or °F.

#### Specifications

#### FX2N-4AD-PT


General specifications	Conforms to FX1N/FX2N/FX2NC base units
Power supply	5 V DC / 30 mA (from base unit), 24 V DC / 50 mA
Analog inputs	4 (Pt100 sensors)
Compensated temperature range	°C -100 – +600
Digital output	-1,000 – 6,000 (12 bit conversion)
Resolution	°C 0.2
Overall accuracy	±1 % over full linear range
Conversion speed	ms 15 for 4 channels
Related I/O points	8
Weight	kg 0.3
Dimensions (W x H x D)	mm 55 x 90 x 87

#### Order information

Art. no. 65587

FX1N  FX2N  FX2NC

### ■ Temperature Control Module FX2N-2LC

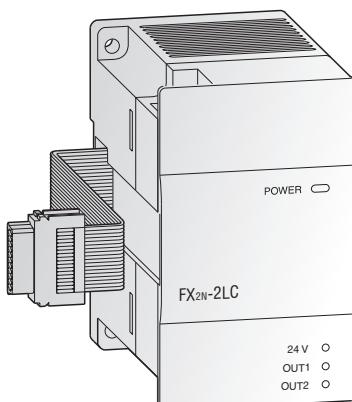

The temperature control module FX2N-2LC is equipped with two temperature input points and two transistor (open collector) output points. It is used to read temperature signals from thermocouples and platinum resistance thermometer bulbs, and performs PID output control.

Data can be written and read using FROM/TO instructions. It is not necessary to create a special sequence program for PID operation, since the FX2N-2LC performs arithmetic operation for PID control and output control by itself.

The proportional band, the integral time and the derivative time can be easily set by the integrated autotuning function.

#### Specifications

#### FX2N-2LC


General specifications	Conforms to FX1N/FX2N/FX2NC base units
Power supply	5 V DC / 70 mA (from base unit) 24 V DC / 55 mA
Number of input points	2 points
Number of output points	2 transistor output points
Temperature control method	Two-position control, PID control (with autotuning), PI control
Sampling period	0.5 s / channel
Set temperature range	Equivalent to the input range of the thermocouple used
Supported thermocouples	Pt100, JPt100, K, J, R, S, E, T, B, N, PLII, WRe5=26, U, L
Measurement precision	±0.7 % (±0.3 % when ambient temperature is 23 °C ±5 °C)
Resolution	0.1 °C or 1 °C
Related I/O points	8
Weight	kg 0.25
Dimensions (W x H x D)	mm 55 x 90 x 87

#### Order information

Art. no. 129196

## ■ High-Speed Counter FX2N-1HC

FX1N  FX2N  FX2NC

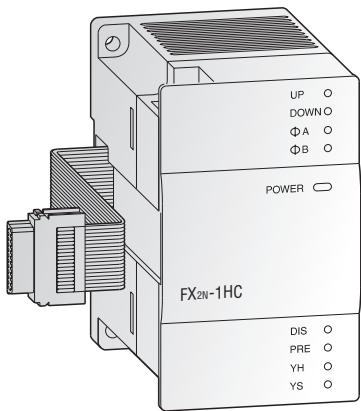

In addition to the internal high-speed MELSEC FX counters, the high-speed counter module FX2N-1HC provides the user with an external hardware counter. It counts 1- or 2-phase pulses up to a frequency of 50 kHz. The counting range covers either 16 or 32 bit.

The two integrated transistor outputs can be switched independently of one another by means of internal comparison functions. Hence, simple positioning tasks can also be realized economically. In addition, the FX2N-1HC can be used as a ring counter.

### Specifications

### FX2N-1HC


General specifications	Conforms to FX1N/FX2N/FX2NC base units	
Signal level	5, 12, 24 V DC / 7 mA	
Power supply	5 V DC / 90 mA (from base unit)	
Counter inputs	2 (1 phase) or 1 (2 phase)	
Max. counting frequency	kHz	50
Input format	bit	16, 32
Type of counter		Up/down counter, ring counter
Counting range	16 bit	-2147483648 – +2147483647
	32 bit	0 – 65535
Output type		2 x transistor (5 – 24 V DC; 0.5 A)
Related I/O points		8
Weight	kg	0.3
Dimensions (W x H x D)	mm	55 x 90 x 87

### Order information

Art. no. 65584

FX1N  FX2N  FX2NC

## ■ Single-Axis Positioning Modules FX2N-1PG-E and FX2N-10PG

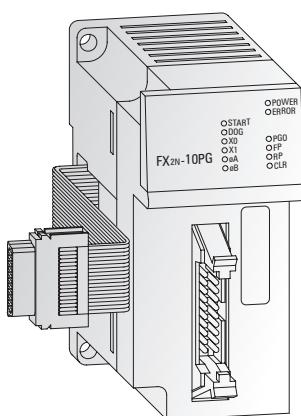

The positioning modules FX2N-1PG-E and FX2N-10PG are extremely efficient single-axis positioning modules for controlling either step drives or servo drives (by external regulator) with a pulse chain. It is very suitable for achieving accurate positioning in combination with the MELSEC FX series. The configuration and allocation of the position data are carried out directly via the PLC program.

A very wide range of manual and automatic functions are available to the user.

Further special features are:

- Possibility of absolute or relative positioning
- 7 different operation functions, such as jog mode, zeroing, variable speeds, etc.
- Separate programming units and operator panels are not required.
- The speed increase or decrease can be set either automatically or manually.

### Specifications


### FX2N-1PG-E      FX2N-10PG

General specifications	Conforms to FX1N/FX2N/FX2NC base units	
Signal level for digital inputs	24 V DC / 7–40 mA	24 V DC / 6–20 mA
Power supply	5 – 24 V DC / 60 mA	5 – 24 V DC / 70 mA
Accessible axes	1	1
Output frequency	pulse/s	10 – 100 000
Related I/O points		1 – 1 000 000
Weight	kg	0.3
Dimensions (W x H x D)	mm	43 x 90 x 87

### Order information

Art. no. 65583

140113

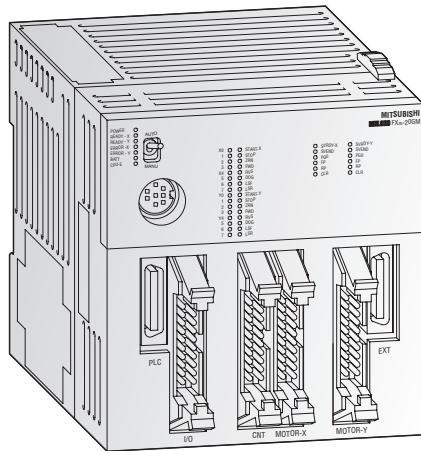

## ■ Positioning Modules FX2N-10GM and FX2N-20GM

FX1N  FX2N  FX2NC

### 1-axis or 2-axes positioning modules

The FX2N-10GM and FX2N-20GM positioning modules are pulse chain output units that enable the positioning control of stepping motors or servo motors via the drive unit.

The comfortable programming software allows even newcomers to realize complicated positioning tasks in an easy way.

Travel units, handling devices and processing lines with fixed or variable strokes are supported by simple programs for different positioning applications.

### Special Features:


- Can be used as a stand-alone device or in combination with an FX2N or FX2NC PLC
- Up to 8 FX2N-10GM and/or FX2N-20GM can be connected to an FX2N PLC and up to four modules to an FX2NC PLC
- Pulse generator connection possible
- Data communication with the PLC via simple FROM/TO instructions
- Linear and circular interpolation are available
- Integrated inputs and outputs (connection possible with external terminal block)
- Additional inputs/outputs can be added
- Easy to use programming software (art. no. 128776)

Specifications		FX2N-10GM	FX2N-20GM
Number of controllable axes		1 axis	2 axes (independently or simultaneously)
Program memory		3.8 K steps with EEPROM	7.8 K steps with built-in RAM (battery backup): EEPROM optionally
Positioning	method	Absolute data or incremental	Absolute data or incremental
	units	mm, inch, degree and pulse	mm, inch, degree and pulse
	counting resolution	31 bits + sign, -2147483648 to 2147483647	31 bits + sign, -2147483648 to 2147483647
	max. counting frequency	200 kHz	200 kHz
	speed	1,530,000 mm/min.	1,530,000 mm/min.
Zero return		Manual operation or automatic operation	Manual operation or automatic operation
Absolute position detection		The detection is possible with MELSERVO MR-J2 and MR-C	
Control inputs	operation system	FWD - manual forwarding, RVS - manual reversal, ZRN - machine zero return, START - automatic start, STOP - stop positioning, manual pulse generator (2 kHz max.), single-step operation input (depends upon the parameter setting)	
	mechanical system	DOG - near point signal, LSF - forward rotation limit, LSR - reverse rotation limit, interrupt signal (4 points)	
	servo system	SVRDY - servo ready, SVEND - servo end, PG0 - zero-point signal	
	general purpose	Digital inputs X0 to X3	
Control outputs	servo system	FP - forward rotation pulse, RP - reverse rotation pulse, CLR - counter clear	
	general purpose	Digital outputs Y0 to Y5	
Self-diagnosis		"Parameter error", "program error" and "external error" can be diagnosed by the display and the error codes	
Power supply		24 V DC (-15 % to +10 %)	24 V DC (-15 % to +10 %)
Power consumption		5 W	10 W
General specifications		Conforms to FX2N/FX2NC base units	Conforms to FX2N/FX2NC base units
Weight	kg	0.3 kg	0.4 kg
Dimensions (W x D x H)	mm	60 x 90 x 74	86 x 90 x 74
Order information	Art. no.	128889	127016

Accessories	Terminal blocks and connection cables for system cabling (see page 75) Cable to connect servo amplifier MR-C: E-GMC-200CAB, art. no.: 128731, Cable to connect servo amplifier MR-J2: E-GMJ2-200CAB1A, art. no.: 125583, Cable to connect servo amplifier general-purpose drive unit: E-GM-200CAB, art. no.: 130450, Programming software: FX-PCS-VPS/WIN-E, art. no.: 128776 Spare battery (FX2N-20GM only): FX2NC-32BL, art. no.: 128725
-------------	---

## ■ Active Data Interface Module FXON-232ADP and FX2NC-232ADP

FX1N  FX2N  FX2NC

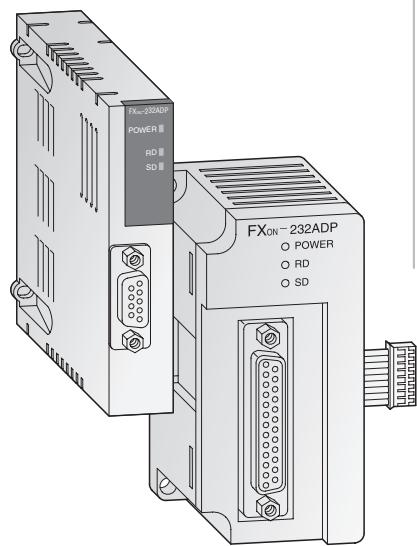

The additional active data interface modules FXON-232ADP and FX2NC-232ADP permit active communication between the PLC and surrounding RS232C peripherals. All devices can be sent or received via these interfaces.

A program transfer or the connection to a MAC terminal is not possible.


The module is suitable for the connection of printers, bar code readers, PCs and other PLC systems. The communication is handled by the PLC program using the RS instruction.

The connection is to the communications bus on the left side of the controller. The internal serial RS422 interface is also fully available.

Specifications	FXON-232ADP	FX2NC-232ADP
General specifications	Conforms to FX1S/FX1N/FX2N/FX2NC base units	
Interface	RS232C with 25 pole D-SUB compact plug (photocoupler isolation)	
Power supply	5 V DC / 200 mA (from base unit)	5 V DC / 100 mA (from base unit)
Communication speed	bit/s	300 – 19200
Communication distance	m	Max. 15
Communication cable		Shielded cable
Communication mode		Half duplex
Protocols		Half duplex (FX1S/FX1N) / Full Duplex (FX2N/FX2NC)
Format		Non-protocol mode / free programmable via PLC
Related I/O points		7 or 8 bits, parity 1 or 0, 1 or 2 stop bit
Weight	kg	0
Dimensions (W x H x D)	mm	43 x 90 x 68
<b>Order information</b>		Art. no. 42211 149110

## ■ Interface Module FX2N-232IF

FX1N  FX2N  FX2NC

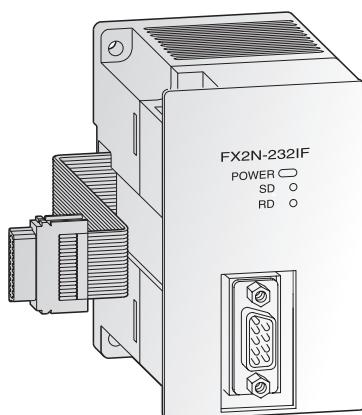

The interface module FX2N-232IF module provides an RS232C interface for serial data communications with the MELSEC FX1N and FX2N.


Communication with PCs, printers, modems, barcode readers etc. is handled

by the PLC program using FROM/TO instructions.

The send and receive data are stored in the FX2N-232IF's own buffer memory.


Changes at the user program are not possible via this interface module.

Specifications	FX2N-232IF
General specifications	Conforms to FX1S/FX1N/FX2N/FX2NC base units
Interface	RS232C with 9 pole D-SUB connector (photocoupler isolation)
Power supply	5 V DC / 40 mA (from base unit), 24 V DC / 80 mA
Communication speed	Bit/s 300, 600, 1200, 2400, 4800, 9600, 19200
Communication distance	m Max. 15
Communication cable	Shielded cable
Communication mode	Full duplex
Protocols	Non protocol mode / start stop synchronisation
Send and receive buffer	512 byte each
Format	7 or 8 data bits, parity 1 or 0, 1 or 2 stop bit
Related I/O points	8
Weight	kg 0.3
Dimensions (W x H x D)	mm 55 x 90 x 85
<b>Order information</b>	
	Art. no. 66640



## ■ Interface Adapters FX1N-232BD and FX2N-232BD

FX1N  FX2N  FX2NC

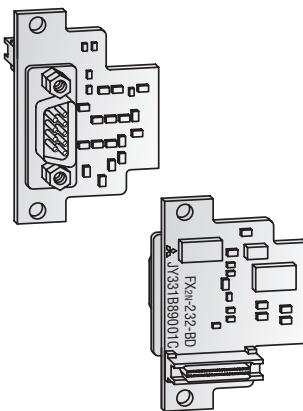

The FX□N-232BD interface adapters provide an RS232C interface for serial data communications with the MELSEC FX1N/FX2N.

Data and programmes can be transferred with the standard RS232 protocol. The unit's integrated automatic parameter setting facility also makes it possible to configure a modem – for example for remote programming and maintenance tasks.

Data can be transferred directly to other serial peripherals using the RS dedicated instruction. Connected programming systems are identified automatically.


The adapter board is installed in the expansion slot provided for it in the FX1N / FX2N base unit.

If the interface adapter is used no other adapters can be used.

Specifications	FX1N-232BD	FX2N-232BD
Applicable for	Base units FX1S/FX1N	Base units FX2N
General specifications	Conforms to FX1N/FX2N base units	
Interface	RS232C with 9 pole D-SUB connector	
Power supply	5 V DC / 60 mA (from base unit)	
Communication speed	Bit/s	300, 600, 1200, 2400, 4800, 9600, 19200
Communication distance	m	Max. 15
Communication mode		Half duplex
Protocols		Free programmable via PLC / non-protocol mode / protocol 1 or 4
Related I/O points		—
Weight	kg	0.02
Dimensions (W x H x D)	mm	43 x 38,5 x 22
<b>Order information</b>	Art. no.	130743
		65596

## ■ Interface Adapters FX1N-422BD and FX2N-422BD

FX1N  FX2N  FX2NC

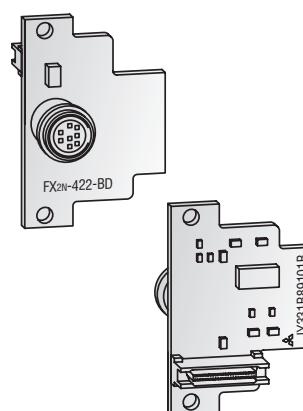

The FX□N-422BD interface adapters provide a second RS422 interface for connection of an additional device to the controller (programming unit or operator terminal).

In addition to programming the PLC the main applications for this interface include production data logging, process visualisation and man-machine communication.

If one programming unit is already connected to the integrated RS422 interface it is not possible to connect a second one to the FX2N-422BD interface adapter. It is possible to connect two control units, however.

The interface adapter is installed in the expansion slot provided for it in the FX1N/FX2N base unit.

No additional adapter boards can be used when this interface adapter is installed.

Specifications	FX1N-422BD	FX2N-422BD
Applicable for	Base units FX1S/FX1N	Base units FX2N
General specifications	Conforms to FX1N/FX2N base units	
Interface	RS422 with 8 pole mini DIN connector	
Power supply	5 V DC / 60 mA (from base unit)	
Communication distance	m	Max. 15
Communication mode		Half duplex
Protocols		Free programmable via PLC
Related I/O points		—
Weight	kg	0.01
Dimensions (W x H x D)	mm	43 x 38,5 x 20
<b>Order information</b>	Art. no.	130741
		65595

## ETHERNET

### Overview

ETHERNET is the most widespread network for connection of information processors such as personal computers and work stations. By loading an ETHERNET interface into the PLC, production-related management information can be transmitted rapidly to personal computers or work stations.

ETHERNET is a platform for a very wide range of data communications protocols. The combination of ETHERNET and the extremely widespread TCP/IP protocol enables high-speed data communications between process supervision systems and the MELSEC PLC series.

### Structure

Up to 5 ETHERNET segments can be linked to one another per repeater. There are three standard network types : "Yellow" cable using the 10BASE5 interface, "Cheapernet" cable (Thin Ethernet) using the 10BASE2 interface and 10/100BASE-T for using with twisted pair cable.


Bus segments using Yellow cable can be up to 500 m long. Cheapernet configurations support bus segment cable lengths of up to 185 m.

### Data exchange

TCP/IP provides logical point-to-point links between two ETHERNET stations. Using the TCP/IP protocol a process supervision system can request 256 data words per query, 480 words if a QnAS compatible ETHERNET card is used and 960 if the System Q module is used. The speed of the response to the query varies depending on the type of CPU used and the ETHERNET module.

### FTP server functionality

The MELSEC PLC compatible ETHERNET modules also provide FTP server functionality, in addition to the normal TCP/IP communications services. This means that a personal computer running standard communications software can read from and write to the PLC CPU sequence program via the Internet.

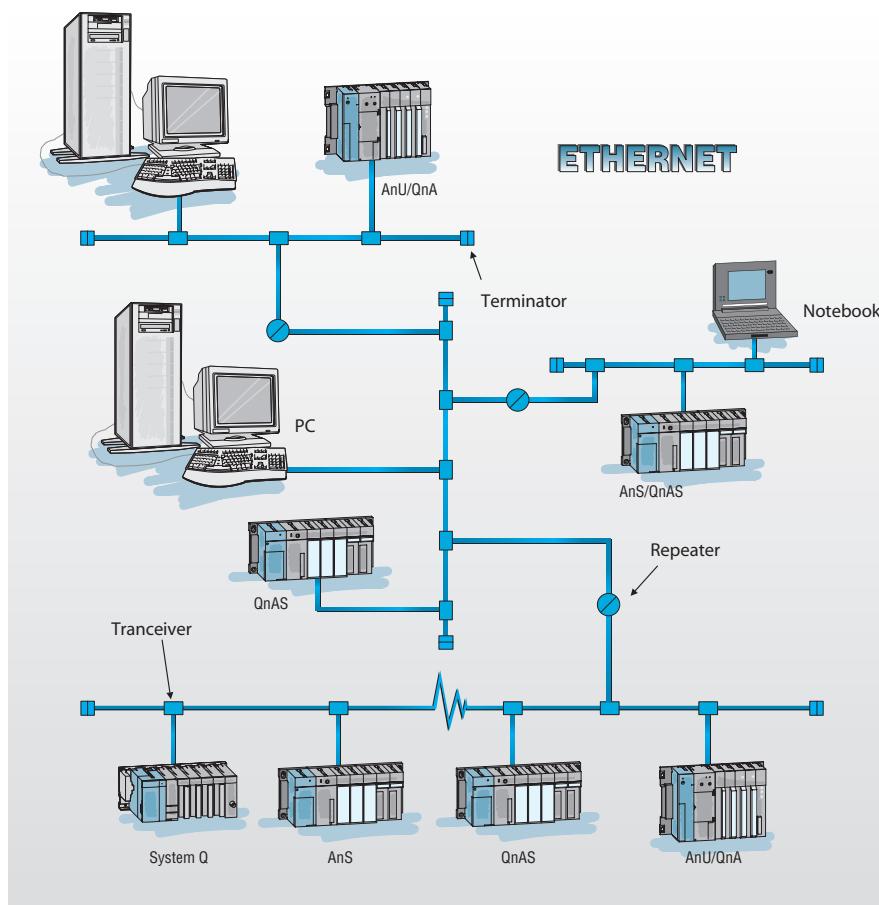

### Administration


The programming software GX IEC Developer or GX Developer providing function blocks or setup routines for the PLCs, makes the configuration of one or more TCP/IP links a quick and easy process.

Cable and logic diagnostics are also simple because all MELSEC ETHERNET cards support the PING instruction.

Specifications	Yellow Cable	Thin Ethernet	Twisted Pair
Cable type	10BASE5	10BASE2	10BASE-T      100BASE-TX
Max. distance between 2 stations	2500 m	925 m	depends on configuration
Min. distance between 2 stations	2.5 m	0.5 m	—      —
Max. segment length	500 m	185 m	100 m      100 m
Max. permitted no. of repeaters	4	4	—      —
Max. stations per segment	100	30	1024 (12 per hub)      1024 (12 per hub)
Connector type	AUI	BNC	RJ45      RJ45

## Ethernet Communications Module COM-ET10-T

FX1N  FX2N  FX2NC

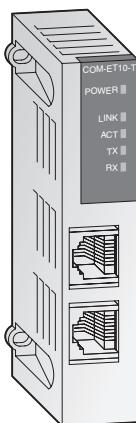

The COM-ET10-T communications module is a serial-to-Ethernet converter and enables connection of FX family PLCs to Ethernet networks. It is installed on the left side of the controller with an adapter module (FX1N-CNV-BD, FX2N-CNV-BD or FX2NC-CNV-IF).

With a the COM-ET10-T installed the PLC can exchange data quickly and easily with

process visualisation systems, and it is also possible to perform diagnostics and programming from any location in the network. The module provides upload, download and debugging functionality via the Ethernet for the entire MELSEC FX family.

Specifications	COM-ET10-T
General specifications	Conforms to FX1S/FX1N/FX2N/FX2NC base units
Power supply (5 V DC)	Max. 100 mA (from base unit)
Interface	10BaseT
Connector	RJ45
Max. transfer rate	10 Mbit/s
Max. segment length	m
Related I/O points	—
Weight	kg
Dimensions (W x H x D)	mm
<b>Order information</b>	
Art. no. 144679	

## The PROFIBUS/DP Network

### Features

The open PROFIBUS/DP network enables extremely fast data exchange with a very wide variety of slave devices, including:

- Remote digital I/Os
- Remote analog I/Os
- Remote intelligence PLC (FX1N, FX2N)
- Frequency inverters (FR-A 540(L-G), FR-E 500 and FR-F500)
- Operator terminals (MAC E)
- A range of other devices from third-party manufacturers

### Structure

The maximum coverage of a bus segment is 1,200 m (at a maximum of 93.75 kbit/s). Up to 3 repeaters are allowed. Thus the maximum distance between 2 stations is calculated with 4,800 m.

### Cable Types

To help reduce costs PROFIBUS/DP uses RS485 technology with simple twisted-pair cabling.

Suitable cables include the UNITRONIC BUSLD from Lappkabel and the DUE 4451 from Alcatel.

### Data Exchange


The PROFIBUS/DP master modules FX2N-64DP-M, A(1S)J71PB92D and QJ71PB92D support slave device data exchange with up to 244 send bytes and 244 receive bytes. This means you can exchange a total of up to 488 bytes with a slave unit per network cycle.

### Administration

In combination with the GX Configurator DP configuration software the PROFIBUS/DP masters A1SJ71PB92D or QJ71PB92D give you user-friendly plug-and-play technology. The configuration software GX Configurator DP is self-explanatory, using a graphical model for setting up the network. You simply select the slave unit (e.g. FX2N), assign the station numbers and specify where the information is stored in the master CPU.

Please refer to page 101 for further information about the software.

Of course, PROFIBUS/DP slaves from MITSUBISHI ELECTRIC can also be connected to master devices from other manufacturers.

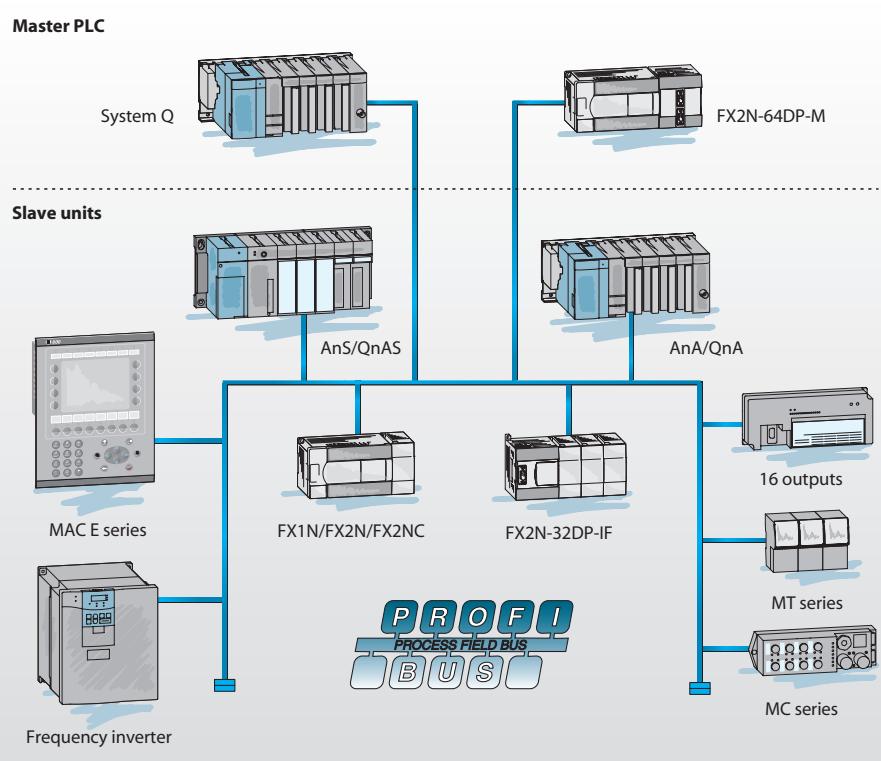


Specifications	Master FX2N-64DP-M	Master A1SJ71PB92D	Master QJ71PB92D																										
Application range	MELSEC FX2N/FX2NC	MELSEC AnS/QnAS	System Q																										
Communications protocol	EN 50170 / DIN 19245-T3																												
Cabling	Shielded twisted-pair with 24 AWG = 0.22 mm <sup>2</sup> , impedance: 100 – 130 Ω; Shielded twisted-pair with 22 AWG = 0.34 mm <sup>2</sup> , impedance: 135 – 165 Ω																												
Interface	RS485																												
Communications speed	<table border="1"> <tr> <td>distance</td> <td></td> </tr> <tr> <td>1.200</td> <td>kbit/s</td> </tr> <tr> <td>1.000</td> <td>kbit/s</td> </tr> <tr> <td>400</td> <td>kbit/s</td> </tr> <tr> <td>200</td> <td>kbit/s</td> </tr> <tr> <td>100</td> <td>kbit/s</td> </tr> </table>	distance		1.200	kbit/s	1.000	kbit/s	400	kbit/s	200	kbit/s	100	kbit/s	<table border="1"> <tr> <td>9,6 / 19,2 / 93,75</td> <td></td> </tr> <tr> <td>187,5</td> <td></td> </tr> <tr> <td>500</td> <td></td> </tr> <tr> <td>1.500</td> <td></td> </tr> <tr> <td>12.000</td> <td></td> </tr> </table>	9,6 / 19,2 / 93,75		187,5		500		1.500		12.000		<table border="1"> <tr> <td>12.000 / 6.000 / 3.000</td> <td></td> </tr> <tr> <td>12.000 / 6.000 / 3.000</td> <td></td> </tr> </table>	12.000 / 6.000 / 3.000		12.000 / 6.000 / 3.000	
distance																													
1.200	kbit/s																												
1.000	kbit/s																												
400	kbit/s																												
200	kbit/s																												
100	kbit/s																												
9,6 / 19,2 / 93,75																													
187,5																													
500																													
1.500																													
12.000																													
12.000 / 6.000 / 3.000																													
12.000 / 6.000 / 3.000																													
Max total distance	m	4.800 (3 repeaters)	4.800 (3 repeaters)																										
Slave units per master		60	60																										
Stations per segment		32	32																										
Repeaters per network		Max. 3	Max. 3																										
Order information	Art. no.	on request	63393																										
Accessories		PROFIBUS connector up to 12 Mbaud: PROFICON-PLUS, art. no. 140008 or PROFICON-PLUS-PG, art. no. 140009																											

Please refer to the Technical Catalogue Networks for further informations about master, slave and remote modules.

### ■ PROFIBUS Master Module FX2N-64DP-M

FX1N  FX2N  FX2NC

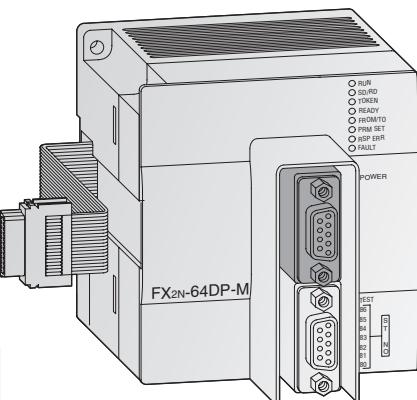

The PROFIBUS/DP master module FX2N-64DP-M enables communication between PLCs of the MELSEC FX family and other Profibus devices.

The FX2N-64DP-M can control up to 60 slave units. In Extended Service mode it can process up to 244 input bytes and 244 output bytes.

Setup and parameter adjustment are performed with the user-friendly


GX Configurator DP configuration software package. The FX2N-64DP-M supports Sync global control, Unsync global control, Freeze global control and Unfreeze global control.

PROFIBUS parameters such as cycle periods and I/O data can be set and displayed directly using the programming software or the FX-20 PE hand-held programming unit.

Specifications		FX2N-64DP-M
Module type		Master
General specifications		Conforms to FX1N/FX2N/FX2NC base units
Power supply		5 V DC / max. 30 mA (from base unit), 24 V DC / 250 mA
Communications protocol		EN50170, DIN19245T3
Interface		PROFIBUS/DP (with 9 pole D-SUB)
Communications speed		PROFIBUS standard (see table on page 53)
Profibus specifications		PROFIBUS standard (see table on page 53)
Max. number of nodes		32, 62 (1 repeater), 92 (2 repeater), 126 (3 repeater)
Communications distance	m	Max. 1,200 (depends on communication speed)
Related I/O points		8
Weight	kg	0.4
Dimensions (W x H x D)	mm	85 x 90 x 87
Order information		Art. no. on request
Accessories		Configuration software: GX Configurator DP (Vers. 4.0), Art. no. 136578; PROFIBUS connector up to 12 Mbaud: PROFICON-PLUS, art. no. 140008 or PROFICON-PLUS-PG, art. no. 140009

### ■ PROFIBUS/DP Slave Module FXON-32NT-DP

FX1N  FX2N  FX2NC

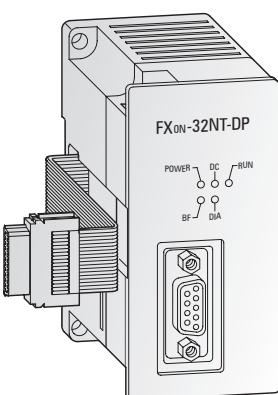

The FXON-32NT-DP PROFIBUS/DP slave module enables you to integrate a MELSEC FX1N/FX2N/FX2NC in an existing PROFIBUS/DP network.

This interface module provides your FX1N, FX2N or FX2NC CPU with an intelligent


PROFIBUS/DP link for the implementation of decentralised control tasks.

It links the system to the master PLC in the PROFIBUS/DP network for efficient and trouble-free data exchange.

Specifications		FXON-32NT-DP
Module type		Slave
General specifications		Conforms to FX1N/FX2N/FX2NC base units
Power supply		5 V DC / max. 170 mA (from base unit), 24 V DC / 60 mA
Interface		PROFIBUS/DP (with 9 pole D-SUB connector)
Communications speed		PROFIBUS standard (see table on page 53)
Profibus specifications		PROFIBUS standard (see table on page 53)
Communications distance	m	Max. 1,200 (depends on communication speed)
Communication cable		PROFIBUS cable with 9-pin D-SUB connector
Related I/O points		8
Weight	kg	0.3
Dimensions (W x H x D)	mm	43 x 90 x 87
Order information		Art. no. 62125
Accessories		PROFIBUS connector up to 12 Mbaud: PROFICON-PLUS, art. no. 140008 or PROFICON-PLUS-PG, art. no. 140009

## ■ Remote I/O Station FX2N-32DP-IF for PROFIBUS/DP

FX1N  FX2N  FX2NC

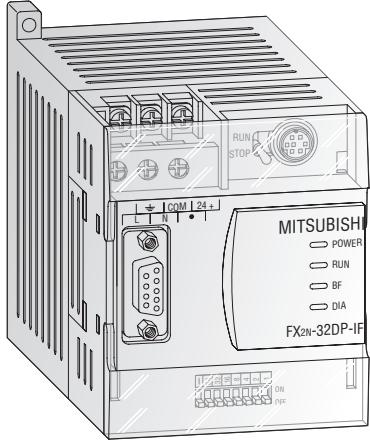

The remote I/O station FX2N-32DP-IF forms an extremely compact communication unit and provides a connection of I/O modules with up to 256 I/O points or up to 8 special function modules as an alternative.

It features an entire electrical isolation of the PROFIBUS/DP connector and of the sensor/actuator circuits.


The FX2N-32DP-IF includes a 230 V power supply unit and a 24 V service voltage

terminal, e.g. for analog modules. The FX2N-32DP-IF-D is supplied with 24 V DC. PROFIBUS data such as the baud rate or I/O data can be monitored directly with the programming software or on the hand-held programming unit FX-20P-E. This facilitates an easy error diagnosis directly on the remote I/O station.

Please refer to the Technical Catalogue Networks for further information.

Specifications	FX2N-32DP-IF	FX2N-32DP-IF-D																						
General specifications	Conforms to FX1N/FX2N/FX2NC base units																							
Power supply	100 – 240 V AC (+10 % / -10 %) 50/60 Hz	24 V DC (+20 % / -30 %)																						
Power consumption	35 VA	14 W																						
Internal current consumption	5 V DC / max. 220 mA (from base unit), 24 V DC / 500 mA	5 V DC / max. 220 mA (from base unit), 24 V DC / 190 mA																						
Interface (connectors)	9-pin D-SUB for PROFIBUS/DP, 8-pin Mini-DIN for PC or programming unit FX-20P-E																							
Communication speed	<table> <tr> <td>distance</td> <td></td> </tr> <tr> <td>1200 m</td> <td>kbit/s</td> </tr> <tr> <td>1000 m</td> <td>kbit/s</td> </tr> <tr> <td>400 m</td> <td>kbit/s</td> </tr> <tr> <td>200 m</td> <td>kbit/s</td> </tr> <tr> <td>100 m</td> <td>kbit/s</td> </tr> </table>	distance		1200 m	kbit/s	1000 m	kbit/s	400 m	kbit/s	200 m	kbit/s	100 m	kbit/s	<table> <tr> <td>9.6 / 19.2 / 45.45 / 93.75</td> <td></td> </tr> <tr> <td>187.5</td> <td></td> </tr> <tr> <td>500</td> <td></td> </tr> <tr> <td>1500</td> <td></td> </tr> <tr> <td>3000 / 6000 / 12000</td> <td></td> </tr> </table>	9.6 / 19.2 / 45.45 / 93.75		187.5		500		1500		3000 / 6000 / 12000	
distance																								
1200 m	kbit/s																							
1000 m	kbit/s																							
400 m	kbit/s																							
200 m	kbit/s																							
100 m	kbit/s																							
9.6 / 19.2 / 45.45 / 93.75																								
187.5																								
500																								
1500																								
3000 / 6000 / 12000																								
Communication distance	m	Max. 1200 (depends on communication speed)																						
Communication cable		PROFIBUS cable with 9-pin D-SUB connector																						
Max. number of controllable I/O points	256																							
Weight	kg	0.4																						
Dimensions (W x H x D)	mm	75 x 98 x 87																						

Order information	Art. no.	103705	142763

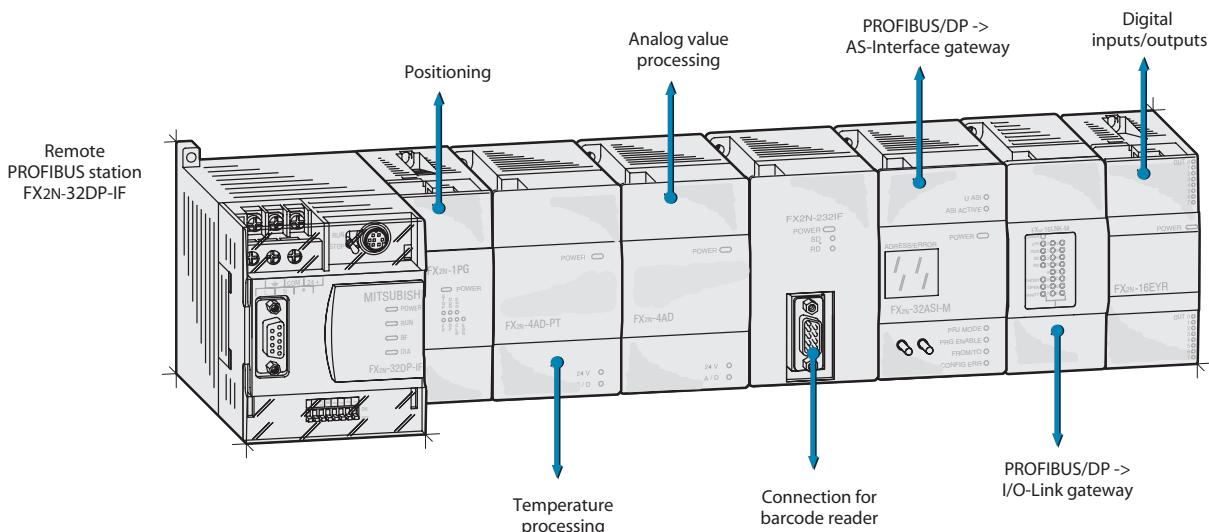

## The Network with Actor-Sensor Interface

### Features

The AS-interface is an international standard for the lowest field bus level.

The network suits versatile demands, is very flexible and particularly easy to install.

Controlled are

- Sensors
- Actors
- I/O units
- Gateways

### Structure

AS-interface can be configured in any random tree structure.

Up to 2 repeaters are supported providing a maximum communication distance of 300 m and 100 m without repeater. Terminating resistors are not needed.

### Cable Types

A special coded 2-wire cable is required.


The modules are connected to the cable via push-through connections while the coding ensures a reverse protection.

### Data Exchange

The AS-interface supports the connection of conventional sensors and actors following the master-slave principle.

### Administration


The I/O points are assigned electronically through the bus connection or through the PLC program of the FX controller.

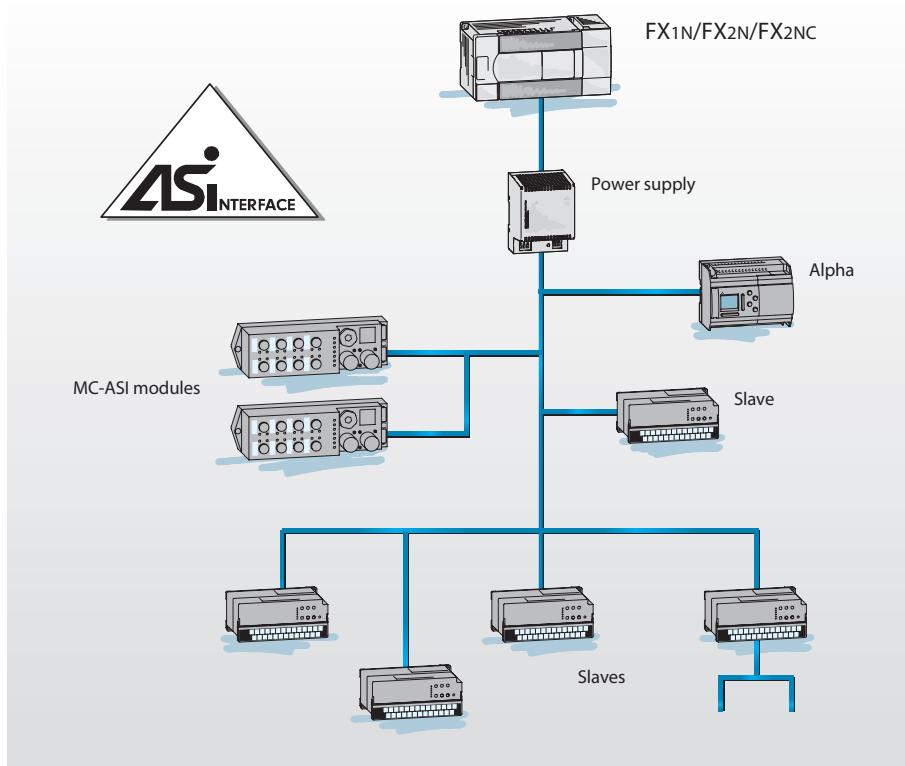

Specifications	AS interface
Network management	Master/Slave
Cabling	Coded twisted-pair cable (unshielded)
Data transfer rate	kbits/s
Bus cycle time	≤5 ms
Max. overall distance	m
Slave units per master	100 (300 with repeater)
Repeaters per network	31
	2

## ■ AS-Interface Module FX2N-32ASI-M

FX1N  FX2N  FX2NC

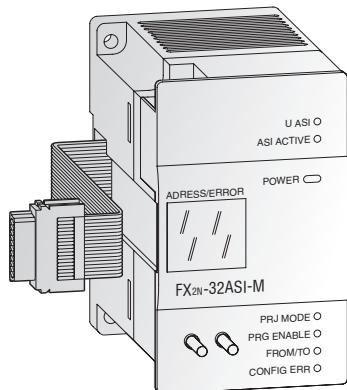


The FX2N-32ASI-M serves as master module for the connection of the FX1N/FX2N and FX2NC PLC to the AS-interface system. The FX2N-32ASI-M controls up to 31 slave units with up to 4 inputs and 4 outputs per I/O point. The I/O assignment in the AS-interface for the slave devices is performed automatically by the master.

The maximum communication distance is 100 m without repeater. Using two repeaters the maximum communication distance is extended to 300 m.

The refresh time for the maximum number of 256 I/O points is 5 ms.

Specifications	FX2N-32ASI-M
Module type	Master module
General specifications	Conforms to FX1N/FX2N/FX2NC base units
Power supply	5 V DC / 150 mA (from base unit), 24 V DC / 70 mA external
Communication protocol	AS-interface standard
Communication speed	bit/s 167,000
Method	APM method (Alternating Pulse Modulation)
Communication cable	AS-interface standard cable
Communication distance	m 100 (300 with repeater)
Max. number of controllable units	Up to 31 slave modules (up to 4 inputs / 4 outputs per slave)
I/O refresh time	Max. 5 ms
Network setup	2 key network setup
Display	7-segment display for status and diagnosis messages
Related I/O points	8
Weight	kg 0.2
Dimensions (W x H x D)	mm 50 x 90 x 87
Order information	Art. no. 103314

## ■ MELSEC AS-Interface Modules for FX2N-32ASI-M

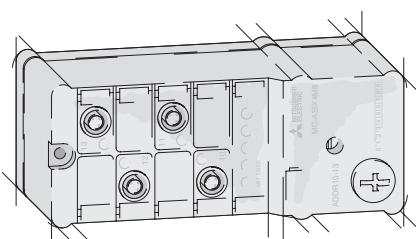

For the AS-interface master module FX2N-32ASI-M a range of digital slave modules meeting the protection rating IP67 is available for M12 connector types.

AL-ASI-BD is used to integrate an ALPHA controller AL-20M□-□ into the network. The following table shows an overview of these modules.

Please refer to the Technical Catalogue Networks for further information about the AS-interface and the here described modules.

Specifications	MC-ASI X8M12	MC-ASI X8M12	MC-ASI Y4M12-05	MC-ASI Y4M12-2	MC-ASI Y8M12	MC-ASI X2Y2M12	MC-ASI X4Y4M12
Type	Input module	Input module	Output module	I/O module	Output module	I/O module	I/O module
Number of I/Os	4	8	4	4	8	2 + 2	4 + 4
Order information	130257	130253	130241	130240	130238	130258	130255

Specifications	AL-ASI-BD
Type	I/O module
Number of I/Os	4
Order information	124894

### The MELSEC I/O Link Network

#### Features

MELSEC I/O Link enables you to operate up to 64 remote inputs and 64 remote outputs.

All I/Os in the network are automatically and cyclically updated at 5.4  $\mu$ s intervals. Up to 16 I/O modules can be connected to a master unit.

#### Structure

The data line's tree topology enables you to install T-junctions at any point, similar to a normal house service installation. You only need to ensure that the total coverage of the network does not exceed 200 m.


#### Cable Type

The network uses ordinary shielded twisted-pair cabling as the communications medium.

#### Administration

For the control program there is no difference at all between the remote I/Os and the local I/Os on the PLC's base units.

The station numbers of the remote I/O modules are set with simple rotary switches, making installation very easy. You also need to set the master station DIP switches for the assigned station numbers to ON.

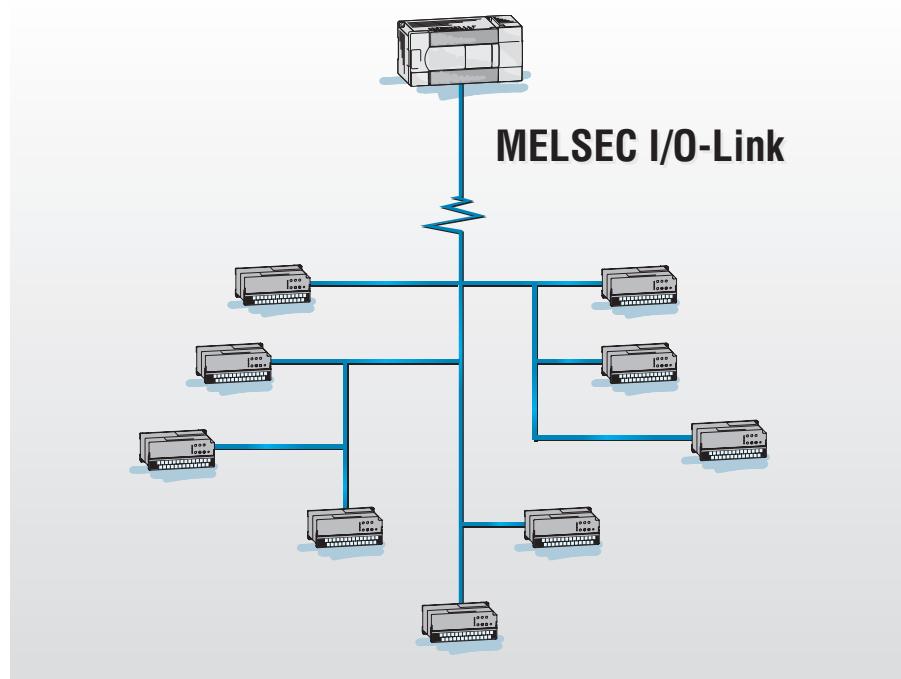


Interface	Shielded twisted-pair cabling
Cross-section	0.75 mm <sup>2</sup> (1 pair)
Loop resistance	$\leq 29 \Omega / \text{km}$
Electrostatic capacity	75 nF / km
Impedance (100 kHz)	110 $\Omega \pm 10\%$
Insulation resistance	$\geq 500 \text{ M}\Omega / \text{km}$
Maximum distance	200 m

Important: Do not exceed the specified electrostatic capacity!

## MELSEC I/O Link Master Module FX2N-16LNK-M

FX1N  FX2N  FX2NC

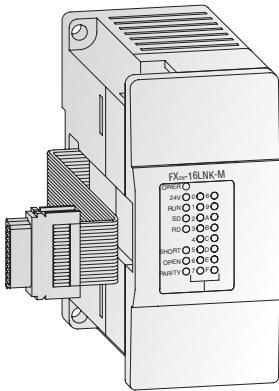


The MELSEC I/O link master module is very simple to handle. To put it into operation, all that is necessary is to set DIP switches to indicate which stations are present. Otherwise, the local I/Os behave in the same way as locally installed ones and are programmed in the same way via the PLC program.

Up to 128 inputs/output points per module can be controlled. The number of master modules is limited only by the address range of the CPU.

The cabling is made in tree structure (T connections are possible).

Specifications		FX2N-16LNK-M	
Controllable I/O points		128 (using mixed modules with 4 inputs / 4 outputs)	
I/O refresh time	ms	Approx. 5.4	
rate	bit/s	38,400	
method		Register insertion method	
synchronization method		Combination of frame-synchronization and bit-synchronization	
Communication error control system		Parity check	
transmission path		Bus / tree system	
transmission total distance	m	200	
I/O stations		16 (modules with 4 I/Os)	
Communication cable type		Shielded twisted-pair cable	
cable no. of cores		2	
diameter		≥ 0.5 mm <sup>2</sup>	
Error (RUN) display of stations		LED	
No. of occupied I/O points		64 (definable by I/O assignment)	
Applicable wire size	mm <sup>2</sup>	≥ 0.75	
External voltage supply		21.6 – 27.6 V DC	
current supply (24 V DC)	mA	90	
Internal power consumption (5 V DC)	mA	200	
Weight	kg	0.5	
Dimensions (W x H x D)	mm	43 x 90 x 87	
Order information	Art. no.	86688	

## MELSEC I/O Link Modules for FX2N-16LNK-M

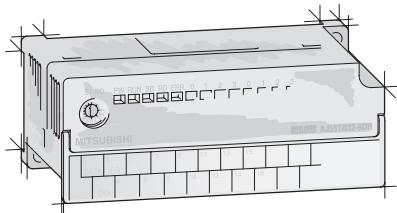

A wide range of slave modules are available for the FX2N-16LNK-M master module. The following table shows an overview of these modules.

Please refer to the Networks Technical Catalogue for further information about the MELSEC I/O Link and the here described modules.

Specifications	AJ55TB3-4D	AJ55TB3-8D	AJ55TB3-16D	AJ55TB32-4DR	AJ55TB32-8DR	AJ55TB32-16DR	AJ55TB2-4R	AJ55TB2-8R	AJ55TB2-16R
Type	Input module	Input module	Input module	I/O module	I/O module	I/O module	Output module	Output module	Output module
Number of I/Os	4	8	16	2 + 2	4 + 4	8 + 8	4	8	16
Order information	47191	47190	58548	47186	47185	58546	47189	47187	58549

## CC-Link Network

### Features

The new open fieldbus and control network CC-Link provides fast data communications with different devices. The following components among others can be integrated:

- Up to 24 PLC systems
- Remote digital I/O modules
- Remote analog I/O modules
- High-speed counters
- Positioning modules
- Modules for temperature measurement
- Distributed intelligence (e.g. FX2N)
- Frequency inverters (e.g. FR-A 540)
- Operator terminals (e.g. GOT)
- Third-party devices like gateways, solenoid valves, barcode readers, etc.

### Structure

The maximum bus segment extension is 1200 m (at 156 kbit/s max.). With a reduced extension, transfer rates of up to 10 Mbit/s can be achieved.

### Cable Types


The data communication requires standardized shielded twisted-pair cable which conforms to the CLPA specifications.

### Data Exchange

Various data like digital and analog data can be exchanged easily. In addition to the cyclic transmission of word data, CC-Link systems handle transient transmission (message transmission) as well. This enables data communication with intelligent devices such as display devices, bar code readers, measuring devices, personal computers, PLC systems and digital and analog I/Os.

### Administration

The programming software packages GX Developer and GX IEC Developer ensure an easy setup and commissioning.

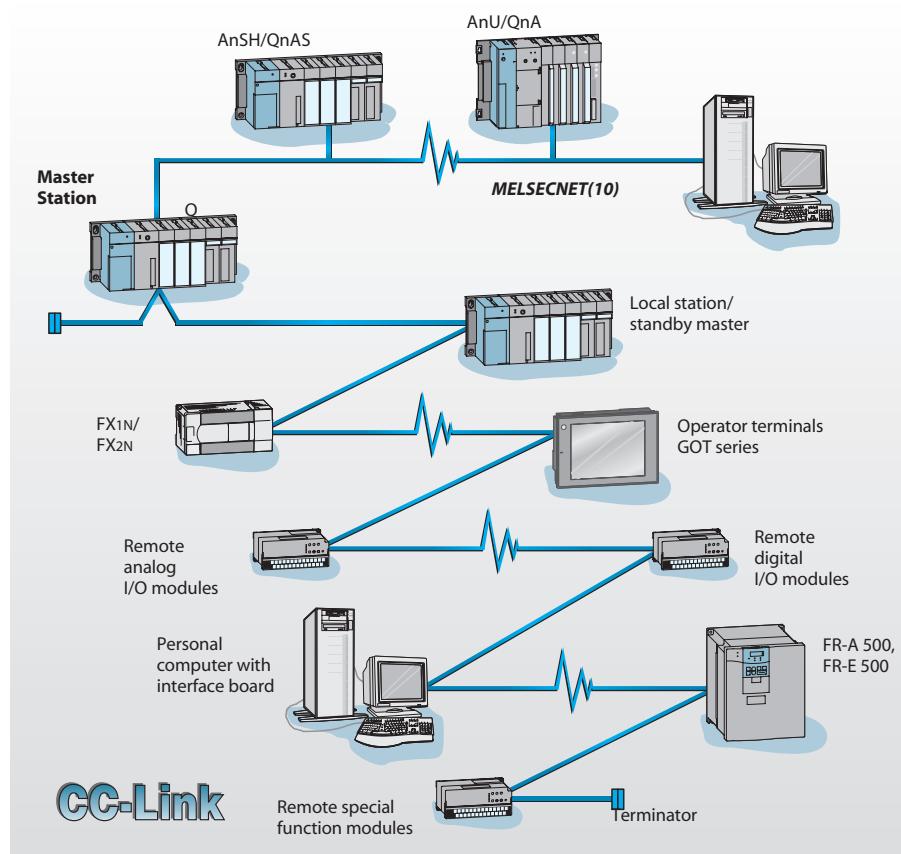

Various special features provide a particular economic network administration:


- Automatic online return function after the removal of a unit from the network
- Stand-by master function for redundancy across the system

- Automatic link cutoff function of a faulty slave station without interrupting network communications
- Link status confirmation
- Extensive test and diagnostics functions

Cable	Shielded twisted-pair (conforms to CLPA)
Diameter	0.5 mm <sup>2</sup> (1 pair)
Cable resistance (20 °C)	≤37.8 Ω / km
Electrostatic capacity (1kHz)	60 nF / km
Impedance (1 MHz)	100 Ω ±15 %
Insulation resistance	≥10000 MΩ / km
Voltage withstand	500 V DC for 1 minute
Maximum distance	1200 m

## ■ CC-Link Master Module FX2N-16CCL-M

FX1N  FX2N  FX2NC

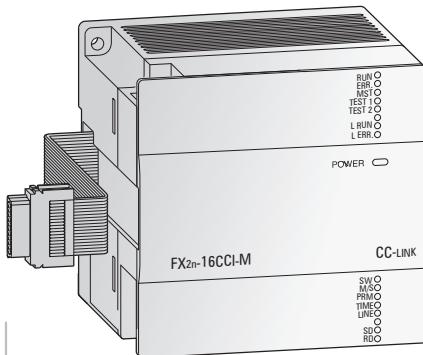

The CC-Link network enables the controlling and monitoring of decentralized I/O modules at the machine.

The CC-Link master module FX2N-16CCL-M is a special extension block which assigns an FX series PLC as the master station of the CC-Link system.

The setting of all modules within the network is handled directly via the master module.

Up to 15 remote stations and remote device stations can be connected to the master station as decentralized I/O stations. These remote stations can be up to 7 I/O modules and up to 8 intelligent modules. 2 master modules can be connected to one FX1N/FX2N/FX2NC base unit.

The maximum communications distance is 1200 m without repeater.

### Specifications


### FX2N-16CCL-M

Module type	Master station	
General specifications	Conforms to FX1N/FX2N/FX2NC base units	
Power supply	5 V DC / 130 mA max. (via base unit), 24 V DC / 50 mA	
Link points per station	I/O points register	32
		8
Decentral I/O points		128 (FX1N), 256 (FX2N, FX2NC)*
Number of connectable modules		Max. 15
I/O refresh time	ms	3.9 – 6.7
Synchronization method		Frame synchronization
Modulation		NRZI
Transmission path		BUS (RS485)
Transmission format		HDLC
Transmission speed	Mbit/s	10 / 5 / 2.5 / 0.625 / 0.156
Communication distance	m	100 m at 10 Mbit/s, 150 m at 5 Mbit/s, 200 m at 2.5 Mbit/s, 600 m at 0.62 Mbit/s, 1200 m at 0.15 Mbit/s
Transmission cable		Shielded cable conforming CLPA standard
Status display		5 LEDs (Power, L RUN, L ERR, SD, RD)
Power supply		5 V DC / max. 130 mA (from base unit), 24 V DC / 50 mA
Related I/O points		8
Weight	kg	0.4
Dimensions (W x H x D)	mm	85 x 90 x 87

### Order information

Art. no. 133596

\*8 I/O addresses each per Slave are subtracted from the total sum.

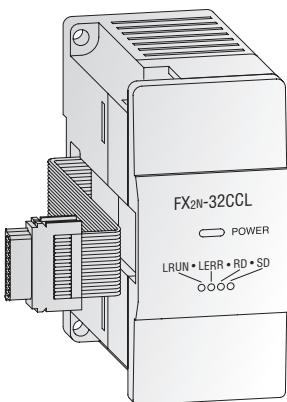

## ■ CC-Link Communication Module FX2N-32CCL

FX1N  FX2N  FX2NC


The communication module FX2N-32CCL enables the user to connect to the CC-Link network with a superior PLC system as master CPU. This gives him access to the network of all MELSEC PLC systems and frequency inverters and to additional products from other suppliers.

Thus the network is expandable via the digital inputs/outputs of the FX modules to a maximum of 256 I/Os.

The buffer memory of the FX2N-32CCL is read and written by FROM/TO instructions. The connection is to the extension bus on the right side of the controller.

Specifications		FX2N-32CCL
Module type		Local station
Station numbers	no.	1 – 64 points
	stations	1 – 4
General specifications		Conforms to FX1N/FX2N/FX2NC base units
Power supply		5 V DC / max. 130 mA (via base unit), 24 V DC / 50 mA
Communication speed	Mbit/s	10 / 5 / 2.5 / 0.625 / 0.156
Communication distance	m	100 m at 10 MBit/s, 150 m at 5 MBit/s, 200 m at 2.5 MBit/s, 600 m at 0.62 MBit/s, 1200 m at 0.15 MBit/s
Communication cable		Shieldedcable conforming CLPA standard
Link addresses/station		32 I/O points
Status display		5 LEDs (Power, L RUN, L ERR, RD, SD)
Related I/O points		8
Weight	kg	0.2
Dimensions (W x H x D)	mm	43 x 90 x 87
Order information		Art. no. 102961

## ■ MELSEC CC-Link Modules for FX2N-16CCL-M

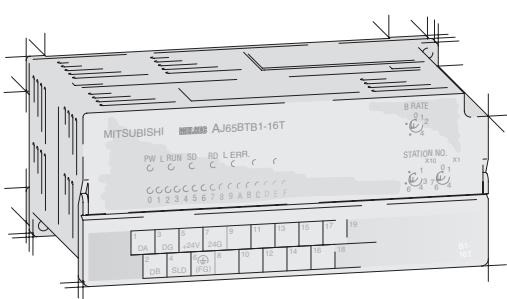

A wide range of slave modules are available for the CC-Link system. Among digital and analog remote I/O modules, different counters, positioning and interface modules are available.

The tables on the following page show an overview of these modules.

Please refer to the Networks Technical Catalogue for further information.

## Overview of the MELSEC CC-Link Modules

### Remote Inputs and Outputs

Besides three different input and output modules with up to 32 inputs, two combination module with 8 inputs and 8 outputs are available.

The remote output modules output the signals within short distance to the machine.

Specifications	AJ65BTB1-16D	AJ65BTB2-16D	AJ65BTC1-32D	AJ65BTB1-16T	AJ65BTC1-32T	AJ65TB2-16R	AJ65BTB1-16DT	AJ65TB2-16DR
Module type	Input modules				Output modules			
Inputs	16	16	32	—	—	—	8	8
Outputs	—	—	—	16	32	16	8	8
Output type	—	—	—	Transistor	Transistor	Relay	Transistor	Relay
<b>Order information</b>	Art. no.	75447	75450	75455	75449	75456	75453	75448
								75451

### Analog linking to the CPU

The analog input module AJ65BT-64AD converts analog process signals into digital values that can be processed by the CPU.

### Digital to analog converter modules

The modules AJ65BT-64DAV and AJ65BT-64DAI serve as remote 4-channels digital to analog converter modules with 12-bit or 13-bit binary resolution and output an analog current or voltage signal.

### Temperature measuring via thermocouples

The module AJ65BT-68TD supports temperature measurements via thermocouples.

Specifications	AJ65BT-64AD	AJ65BT-64DAV	AJ65BT-64DAI	AJ65BT-64RD3	AJ65BT-64RD4	AJ65BT-68TD
Input points	4	4	4	4	4	8
Input type	Analog	Digital	Digital	Pt100 (3-wire type)	Pt100 (4-wire type)	Thermocouple
<b>Order information</b>	Art. no.	75444	75446	75445	88026	88027
						88025

### Automatic hardware counter

The high-speed counter modules AJ65BT-D62 and AJ65BT-62D / 62D-S1 acquire signals at a frequency which conventional input modules cannot acquire. Positioning tasks or frequency measurements for example can be performed.

### Positioning with an open control loop


The module AJ65BT-D75P2-S3 generates the go command via a pulse chain. The velocity is proportional to the pulse frequency. The travel is proportional to the pulse length.

### Data exchange with peripherals

The module AJ65BT-R2 serves for the communication with peripheral devices through a standard RS232 interface. The module AJ65BT-G4-S3 serves for the communication with peripheral devices through a standard RS422 interface. The peripherals are connected point to point (1:1).

Specifications	AJ65BT-D62	AJ65BT-62D / 62D-S1	AJ65BT-D75P2-S3	AJ65BT-G4-S3	AJ65BT-R2
Module type	High-speed counter	High-speed counter	Positioning module	RS422 interface module	RS232 interface module
Function	2 counters (1 or 2 phases)	2 counters (1 or 2 phases)	2 control axes	1 x RS422 (25 pole)	1 x RS232 (D-Sub, 9 pole)
<b>Order information</b>	Art. no.	88028	88029 / 88030	88002	134389
					88003

All listed modules are also available in compact design with even smaller dimensions. Please refer to the Technical Catalogue Networks for further details.



## DeviceNet

### Features

DeviceNet represents a cost-effective solution for the network integration of low-level terminal equipment. Up to 64 devices including a master can be integrated in one network.

### Structure

Due to the supported tree structure of the data line, a T-junction can be installed in any place. It has to be considered that the overall extension must not exceed 500 m.

Using repeaters increases the overall extension to 3 km.

### Cable Types

For the data exchange a cable with two shielded twisted-pair cables is used.

### Parameterization

Parameterization is done with the configuration software SyCon from Ver. 2.0.6.2 by the Hilscher company.

### Communications

The bus accessing method CSMA/NDA ensures an extremely fast and efficient access of the link devices to the bus.


Based on the Producer/Consumer network model this method ensures greater determinism of all data.

The slave modules communicate via the following methods:

- Polling
- Bit strobe
- Change of state
- Cyclic


Information at a size of 8 bytes per data packet can be transmitted. Packets exceeding these 8 bytes are fragmented automatically.

### Daisy Chain

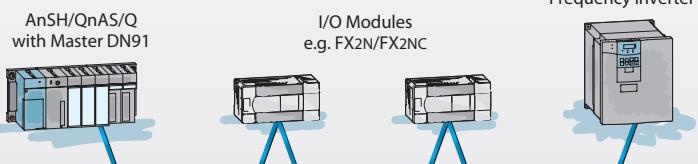

## DeviceNet


### Trunk Line / Drop Line

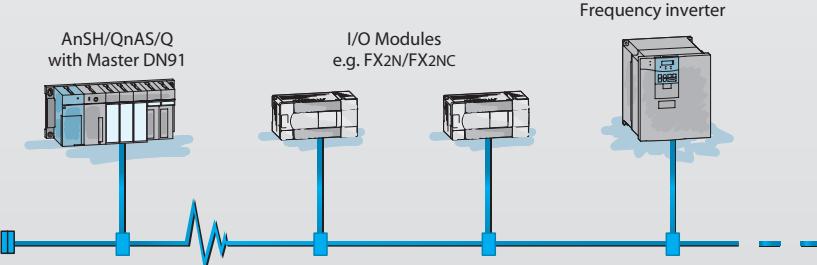

Cable	Thick Cable	Thin Cable
Outline diameter	mm	12,2
Inside wire for data (blue / white)		18AWG19x30 zinc plated
Inside wire for power supply (red / black)		15AWG19x28 zinc plated
Trunkline	Yes	Yes
Dropline	Yes	Yes
Max. distance	m	500
Max. distance incl. repeater	m	3000

## ■ DeviceNet Slave Module FX2N-64DNET

FX1N  FX2N  FX2NC

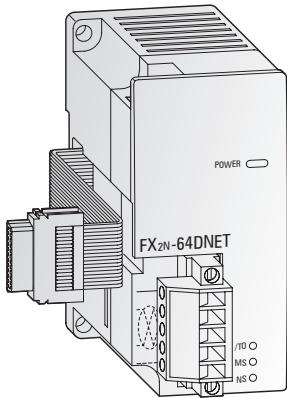

The DeviceNet slave module FX2N-64DNET can be used to connect FX2N and FX2NC programmable controller to a DeviceNet network. The FX2N-64DNET is a slave (group 2) on DeviceNet.

The FX2N-64DNET can communicate to the master by the master/slave communication (using the master/slave I/O connection), and to other nodes supporting the UCMM connection by client/server communication (using the UCMM connection).

The communication method for I/O connection supports "polling", "cyclic" and "change of state".

The communication between the programmable controller and the internal buffer memory of the FX2N-64DNET is handled by FROM/TO instructions.

Specifications		FX2N-64DNET	
Module type		Slave	
Node type		G2 Server	
Station numbers		0 – 63 points	
Supported communication speeds	kBaud	125, 250, 500	
Communication cable		DeviceNet standard (see table on previous page)	
Communication data (open connection)	Master/slave UCMM client/server	no. of connections transfer time-out no. of connections data length	1 connection (group 2) 2,000 ms (ACK time-out) 63/63 (group 1, 3) Max. 64 byte per connection
Communication data (I/O connection)		type data length	Polling, cyclic, change of state Max. 64 bytes (fragmentation is possible)
Module ID code			K7090
Status displays			Power, module status, network status
Related I/O points			8
External power supply		V DC	24
current consumption		mA	50
Internal power consumption (5 V DC)		mA	120
Weight		kg	0,2
Dimensions (W x H x D)		mm	43 x 90 x 87
Order information		Art. no.	131708

## CANopen Network

### Network Description

CANopen is an "open" implementation of the Controller Area Network (CAN), which is defined in the EN50325-4 standard. It was developed by members of the CAN in Automation international users and manufacturers group. The CANopen application layer defines a range of communications services and protocols (e.g. process and service data) and a network management system.

CANopen networks are used for connecting sensors, actuators and controllers in industrial control systems, medical equipment, maritime electronics, railways, trams and commercial vehicles.

### Structure

A CANopen bus system has a linear structure to which up to 127 bus stations can be connected. Multiple master stations can be connected to a single bus. The ends of the linear bus are terminated with resistors. Total network length can be up to 40m at a data transfer rate of 1Mbit/s. Lowering the data rate makes it possible to increase the length of the bus. For example, a transfer rate of 125kBit/s allows a bus length of 500 m. This can be increased to a maximum of 5,000 m with the help of repeaters (at 10 kBit/s).


### Cabling

The bus uses inexpensive twisted-pair cabling.

### Data Transfer

The protocol used in CANopen is extremely reliable. A variety of methods, including 15-bit CRC (cyclic redundancy check), are implemented to identify corrupt data and malfunctioning bus stations.


Data can be transmitted cyclically in broadcast mode, or in event-controlled mode.

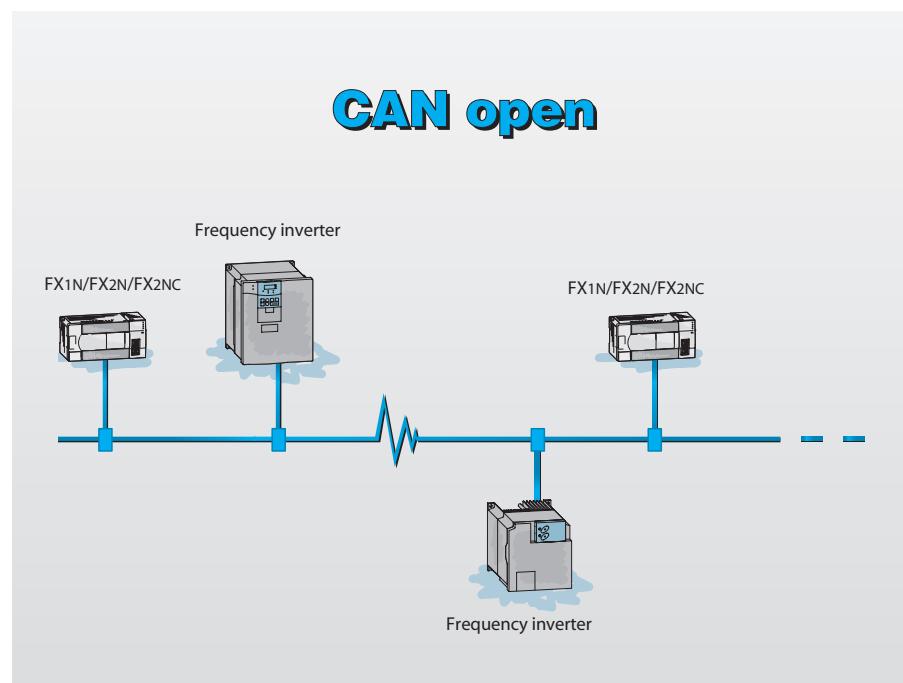

Cable	Shielded twisted pair cable
Diameter	0,5 mm <sup>2</sup> (1 pair)
Cable resistance (20 °C)	≤37,8 Ω / km
Electrostatic capacity (1kHz)	60 nF / km
Impedance (1 MHz)	100 Ω ±15 %
Insulation resistance	≥10.000 MΩ / km
Voltage withstand	500 V DC for 1 minute
Maximum distance	1.200 m

## ■ Communications Module for CANopen FX2N-32CAN

FX1N  FX2N  FX2NC

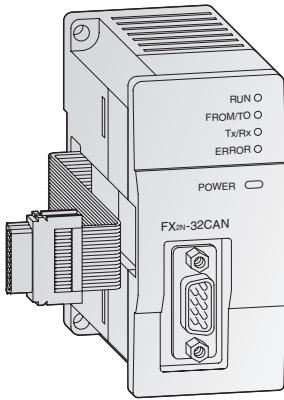

The FX2N-32CAN communications module makes it possible to connect an FX1N/FX2N or FX2NC PLC to an existing CANopen network.

In addition to real-time capabilities and high-speed data transfer at rates of up to 1Mbit/s the CANopen module also shines with high transfer reliability and simple network configuration.

Up to 120 data words can be sent and received as process data objects (30 PDOs). The number of words that can be transmitted in each direction can be set between 1 and 120.

Communication with the module's memory buffer is performed with simple FROM/TO instructions.

The network node address (station number) can be set to any value between 1 and 127. Up to 30 nodes can be connected to the bus per segment. If bridge or repeater devices are used the number of nodes can be increased to 127.

Specifications	FX2N-32CAN
Module type	CANopen master
General specifications	Conforms to FX1S/FX1N/FX2N base units
Power supply	5 V DC (via base unit)
CAN standard	ISO 11898/1993
CANopen standard by CiA	DS-301 version 3.0
Additional CANopen features	NMT, Guarding, and Guarding request based on DS-302 V2.0. network variables based on DS-405 V1.0
Max. number of modules that can be connected to the network	30 without repeater; 127 with repeater
Station numbers	1 – 127
Supported baud rate	kBaud
Transmission cable	10, 20, 50, 125, 250, 500, 800, 1000
Status displays	CANopen standard (see table on page before)
Number of occupied I/O points	RUN, Error, Power, Network status
Internal power consumption (5 VDC)	mA
External power supply	290
Weight	kg
Dimensions (W x H x D)	mm
<b>Order information</b>	
Art. no.	141179

### MELSEC Peer-to-Peer Network, Multidrop Network, Parallel Link


#### The networks in details:

##### ● Peer-to-Peer Network

You can integrate up to 8 programmable logic controllers in a peer-to-peer network.

All stations in the network can monitor all the devices in the entire data range. However, data writing, setting and resetting of individual devices is always only performed in the specific station in question.

Each network station can transfer packets of up to 64 bits and 8 data words via the network.

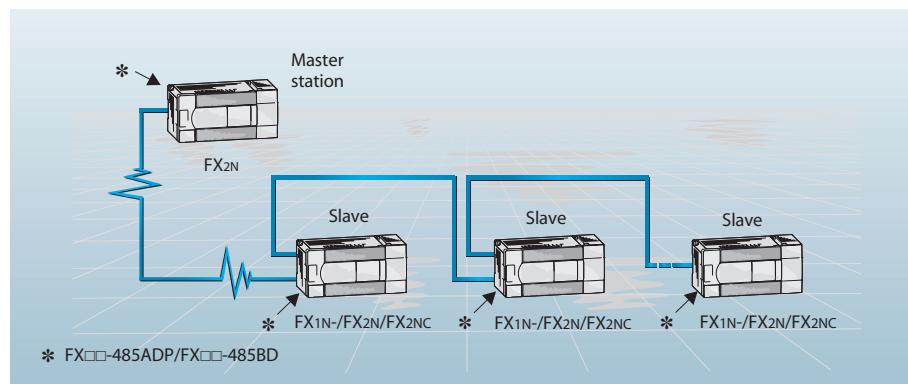

##### ● 1 : n Multidrop Network

This network is used for displaying and monitoring data from the individual stations on a connected computer.

You can connect up to 16 stations in one of these networks. The maximum distance between the first and last connected station depends on the type of adapters used:


The maximum distance between the first and last connected stations depends on the type of adapters used:

FX0N-485ADP: max. 500 m (CPU vers. 2.0)

FX1N-485BD: max. 50 m

FX2N-485BD: max. 50 m

FX2NC-485ADP: max. 500 m

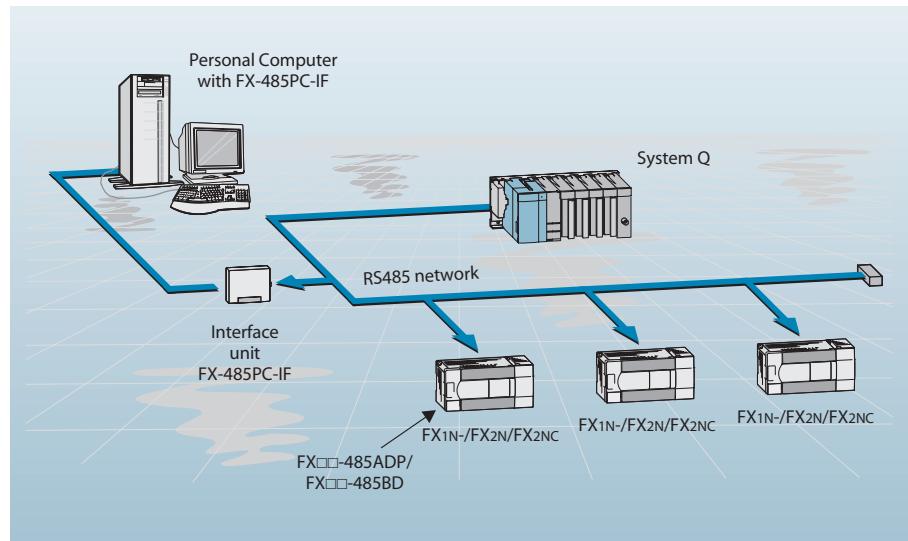


##### ● Parallel Link

As the name indicates, parallel link mode connects two programmable logic controllers with a parallel link. Data communication between the two stations is performed automatically via a predefined range of relays and data registers.


The maximum distance between two stations connected by parallel link is 50 m.

If the FX0N-485ADP or FX2NC-485BD is used, the maximum distance will be 500 m.

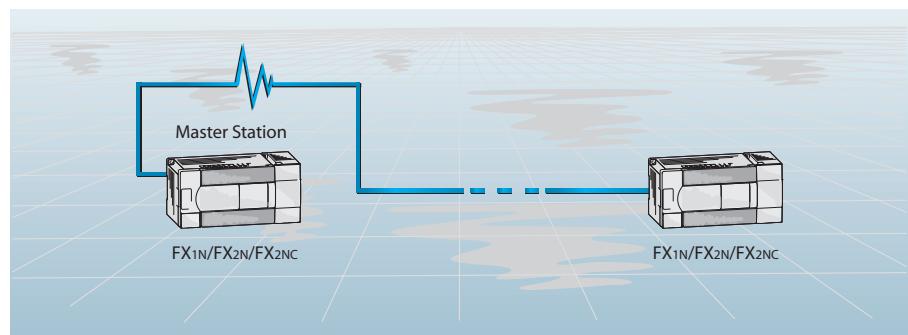

## ■ Interface Adapters FX1N-485BD and FX2N-485BD

FX1N  FX2N  FX2NC

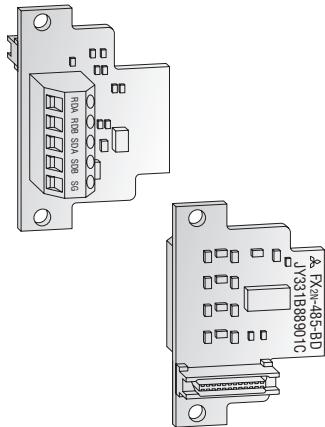

The interface adapters FX□N-485BD provide the FX1N/FX2N with an additional RS485 interface. The adapter, which is simply inserted into the base unit's expansion slot, enables the configuration of RS485 1:n multidrop, parallel link or peer-to-peer networks with FX1N/FX2N systems.

You can also transfer data directly to other RS485 peripherals using the RS dedicated instruction.


In peer-to-peer network configurations the interface adapter enables active communication between the individual FX1N/FX2N controllers via the RS485 interfaces.

In 1:n multidrop networks the adapter can be used to provide communication with a host master station of the A series.

Specifications	FX1N-485BD	FX2N-485BD
Applicable for	FX1S/FX1N base units	FX2N base units
General specifications	Conforms to FX1S/FX1N/FX2N base units	
Power supply	5 V DC / 60 mA from base unit	
Interface	RS485 / RS422	
Communication speed	bit/s 300 – 19,200	
Communication cable	Twisted-pair	
Communication distance	m Max. 50	
Protocols	Protocol 1 or 4 of AJ71UC24 / no protocol / parallel link / peer-to-peer network	
Related I/O points	Station 0	0
Weight	kg 0.02	0.08
Dimensions (W x H x D)	mm 43 x 38,5 x 22	35 x 54 x 22
Order information	Art. no. 130742	65597

FX1N  FX2N  FX2NC

## ■ Communication Modules FXON-485ADP and FX2NC-485ADP

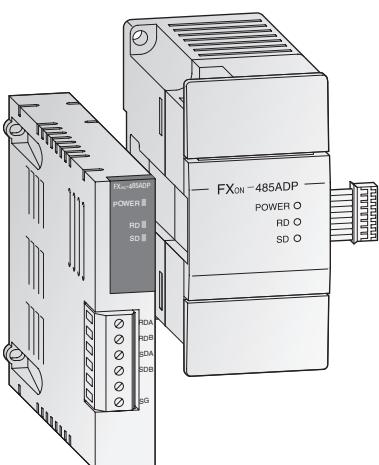

The communication modules FXON-485ADP and FX2NC-485ADP enable the configuration of 1:n multidrop, parallel link or peer-to-peer networks using the RS485 interface.


The communication module is connected directly to the communication bus on the left-hand side of the FX1N base unit.

The FX1N-CNV-BD communication adapter is required for connection to a FX1N base unit. For the connection to a FX2N base unit the communicationsadapter FX2N-CNV-BD is required.

Specifications	FXON-485ADP	FX2NC-485ADP
General specifications	Conforms to FX1S/FX1N/FX2N/FX2NC base units	
Power supply	5 V DC / max. 30 mA (from base unit), 24 V DC / 50 mA	5 V DC / max. 150 mA (from base unit)
Interface	RS485	RS485
Communication speed	Bit/s 300 – 19200	300 – 19200
Communication distance	m Max. 500	Max. 500
Communication cable	Shielded cable	Shielded cable
Communication mode	Half duplex	Half duplex
Protocols	Protocol 1 and 4 of AJ71UC24	
Related I/O points	0	0
Weight	kg 0.3	0.1
Dimensions (W x H x D)	mm 43 x 90 x 87	19.1 x 90 x 78
Order information	Art. no. 66665	149111

## ■ Interface Unit for RS485 1:n Multidrop Network FX-485PC-IF

FX1N  FX2N  FX2NC

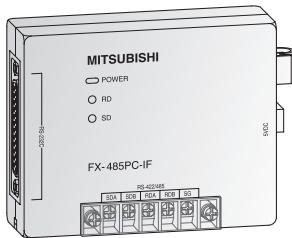


The interface unit FX-485PC-IF is used for converting interface signals.

The interface unit has an RS232C interface for connection to a PC and RS485 ports for connection to the 1:n multidrop network.

Specifications	FX-485PC-IF
General specifications	Conforms to FX1N/FX2N/FX2NC base units
Current consumption	mA 260
Power supply	5 V DC ±5 %
Interface	RS232 / RS485
Communication speed	bit/s 300, 600, 1200, 2400, 4800, 9600, 19200
Communication cable	Shielded cable
Communication distance	m 15 (RS232) 500 (RS485)
Communication mode	Half duplex
Protocols	Protocol 1 and 4 of AJ71UC24
Weight	kg 0.3
Dimensions (W x H x D)	mm 100 x 80 x 30

Order information	Art. no. 53416
-------------------	-------------------

The power supply is used for the interface unit FX-485PC-IF.

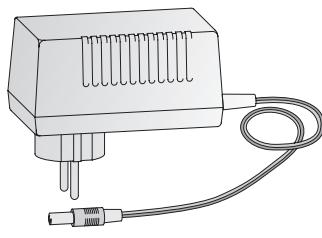


Specifications	SC06 N-PG
General specifications	Conforms to FX-485PC-IF
Power supply	5 V DC / 800 mA
Weight	kg 0.2
Dimensions (W x H x D)	mm 60 x 100 x 100

Order information	Art. no. 32630
-------------------	-------------------

## ■ Interface Converter CR01-R2/R4 SET and CR01-R4/R4

FX1N  FX2N  FX2NC

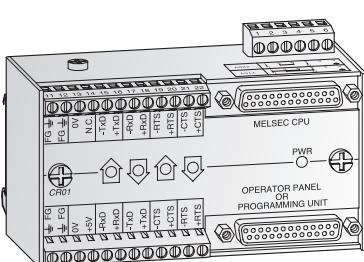


The interface converter CR01-R2/R4 SET and CR01-R4/R4 are signal amplifiers with photocoupler isolation for RS422 signals. They are used to connect a PLC with external devices like operation panels or a personal computer, especially when a poten-

tial isolation is required and when the wiring length takes more than 15 meters. If one module is connected to a PLC and another one to an operator panel or a personal computer, a max. distance of 1200 m is possible.

Specifications	CR01-R2/R4 SET	CR01-R4/R4
Interface converting	RS422 ↔ RS232	RS422 ↔ RS422
Order information	Art. no. 56172	56173

## ■ Communication Adapter FX2N-CNV-IF and FX2NC-CNV-IF

FX1N  FX2N  FX2NC

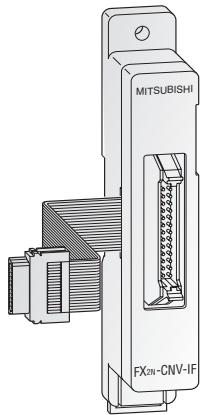

The communications adapter FX2N-CNV-IF enables you to connect your FX series special function modules to FX1N/FX2N systems.

The communication adapter provides compatibility between the FX1N/FX2N CPU and


the digital FX modules and special function modules.

The communications adapter FX2NC-CNV-IF enables you to connect your FX series special function modules to a FX2NC systems.

Specifications	FX2N-CNV-IF	FX2NC-CNV-IF
Application range	FX1N/FX2N	FX2NC
General specifications	Conforms to FX1N/FX2N/FX2NC base units	
Power supply	Not necessary	
Related I/O points	0	
Weight	kg	0.15
Dimensions (W x H x D)	mm	23 x 140 x 45
<b>Order information</b>	Art. no.	65599
		104508

## ■ Communication Adapters FX1N-CNV-BD and FX2N-CNV-BD

FX1N  FX2N  FX2NC

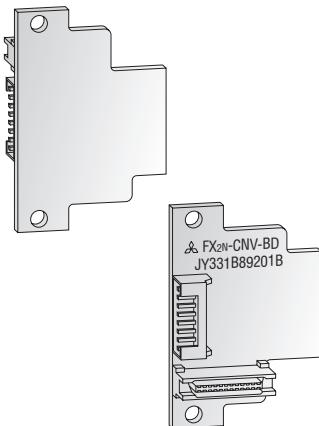


The communication adapters FX□N-CNV-BD enable connection of the FX0N-232ADP and FX0N-485ADP special function modules to

the left-hand side of the FX1N and FX2N base units.

Specifications	FX1N-CNV-BD	FX2N-CNV-BD
Applicable for	Base units FX1S/FX1N	Base units FX2N
General specifications	Conforms to FX1N/FX2N base units	
Power supply	Not necessary	
Related I/O points	0	0
Weight	kg	0.01
Dimensions (W x H)	mm	43 x 38 x (D) 14
<b>Order information</b>	Art. no.	130745
		65598


## ■ PROM Adapter FX-ROM SOC1

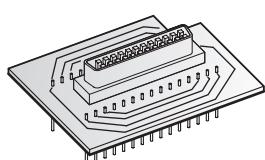

The PROM adapter FX-ROM SOC1 is used for adapting memory cassettes to a textool base.

This socket is required if the memory cassette FX-EPROM-8 is to be written with a commercial EPROM loader in order, for example, to load a MELSOFT program.

Specifications	FX-ROM SOC1
<b>Order information</b>	Art. no. 27163

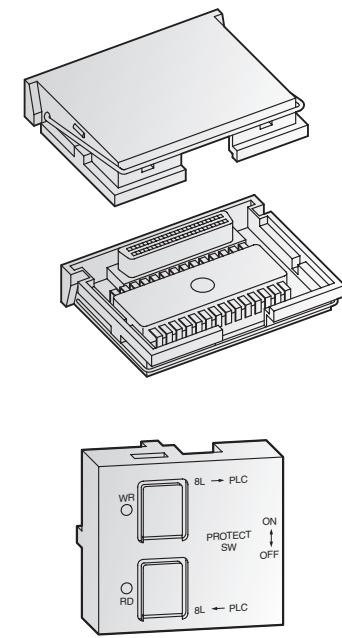

## Memory Cassettes

FX1N  FX2N  FX2NC

All FX1s, FX1N and FX2N base units are equipped with a slot for the optional, robust FX memory cassettes.

By connection of these memory cassettes, the internal memory of the controller is switched off and only the program specified in the respective memory cassette is run. The memory size can be extended for all FX2N controllers up to 16,000 steps with the memory cassette FX-RAM-8.

The FX1N-EEPROM-8L is a program memory, which is a writing/reading unit for data transfer at the same time.

The FX2N-ROM-E1 memory module simplifies the direct communication between the FX2N and the Mitsubishi Electric frequency inverters of the series FR-S500, FR-E500, and FR-A500.

The FX2N-ROM-E1 technically corresponds to the FX-EEPROM-16.

Specifications	FX-RAM-8	FX-EPROM-8	FX-EEPROM-4
Memory type	RAM	EPROM	EPPROM
Size	16,000 steps (FX2N)	8,000 steps	4,000 steps
Applicable for CPU type	FX2N	FX2N	FX2N

Specifications	FX-EEPROM-8	FX1N-EEPROM-8L	FX-EEPROM-16	FX2N-ROM-E1
Memory type	EEPROM	EEPROM	EEPROM	EEPROM
Size	8000 steps	2000/8000 steps	16000 steps	16000 steps
Applicable for CPU type	FX2N	FX1s/FX1N	FX2N	FX2N

Order information	Art. no.	23823	23824	23825



All the FX2NC base units have a slot for adding a memory and real-time clock cassettes. The FX2NC-ROM-CE1 module contains both EEPROM memory and a real-time clock. The FX2NC-EEPROM-16 pro-

vides only memory, without the clock feature, and the FX2NC-RTC is a real-time clock cassette for the FX2NC PLCs without any additional memory.

Specifications	FX2NC-ROM-CE1	FX2NC-EEPROM-16	FX2NC-RTC
Memory type	EEPROM + RTC	EEPROM	RTC (real time clock)
Size	16,000 steps	16,000 steps	—
Applicable for CPU type	FX2NC	FX2NC	FX2NC

Order information	Art. no.	149016	104507	137206

## Batteries F2-40BL and FX2NC-32BL

FX1N  FX2N  FX2NC


The battery buffers the internal RAM of the MELSEC PLC in the event of a voltage failure. The battery F2-40BL can be used for all base units of the MELSEC FX2N series.

The battery FX2NC-32BL is suitable for all base units of the MELSEC FX2NC series and for the positioning modules FX2N-20GM.

Specifications	F2-40BL	FX2NC-32BL
Application	FX2N base units	FX2NC base units and FX2N-20GM
Order information	Art. no. 5142	128725

## ■ Display Module FX1N-5DM

FX1N  FX2N  FX2NC



The display module FX1N-5DM is inserted directly into the controller and enables monitoring and editing of the data stored in the PLC.

The display module e.g. can be used instead of digital switches and external 7-segment displays in very confined areas.

The following detailed functions can be performed by the FX1N-5DM:


- Bit and word device monitoring (X, Y, M, S and T, C, D)
- Current and set values can be altered during monitoring (T, C and D)
- Devices can be forced on and off (Y, M and S)
- Current time of the real-time clock can be displayed and set
- Error code display

Specifications	FX1N-5DM
General specifications	Conforms to FX1N base units
Power supply	5 V DC ±5 % (from base unit)
Current consumption	mA
Display	LCD (with backlight)
Weight	kg
Dimensions (W x H x D)	mm

Order information	Art. no.
	129197

## ■ Control and Display Panel FX-10DM-E

FX1N  FX2N  FX2NC

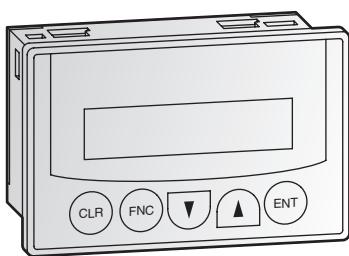

The control and display panel FX-10-DM-E provides a key-oriented user-interface and enables you to monitor and edit process data in the PLC.

The display is arranged in 2 rows for 16 characters each. Functions can be invoked and values can be edited via keys.

The connection to the PLC is set up by the FX-20P-CAB0 cable.

The following detailed functions can be performed by the FX-10-DM-E:

- Word device monitoring
- Comments or message can be attached to up to 8 devices
- Message display (ASCII code) from data registers
- Current and set values can be altered for the displayed device
- Current time of the real-time clock can be displayed and set


Specifications	FX-10DM-E
General specifications	Conforms to FX1N/FX2N base units
Application	All FX1s/FX1N/FX2N base units
Power supply	5 V DC ±5 % (from base unit)
Current consumption	mA
Display	LCD (with backlight)
Resolution	2 x 16 signs (80 x 16 pixels)
Weight	kg
Dimensions (W x H x D)	mm

Order information	Art.-Nr.
	132600

Please refer to the HMI Technical Catalogue for further control panels.

## ■ Simulation Strip Input-SIM

FX1N  FX2N  FX2NC

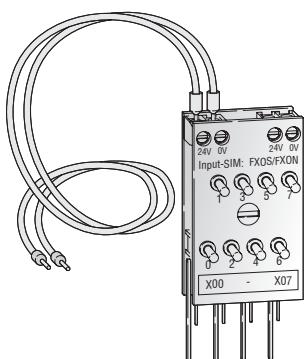

The simulation strip Input-SIM has 8 switches for simulating digital inputs. The simulation strip is directly mounted to the terminals of the base unit and fixed with screws to the terminal block. A cable is provided for connecting the simulation strip to the power supply.

Two different simulation strips are available due to the differences within the terminal block between the MELSEC FX1N and FX2N series PLCs.

The simulation strip can be expanded with another strip for further inputs.


Specifications	Input-SIM: FXos/FXon	Input-SIM: FX2N
Switches	8	8
Application	FX1s and FX1N series	FX2N series
Dimensions (W x H x D) mm	30 x 50 x 15	30 x 50 x 15

Order information Art. no. 65081

66513

## ■ Simulation Box

FX1N  FX2N  FX2NC

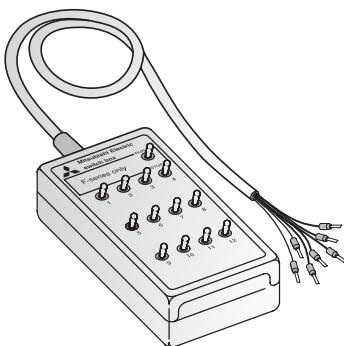

The simulation box has 12 switches for simulating digital inputs.


It can be used on all controllers of the MELSEC FX family.

Specifications	Simulation Box
Switches	12

Order information Art. no. 3386

## ■ Connection Cable for Modular and Compact Extension Units

FX1N  FX2N  FX2NC

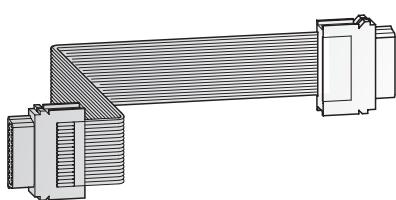

The FX0N-65EC cable is used for connection between a modular unit or and a compact extension unit.

This permits a double-row arrangement of a MELSEC FX1N/FX2N system.

The cable must be connected to the left side of the compact extension unit.

The FX2N-CNV-BC cable is used for connection between a special function module and a modular extension unit in combination with the FX0N-65EC.


Specifications	FX0N-65EC	FX2N-CNV-BC
Type	Flat cable	Flat cable connector
Length / Dimensions m	0.65	W 60 x H 40 x D 16

Order information Art. no. 45348


70880

## Terminal Blocks


FX1N  FX2N  FX2NC

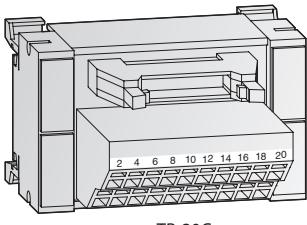

TB-20

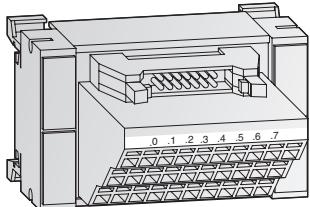


TB-□EX□

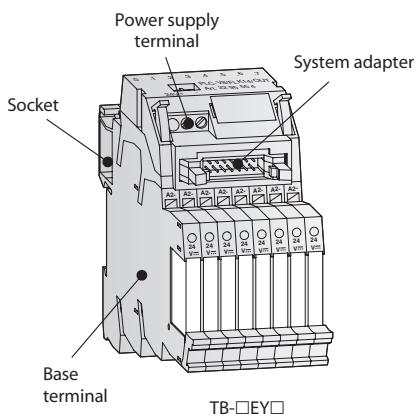

TB-□EY□

### Construction of the base terminal

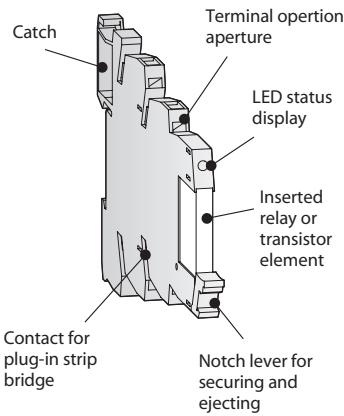

These terminal blocks are adapter modules that simplify the wiring of the inputs and outputs of the FX2NC units with ribbon cable connectors. This practical, time-saving wiring system also improves the performance of the outputs. Special terminal blocks are also available for the FX2N positioning modules with ribbon cable connectors.

Input blocks, output blocks and combined I/O blocks are available, with a choice of different terminal types.

The TB-□EX□ input blocks are fitted with rows of connectors for Kelvin terminals (24V / 0V), which make wiring quick and easy.

The TB-8EY-S and TB-8EY-C output blocks consist of 8 standard terminals and a system adapter. The standard terminals can be populated with relay or transistor elements, which makes it possible to configure the system for much higher output currents.

Preconfigured system cabling is available for all the terminal blocks (see next page).

Specifications	TB-8EX-S	TB-8EX-C	TB-16EX-S	TB-16EX-C
Block type	Input block	Input block	Input block	Input block
Number of inputs	8	8	16	16
Design	Initiator module with potential terminals			
Connection type	Screw terminals	Spring terminals	Screw terminals	Spring terminals
Application	FX2NC series base and extension modules with connectors			
Dimensions (W x H x D)	mm	75 x 45 x 54	75 x 45 x 63	116 x 45 x 54
Order information	Art. no.	149144	149145	149021
Accessories		Connection cable (refer to the following page)		

Specifications	TB-8EY-S	TB-8EY-C	TB-20-S	TB-20C
Block type	Output block	Output block	Input/output block	Input/output block
Channels	8	8	8 / 16	8 / 16
Design	Socket for relay or transistor elements		20 pin terminal module	
Connection type	Screw terminals	Spring terminals	Screw terminals	Spring terminals
Application	FX2NC series base and extension modules with connectors		FX2N series positioning modules	
Dimensions (W x H x D)	mm	49.6 x 100 x 94	49.6 x 100 x 94	75 x 45 x 52
Order information	Art. no.	149044	149045	149148
Accessories		Plug-in function elements (see below), connection cable (refer to the following page)		Connection cable (refer to the following page)


The transistor and relay elements are plugged directly into the standard terminals in the TB-8EY-S or TB-8EY-C modules. All the elements feature a status LED, protection against reverse polarity connection and a freewheeling diode.

Neighbouring terminals with identical voltages can be connected with plug-in strip bridge connectors, which can be cut to length as required.

Specifications	TB-8RELAY-6A	TB-8TRANSISTOR-2A
Output type	Relay with 1 switch-over contact	Transistor (with optocoupler)
Number of elements	8	8
Rated input voltage	24 V DC	24 V DC
Min./max. switching voltage	12 V AC/DC; 250 V AC/DC	3 V DC; 33 V DC
Limit permanent current	6 A	3 A (at 20 °C), 2 A (at 60 °C)
Max. breaking capacity	140 W (24 V DC), 1500 VA (250 V AC)	—
Ambient temperature	-20 – +60 °C	-20 – +60 °C
Order information	Art. no. 149034 (set with 8 elements)	149035 (set with 8 elements)
Accessories	Iisolated strip bridge connector for potential isolation, TB-PIB-RD, colour red, art. no.: 149146; Isolated strip bridge connector for potential isolation, TB-PIB-BL, colour blue, art. no.: 149147; Isolation plate TB-SP for the lateral closing of the base terminal, art. no.: 149158	

## ■ Connection Cable

FX1N  FX2N  FX2NC

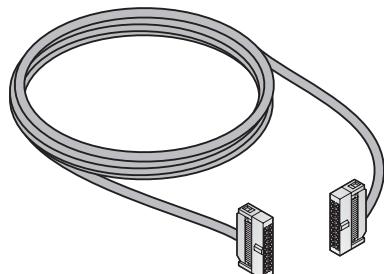

These preconfigured cables enable quick, error-free wiring of the terminal blocks of the FX2NC base and expansion units and the positioning modules of the FX2N series fitted with ribbon cable connectors.


The cables are available in a choice of lengths between 1 and 5 m. Other lengths are also possible by special order.

Specifications	TB-EX-CAB-1M	TB-EX-CAB-3M	TB-EX-CAB-5M
Application	For TB-□EX□ and TB-20-□ (1:1 cable)		
Length m	1	3	5

Specifications	TB-EY-CAB-1M	TB-EY-CAB-3M	TB-EY-CAB-5M
Application	For 2 x terminal blocks TB-8EY-S or TB-8EY-C (Y cable)		
Length m	1	3	5

## ■ Connection terminals

FX1N  FX2N  FX2NC

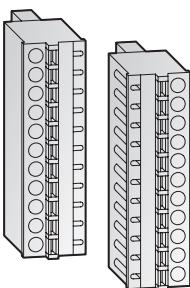

The base unit FX2NC-16MR-T-DS and the extension units FX2NC-16EX-T-DS and FX2NC-16EYR-T-DS are fitted with screw terminals as standard equipment.


These plug-in terminals can easily be replaced with spring terminals if required. Two replacement terminal units are required for each module with 16 I/Os.

Specifications	TB-CON10-C	TB-CON-11C
Number of terminal points	10	11
Connection type	Spring terminals	Spring terminals
Application	Extension units FX2NC-16EX-T-DS and FX2NC-16EYR-T-DS	Base unit FX2NC-16MR-T-DS
Dimensions (W x H x D) mm	12.5 x 39 x 21	12.5 x 43 x 21

**Order information** Art. no. 149036 149037

## ■ 24 V Power Supply Unit

FX1N  FX2N  FX2NC

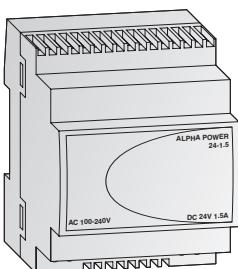

The Alpha Power is a convenient power supply for the 24 V units and other external devices. It comes with a DIN rail mounting system and its dimensions are matched to those of the MELSEC FX family.

Two Alpha Power units can be installed together for redundant mode operation or connected in parallel for more power. The units have an integrated thermal overload protection circuit.

Specifications	ALPHA POWER 24-1.4
General specifications	Conforms to FX family base units
Nominal input voltage	100–240 V (45 – 65 Hz)
Output voltage	24 V DC (+/- 3 %)
Nominal output current	1.5 A (at T = 55 °C), 2.0 A (at T = 40 °C)
Max. output current	2 A (110 V AC), 4 A (230 V AC)
Application	Power supply for 24 V DC base units
Ambient temperature	-25 – +55 °C (operation), -40 – +85 °C (storage)
Ambient humidity	Max. 95 % (no condensation)
Weight kg	0.2
Dimensions (W x H x D) mm	71 x 90 x 57.8

**Order information** Art. no. 149046


## ■ Base Units MELSEC FX1N

FX1N-14MT-DSS

FX1N-14MR-DS

FX1N-14MT-ESS/UL

FX1N-14MR-ES/UL

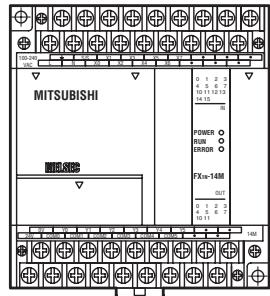

FX1N-14MR-ES/UL

FX1N-14MT-ESS/UL

FX1N-14MR-DS


FX1N-14MT-DSS

FX1N-24MT-DSS

FX1N-24MR-DS

FX1N-24MT-ESS/UL

FX1N-24MR-ES/UL

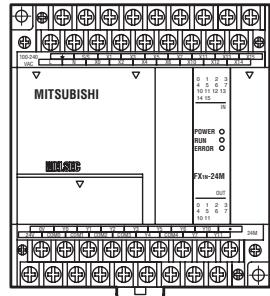

FX1N-24MR-ES/UL

FX1N-24MT-ESS/UL

FX1N-24MR-DS


FX1N-24MT-DSS

FX1N-40MT-DSS

FX1N-40MR-DSL

FX1N-40MT-ESS/UL

FX1N-40MR-ES/UL

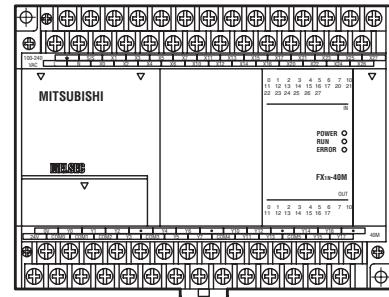

FX1N-40MR-ES/UL

FX1N-40MT-ESS/UL

FX1N-40MR-DS

FX1N-40MT-DSS



## TERMINALS + DIMENSIONS

FX1N-60MT-DSS      

	S/S	X1	X3	X5	X7	X11	X13	X15	X17	X21	X23	X25	X27	X31	X33	X35	X37	X41	X43
⊕	⊖	X0	X2	X4	X6	X10	X12	X14	X16	X20	X22	X24	X26	X30	X32	X34	X36	X40	X42

FX1N-60MR-DS      


	S/S	X1	X3	X5	X7	X11	X13	X15	X17	X21	X23	X25	X27	X31	X33	X35	X37	X41	X43
⊕	⊖	X0	X2	X4	X6	X10	X12	X14	X16	X20	X22	X24	X26	X30	X32	X34	X36	X40	X42

FX1N-60MT-ESS/UL      

	S/S	X1	X3	X5	X7	X11	X13	X15	X17	X21	X23	X25	X27	X31	X33	X35	X37	X41	X43
L	N	X0	X2	X4	X6	X10	X12	X14	X16	X20	X22	X24	X26	X30	X32	X34	X36	X40	X42

FX1N-60MR-ES/UL      

	S/S	X1	X3	X5	X7	X11	X13	X15	X17	X21	X23	X25	X27	X31	X33	X35	X37	X41	X43
L	N	X0	X2	X4	X6	X10	X12	X14	X16	X20	X22	X24	X26	X30	X32	X34	X36	X40	X42

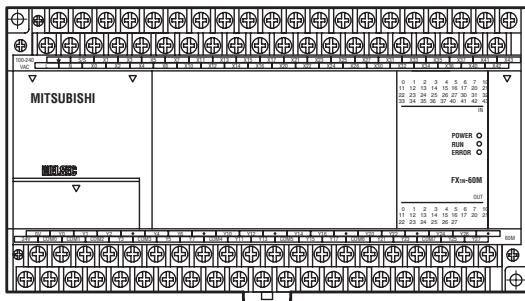

FX1N-60MR-ES/UL      

OV	Y0	Y1	Y2	•	Y4	Y6	•	Y10	Y12	•	Y14	Y16	•	Y20	Y22	•	Y24	Y26	•
24V	[COM0]	[COM1]	[COM2]	Y3	[COM3]	Y5	Y7	[COM4]	Y11	Y13	[COM5]	Y15	Y17	[COM6]	Y21	Y23	[COM7]	Y25	Y27

FX1N-60MT-ESS/UL      

OV	Y0	Y1	Y2	•	Y4	Y6	•	Y10	Y12	•	Y14	Y16	•	Y20	Y22	•	Y24	Y26	•
24V	+VO	+V1	+V2	Y3	+V3	Y5	Y7	+V4	Y11	Y13	+V5	Y15	Y17	+V6	Y21	Y23	+V7	Y25	Y27

FX1N-60MR-DS      

OV	Y0	Y1	Y2	•	Y4	Y6	•	Y10	Y12	•	Y14	Y16	•	Y20	Y22	•	Y24	Y26	•
24V	[COM0]	[COM1]	[COM2]	Y3	[COM3]	Y5	Y7	[COM4]	Y11	Y13	[COM5]	Y15	Y17	[COM6]	Y21	Y23	[COM7]	Y25	Y27

FX1N-60MT-DSS      

OV	Y0	Y1	Y2	•	Y4	Y6	•	Y10	Y12	•	Y14	Y16	•	Y20	Y22	•	Y24	Y26	•
24V	+VO	+V1	+V2	Y3	+V3	Y5	Y7	+V4	Y11	Y13	+V5	Y15	Y17	+V6	Y21	Y23	+V7	Y25	Y27

FX1N-60MR-ES/UL      


OV	Y0	Y1	Y2	•	Y4	Y6	•	Y10	Y12	•	Y14	Y16	•	Y20	Y22	•	Y24	Y26	•
24V	+VO	+V1	+V2	Y3	+V3	Y5	Y7	+V4	Y11	Y13	+V5	Y15	Y17	+V6	Y21	Y23	+V7	Y25	Y27

## ■ Base Units MELSEC FX2N

FX2N-16MT-ESS/UL

FX2N-16MR-ES/UL

FX2N-16MR-DS

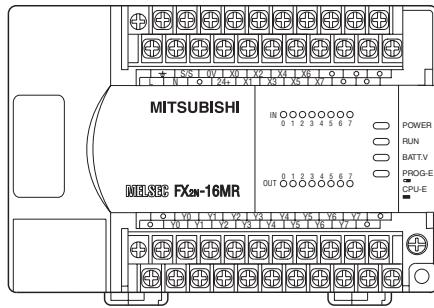

FX2N-16MR-DS

FX2N-16MR-ES/UL


FX2N-16MT-ESS/UL

FX2N-32MT-DSS

FX2N-32MT-ESS/UL

FX2N-32MR-DS

FX2N-32MR-ES/UL

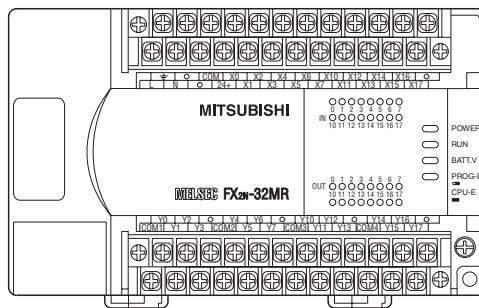

FX2N-32MR-ES/UL

FX2N-32MR-DS

FX2N-32MT-ESS/UL


FX2N-32MT-DSS

FX2N-48MT-DSS

FX2N-48MT-ESS/UL

FX2N-48MR-DS

FX2N-48MR-ES/UL

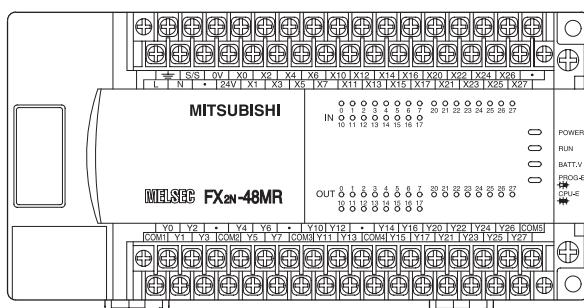

FX2N-48MR-ES/UL

FX2N-48MR-DS

FX2N-48MT-ESS/UL

FX2N-48MT-DSS


## TERMINALS + DIMENSIONS

FX2N-64MT-DSS     

FX2N-64MT-ESS/UL     

FX2N-64MR-DS     

FX2N-64MR-ES/UL     

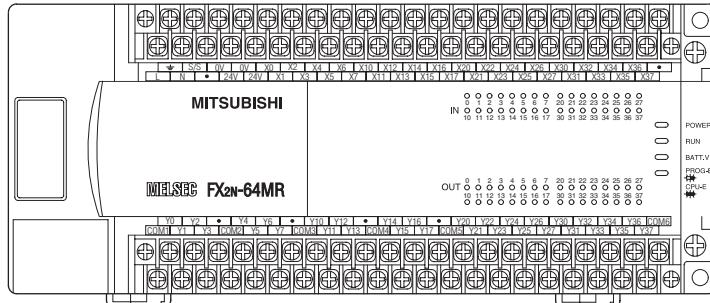

FX2N-64MR-ES/UL     

FX2N-64MR-DS     

FX2N-64MT-ESS/UL     


FX2N-64MT-DSS     

FX2N-80MT-DSS     

FX2N-80MT-ESS/UL     

FX2N-80MR-DS     

FX2N-80MR-ES/UL     


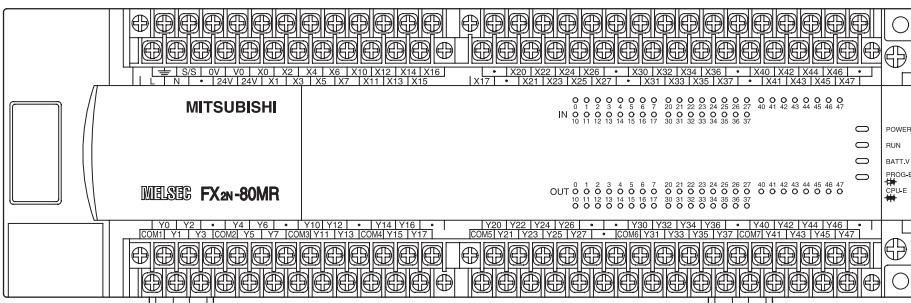


FX2N-80MR-ES/UL     


FX2N-80MR-DS     

FX2N-80MT-ESS/UL     

FX2N-80MT-DSS

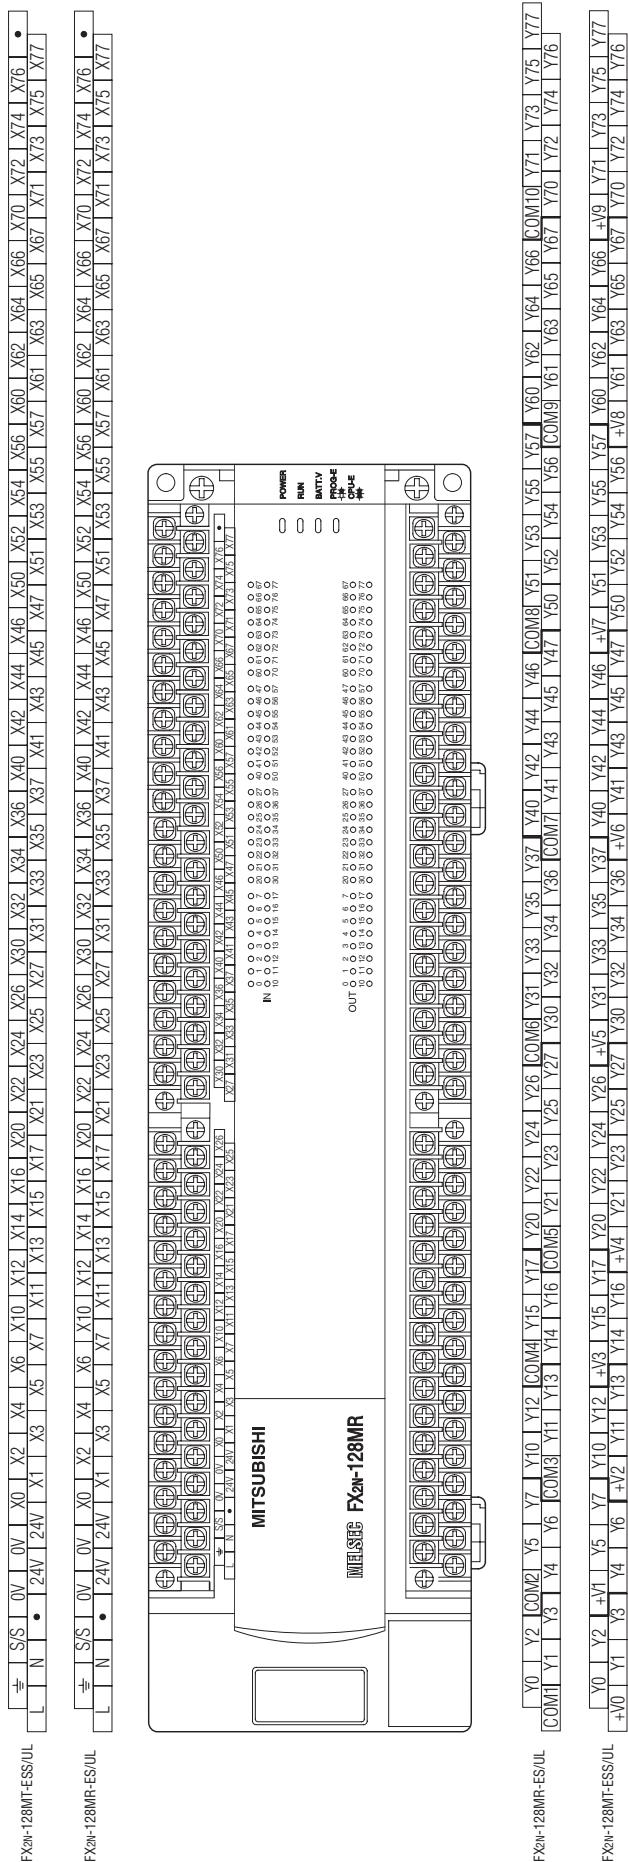

■ Base Units MELSEC FX2NC

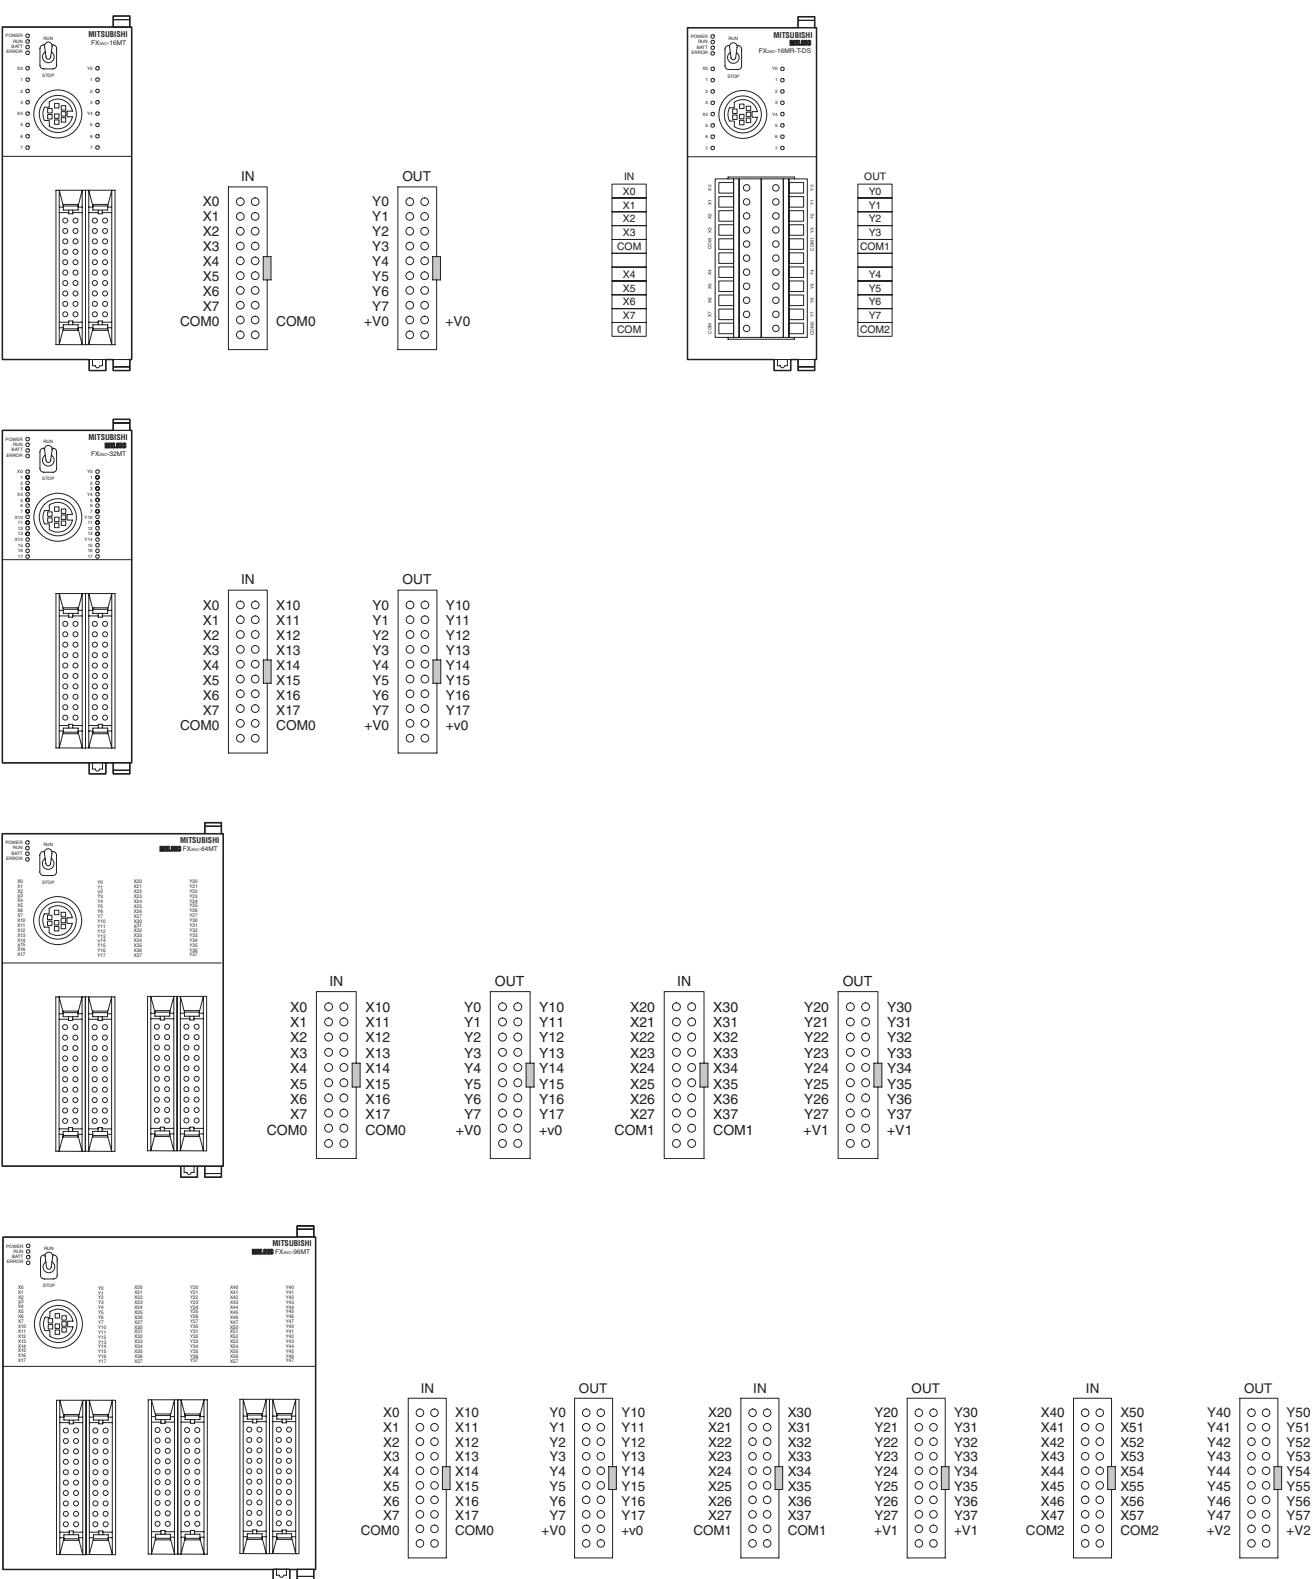


## ■ Compact Extension Units MELSEC FXOn

FXON-40ET-DSS

FXON-40ER-DS

FXON-40ER-ES/UL

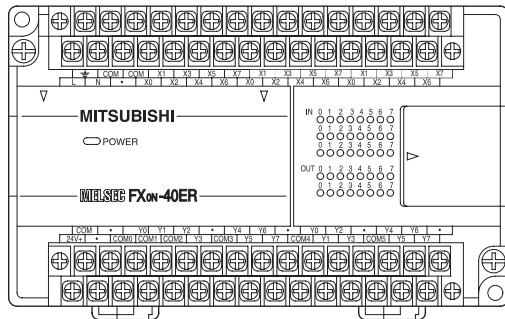

FXON-40ER-ES/UL

FXON-40ER-DS

FXON-40ET-DSS



## ■ Modular Extension Units MELSEC FXOn

FXON-16EYT-ES/UL

FXON-16EYR-ES/UL




FXON-16EX-ES/UL

FXON-8EYT-ESS/UL

FXON-8EYR-ES/UL

FXON-8EX-ES/UL

FXON-8ER-ES/UL

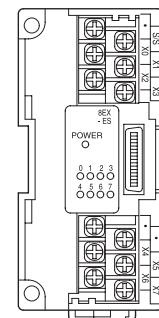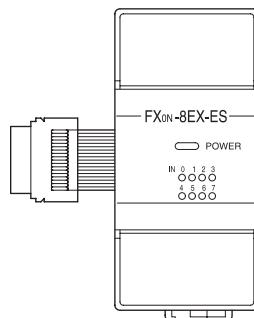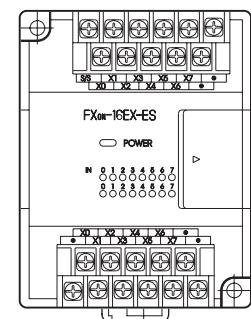

FXON-16EX-ES/UL

FXON-16EYR-ES/UL

FXON-16EYT-ES/UL




**■ Compact Extension Units MELSEC FX2N**

 FX2N-32ET-ESS/UL  

±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	•
L	N	•	24V	X1	X3	X5	X7	X1	X3	X5	X7

 FX2N-32ER-ES/UL  

±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	•
L	N	•	24V	X1	X3	X5	X7	X1	X3	X5	X7

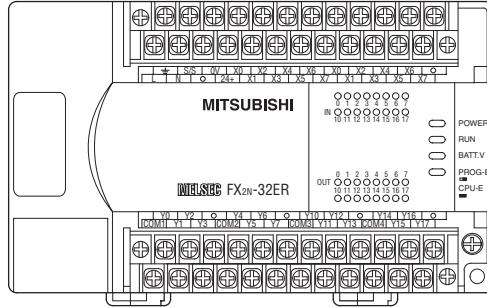
 FX2N-32ER-ES/UL  

Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	•
COM1	Y1	Y3	COM2	Y5	Y7	COM3	Y1	Y3	COM4	Y5	Y7

 FX2N-32ET-ESS/UL  

Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	•
+V0	Y1	Y3	+V1	Y5	Y7	+V2	Y1	Y3	+V3	Y5	Y7

 FX2N-48ET-DS  

±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	X0	X2	X4	X6	•
+	-	•	24V	X1	X3	X5	X7	X1	X3	X5	X7	X1	X3	X5	X7

 FX2N-48ET-ES/UL  


±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	X0	X2	X4	X6	•
L	N	•	24V	X1	X3	X5	X7	X1	X3	X5	X7	X1	X3	X5	X7

 FX2N-48ER-DS  

±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	X0	X2	X4	X6	•
+	-	•	24V	X1	X3	X5	X7	X1	X3	X5	X7	X1	X3	X5	X7

 FX2N-48ER-ES/UL  

±	S/S	0V	X0	X2	X4	X6	X0	X2	X4	X6	X0	X2	X4	X6	•
L	N	•	24V	X1	X3	X5	X7	X1	X3	X5	X7	X1	X3	X5	X7

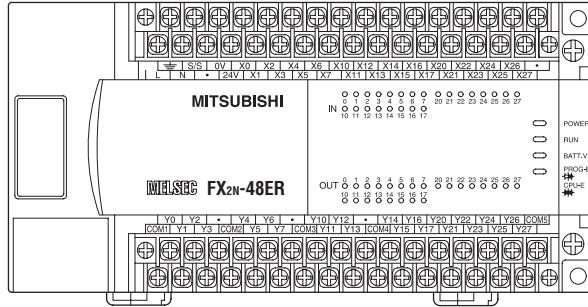
 FX2N-48ER-ES/UL  

Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	Y0	Y2	Y4	Y6	COM5
COM1	Y1	Y3	COM2	Y5	Y7	COM3	Y1	Y3	COM4	Y5	Y7	Y1	Y3	Y5	Y7

 FX2N-48ER-DS  

Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	Y0	Y2	Y4	Y6	COM5
COM1	Y1	Y3	COM2	Y5	Y7	COM3	Y1	Y3	COM4	Y5	Y7	Y1	Y3	Y5	Y7

 FX2N-48ET-ES/UL  


Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	Y0	Y2	Y4	Y6	+V4
+V0	Y1	Y3	+V1	Y5	Y7	+V2	Y1	Y3	+V3	Y5	Y7	Y1	Y3	Y5	Y7

 FX2N-48ET-DS  


Y0	Y2	•	Y4	Y6	•	Y0	Y2	•	Y4	Y6	Y0	Y2	Y4	Y6	+V4
+V0	Y1	Y3	+V1	Y5	Y7	+V2	Y1	Y3	+V3	Y5	Y7	Y1	Y3	Y5	Y7

## ■ Modular Extension Units MELSEC FX2N


FX2N-16EX-ES/UL

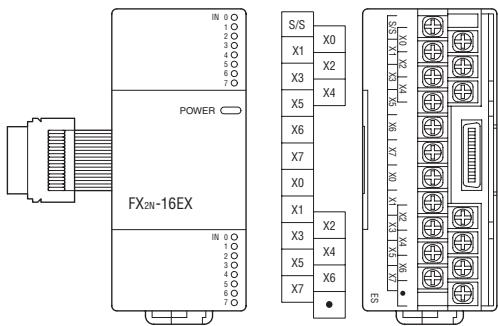

FX2N-16EYT-ESS/UL

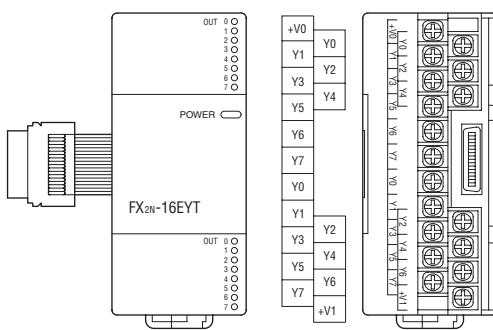


FX2N-16EYR-ES/UL

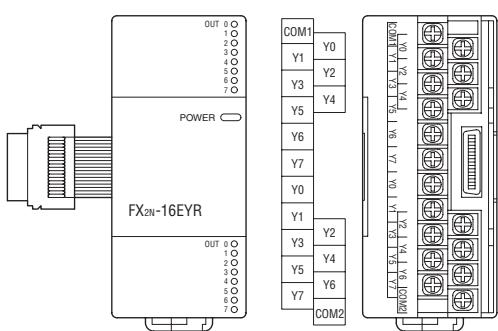


## ■ Extension Adapter Boards MELSEC FX1N

FX1N-4EX-BD




FX1N-2EYT-BD




## ■ Extension Units MELSEC FX2NC


FX2NC-16EX-DS

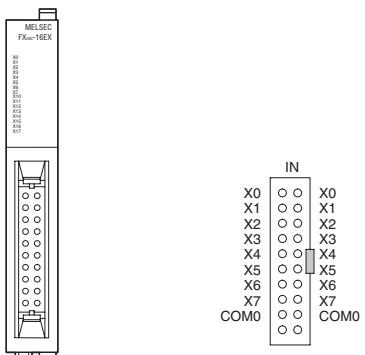


FX2NC-16EYT-DSS

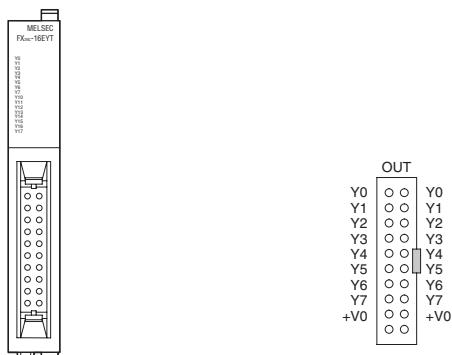


FX2NC-16EX-T-DS

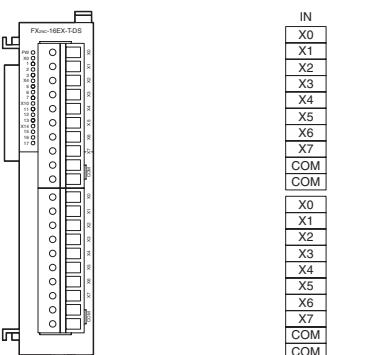


FX2NC-16EYR-T-DS

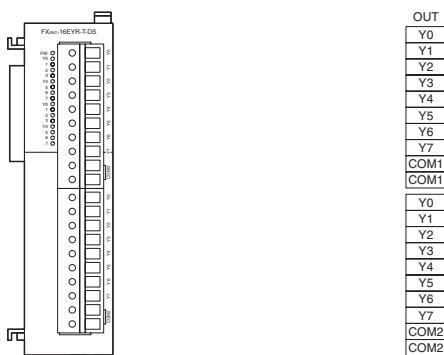

FX2NC-32EX-DS

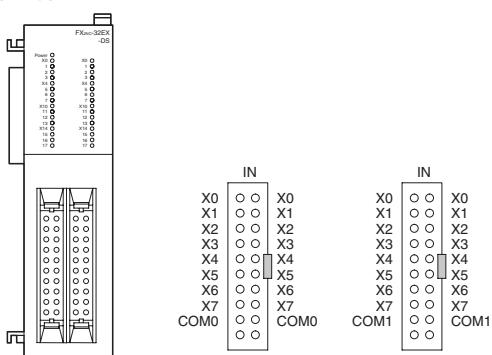


FX2NC-32EYT-DS

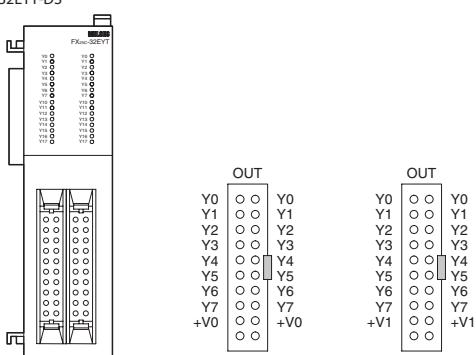


## ■ Analog modules MELSEC FX2NC

FX2NC-4DA

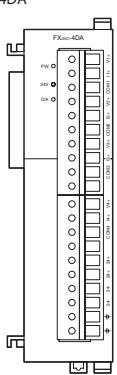


FX2NC-4AD

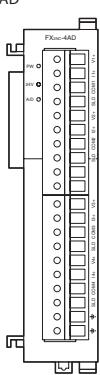


## ■ Analog Modules MELSEC FX2N

BASICS

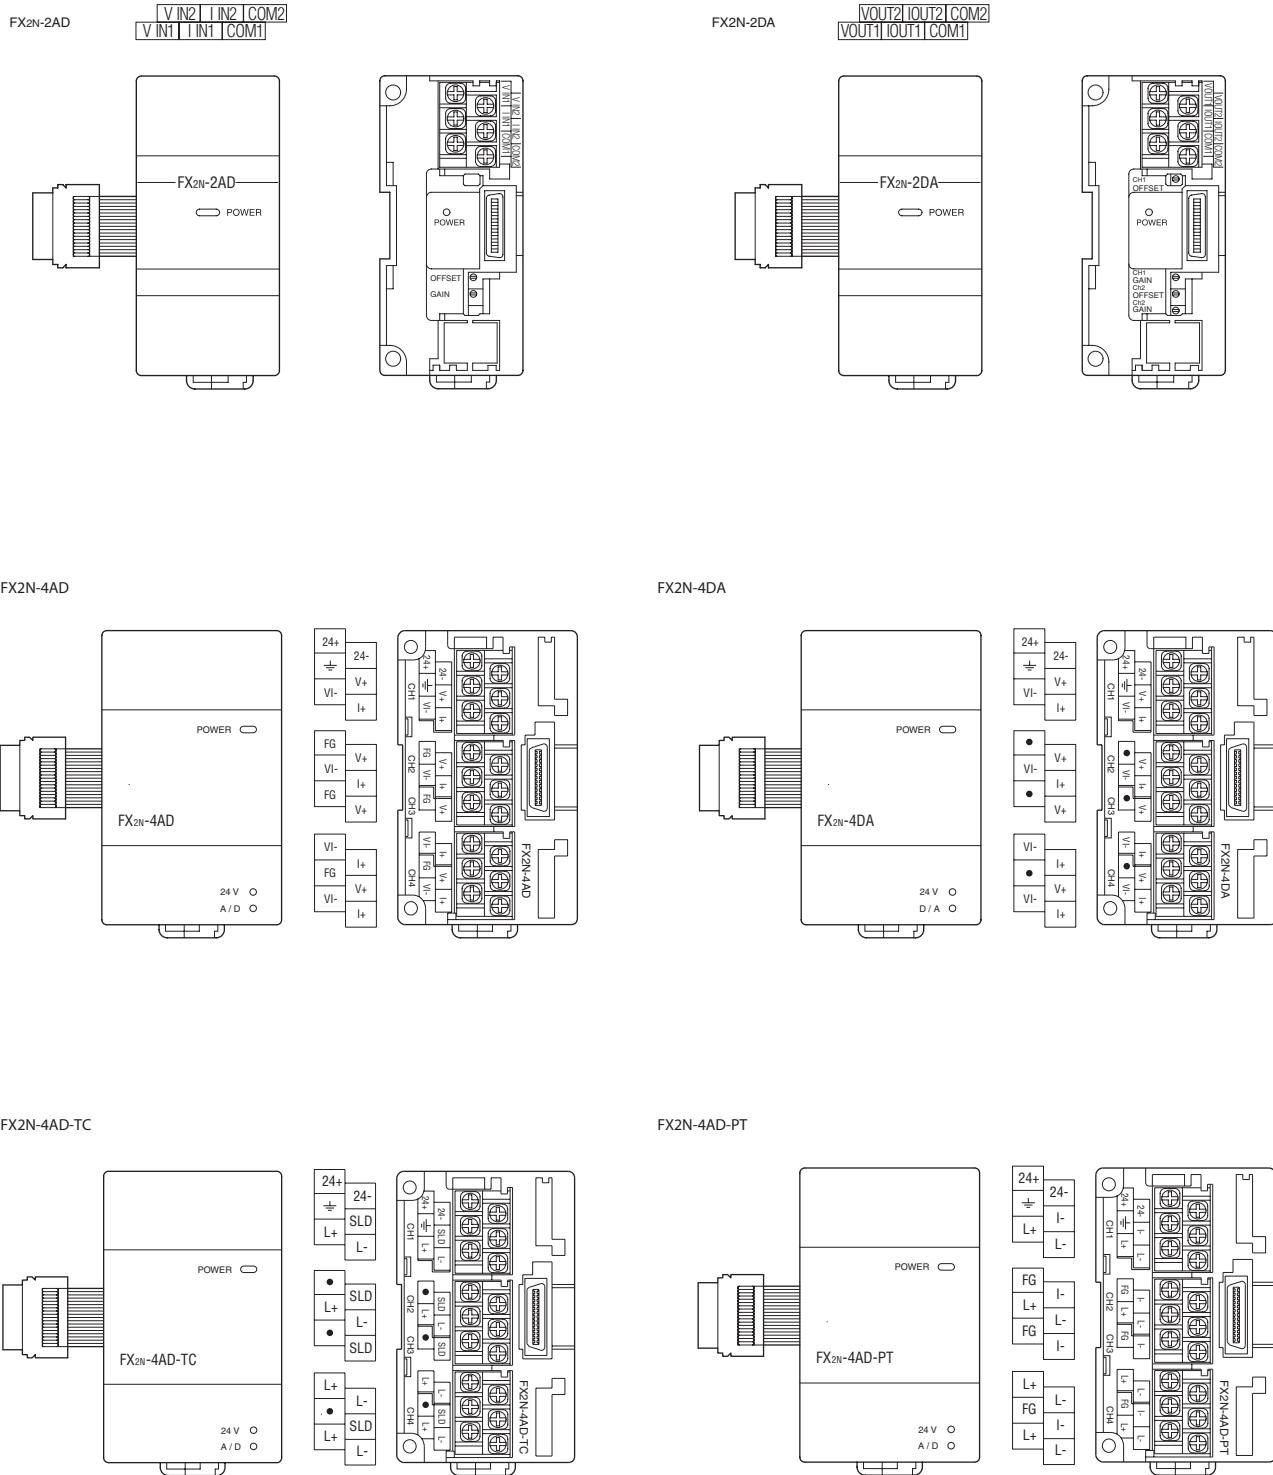


■ Analog Modules MELSEC FXON / FX2N

FXON-3A

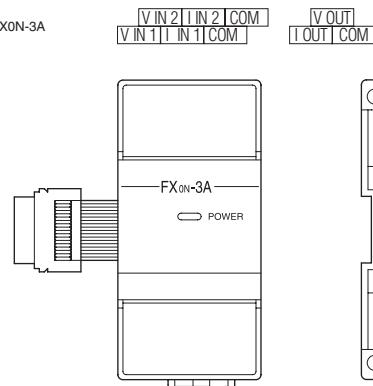


FX2N-8AD

24+	V1+	I1+	COM1	V3+	I3+	COM3	•
24-	V4-	I2+	COM2	V4+	I4+	COM4	

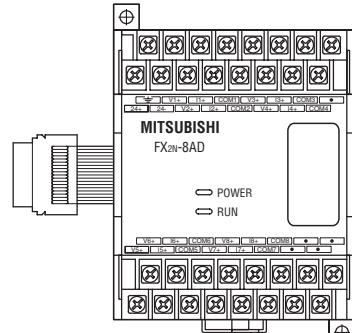


V6+	I6+	COM6	V8+	I8+	COM8	•	•
V5+	I5+	COM5	V7+	I7+	COM7	•	•

FX2N-5A

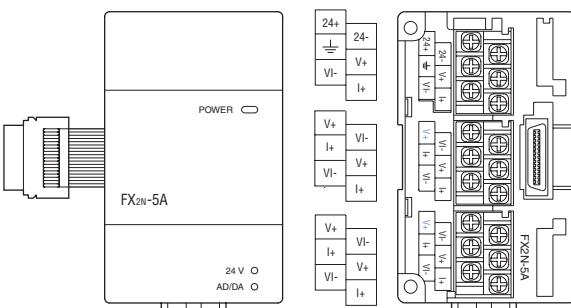


■ Analog Adapter Boards MELSEC FX1N

FX1N-1DA-BD




FX1N-2AD-BD



## ■ Network Modules MELSEC FX0N / FX2N


BASICS

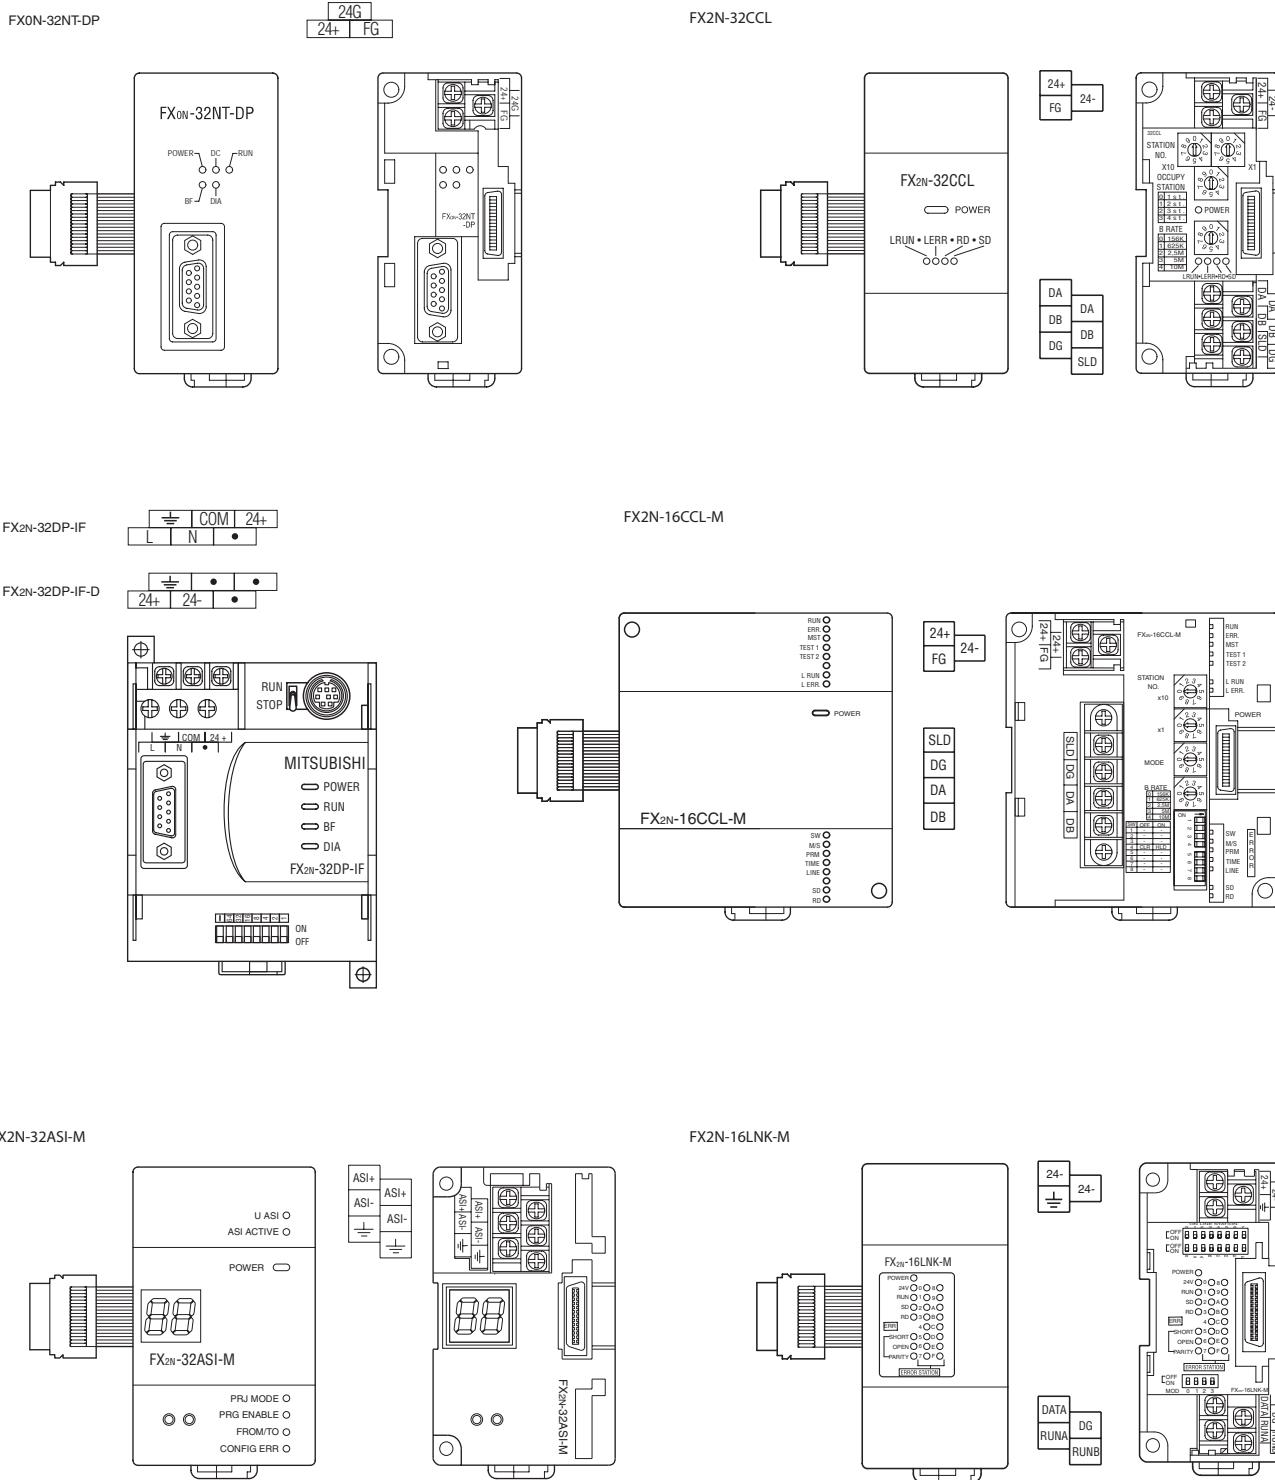



■ Network Modules MELSEC FX2N




FX2N-32CAN

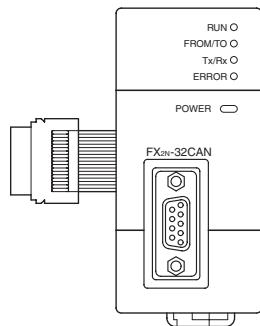


COM-ET10-T

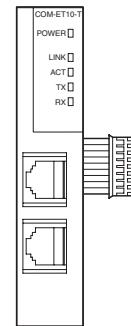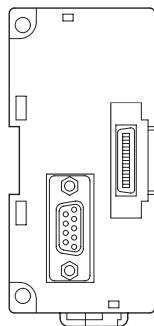


FX2N-64DP-M

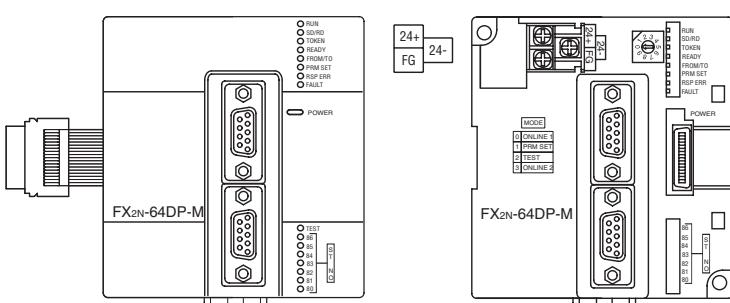


FX2N-64DNET

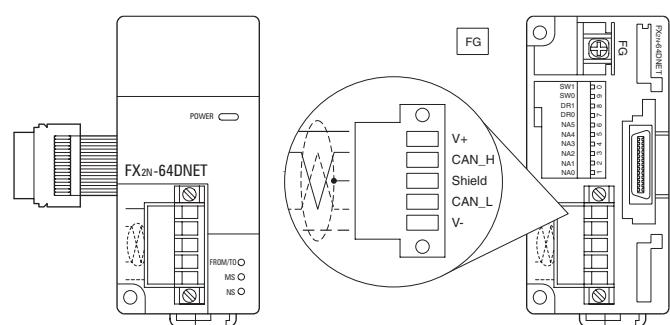


## ■ Communications Modules MELSEC FXOn / FX2N

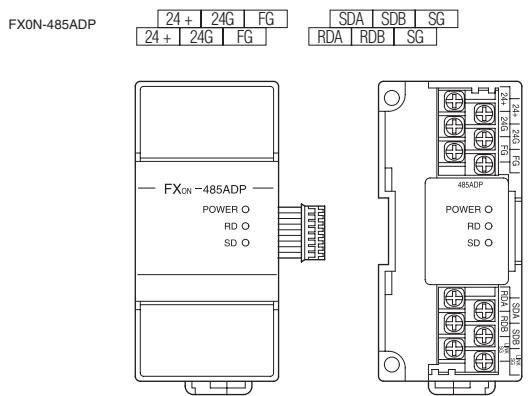

FXON-232ADP                                    FX2N-232IF                                      24+ | 24-

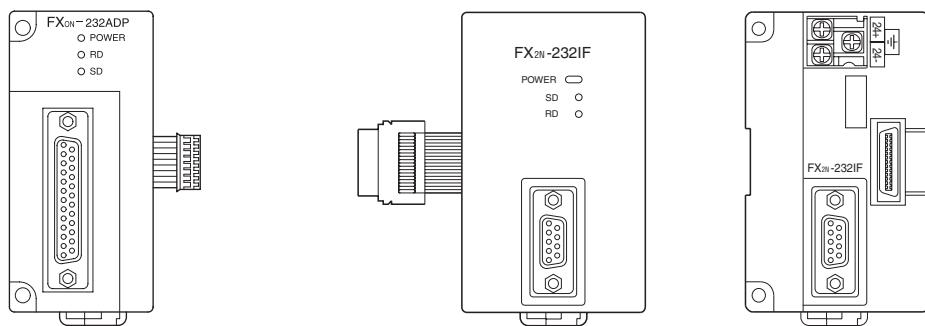


## ■ Interface Module MELSEC FX2NC

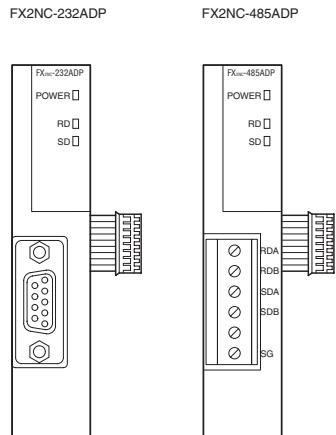


## ■ Special Function Modules MELSEC FX0N / FX1N / FX2N




FX2N-1PG

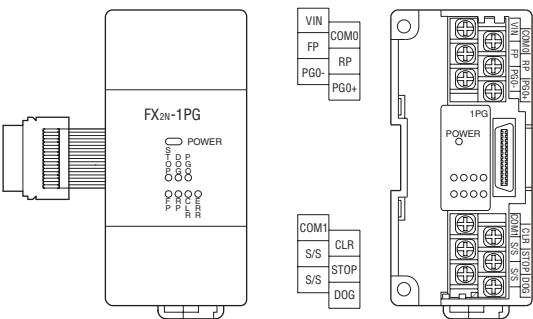


FX2N-10PG

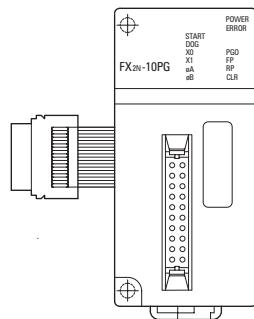


FX2N-2LC

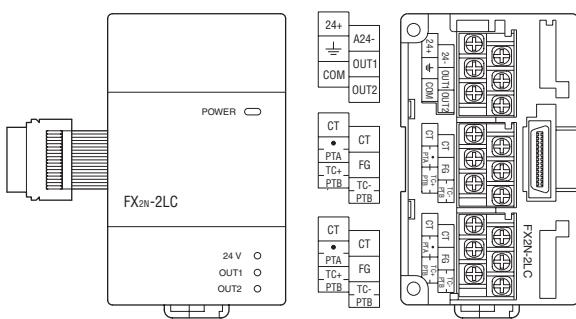


FX2N-1HC

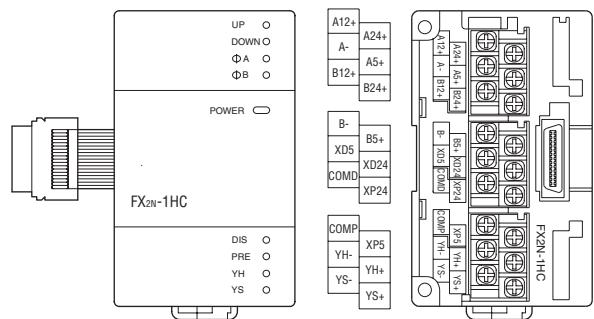

FX2N-10GM


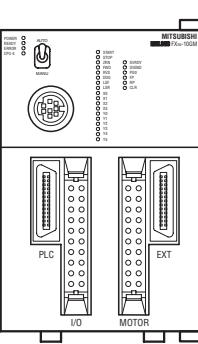


FX2N-20GM

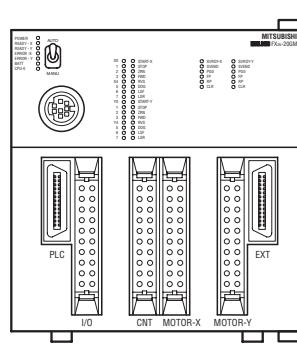



	CON1	Y Axis	CON2	X Axis	CON3	X Axis	CON4	Y Axis
COM1	Y00 Y01 Y02 Y03 Y04 Y05 Y06 Y07	○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○	X00 X01 X02 X03 X04 X05 X06 X07 COM1	START STOP ZRN FWD RVS DOG LSF LSR	○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ COM1	START STOP ZRN FWD RVS DOG LSF LSR	SVRDY COM2 CLR COM3 FP VIN VIN COM5 ST1	SVEND COM2 PG0 COM4 RP VIN VIN COM5 ST2

## Dimensions of Base Units FX1N

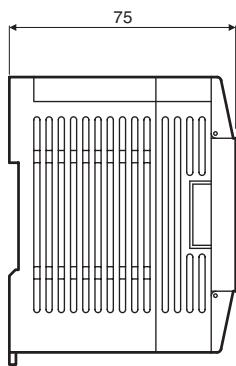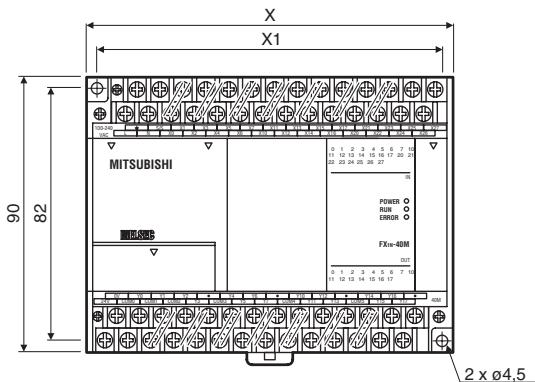


Type	X (in mm)
FX1N-14MR	90
FX1N-14MT	90
FX1N-24MR	90
FX1N-24MT	90
FX1N-40MR	130
FX1N-40MT	130
FX1N-60MR	175
FX1N-60MT	175

## Dimensions of Compact Extension Units FXON

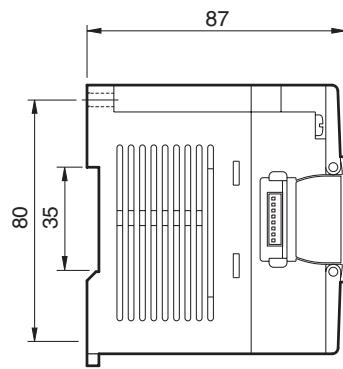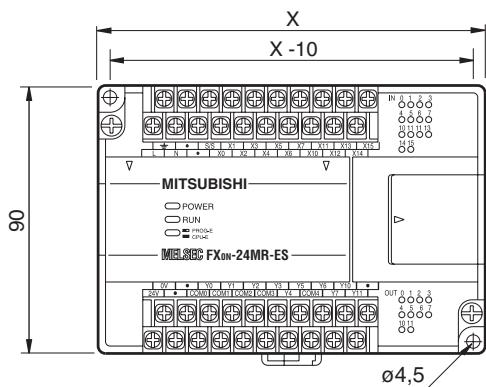


Type	X (in mm)
FXON-40ER-DS	150
FXON-40ER-ES/UL	150
FXON-40ET-DSS	150

## Dimensions of Modular Extension Units and Special Function Modules MELSEC FXOn

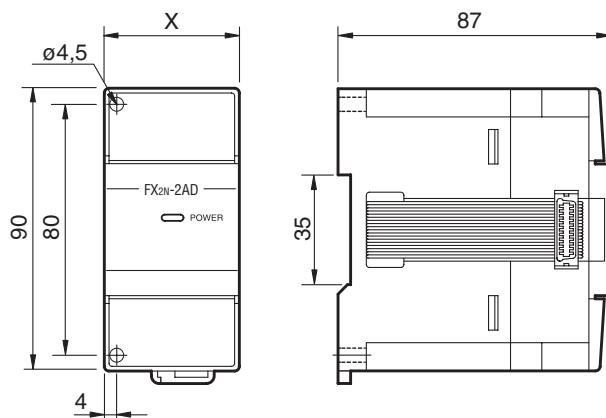

Type	X (in mm)
FXON-8ER-ES/UL	43
FXON-8EX-ES/UL	43
FXON-8YR-ES/UL	43
FXON-8YT-ESS/UL	43
FXON-16EX-ES/UL	70
FXON-16EYR-ES/UL	70
FXON-16EYT-ES/UL	70
FXON-232ADP	43
FXON-3A	43
FXON-32NT-DP	43
FXON-485ADP	43


### Dimensions of Base Units MELSEC FX2N

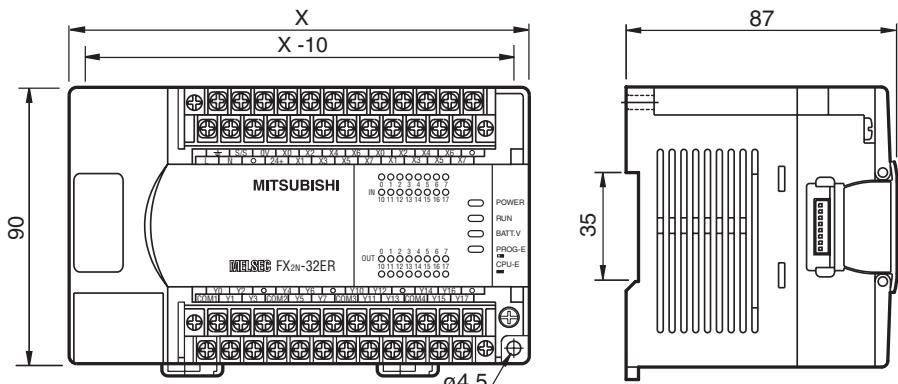

#### Base Units

Type	X (in mm)
FX2N-16M	130
FX2N-32M	150
FX2N-48M	182
FX2N-64M	220
FX2N-80M	285
FX2N-128M	350

### Dimensions of Compact and Modular Extension Units MELSEC FX2N

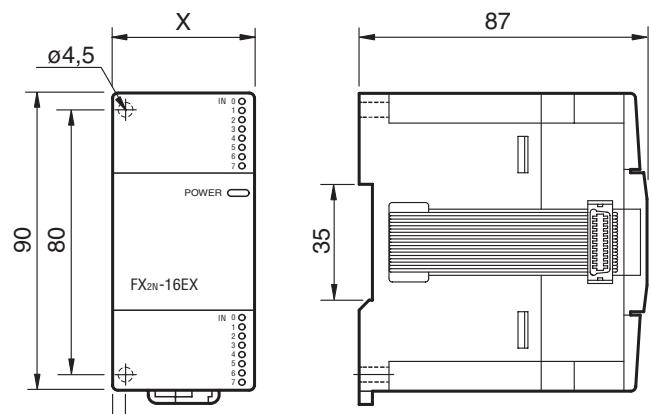


#### Compact Extension Units

Type	X (in mm)
FX2N-32ER-ES/UL	150
FX2N-32ET-ESS/UL	150
FX2N-48ER-DS	182
FX2N-48ER-ES/UL	182
FX2N-48ET-DSS	182
FX2N-48ET-ESS/UL	182


#### Modular Extension Units

Type	X (in mm)
FX2N-16EX-ES/UL	40
FX2N-16EYR-ES/UL	40
FX2N-16EYT-ESS/UL	40

### Dimensions of Extension Adapter Boards FX1N



## Dimensions of Base Units FX2NC

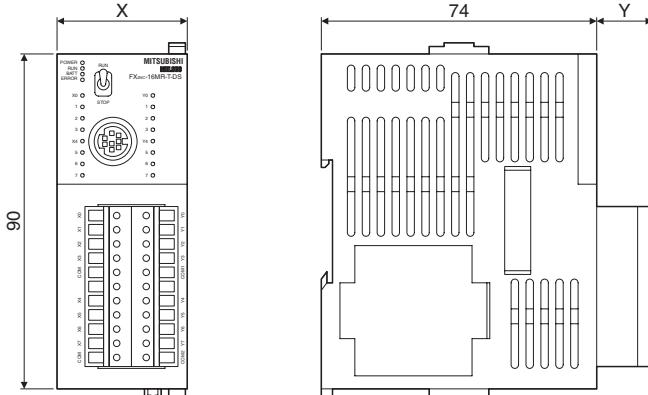


### Base Units

Type	X	Y
FX2NC-16MT-DSS	35	13
FX2NC-16MR-T-DS	35	15
FX2NC-32MT-DSS	35	13
FX2NC-64MT-DSS	60	13
FX2NC-96MT-DSS	86	13

All dimensions in mm

## Dimensions of Modular Extension Units FX2NC

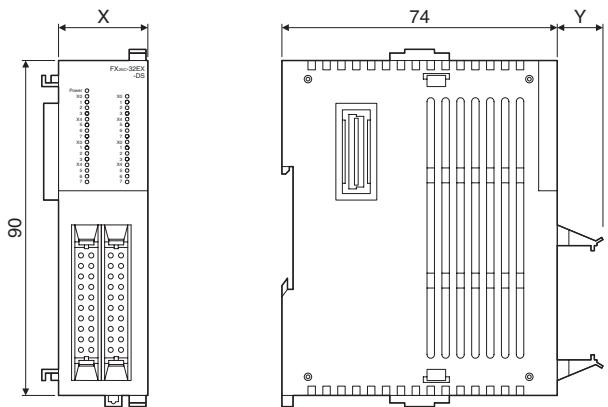


### Extension Units

Type	X	Y
FX2NC-16EX-DS	14.6	13
FX2NC-16EYT-DSS	14.6	13
FX2NC-16EX-T-DS	20.2	15
FX2NC-16EYR-T-DSS	24.2	15
FX2NC-32EX-DS	26.2	13
FX2NC-32EYT-DSS	26.2	13

All dimensions in mm




## Dimensions of Special Function Modules FX2NC

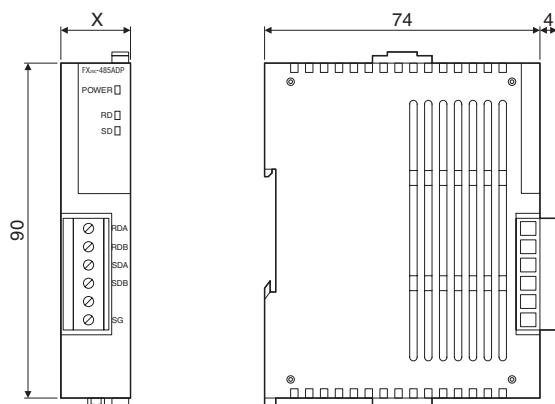

### Special Function Modules







Type	X
FX2NC-4AD	20.2
FX2NC-4DA	20.2
FX2NC-232-ADP	16.1
FX2NC-485-ADP	16.1
FX2NC-CNV-IF	14.6
COM-ET-10-T	16.1

## Dimensions of Special Function Modules MELSEC FX2N

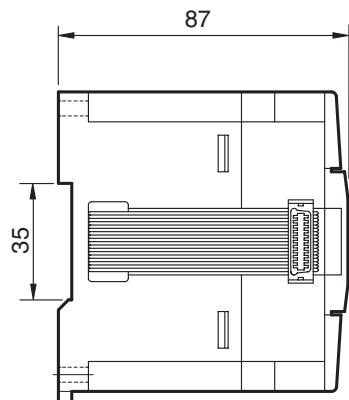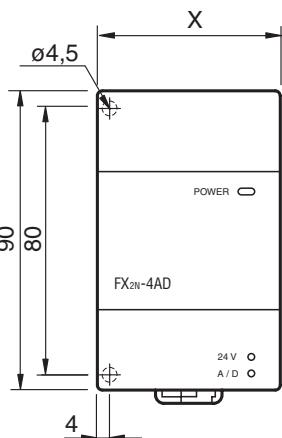


### Special Function Modules FX2N

Type	X (in mm)
FX2N-2DA	43
FX2N-2AD	43
FX2N-4DA	55
FX2N-4AD	55
FX2N-4AD-TC	55
FX2N-4AD-PT	55
FX2N-1HC	55
FX2N-1PG-E	43
FX2N-10PG	43
FX2N-16LNK-M	43
FX2N-2LC	55
FX2N-5A	55
FX2N-232-IF	55
FX2N-32ASI-M	50
FX2N-32CAN	43
FX2N-16CCL-M	85
FX2N-32CCL	43
FX2N-64DNET	43
FX2N-64DP-M	85

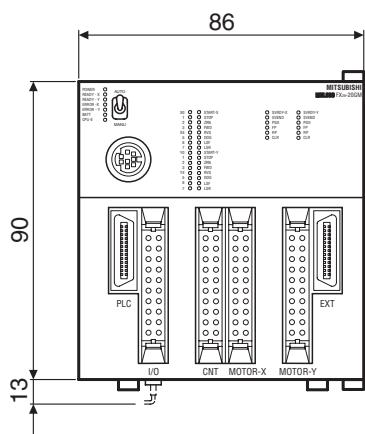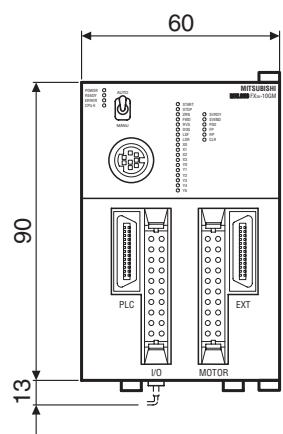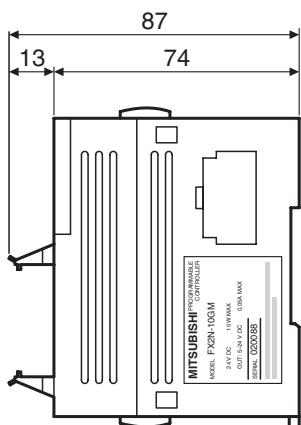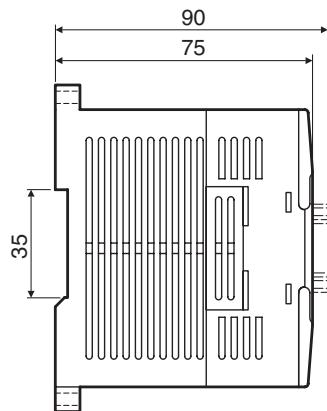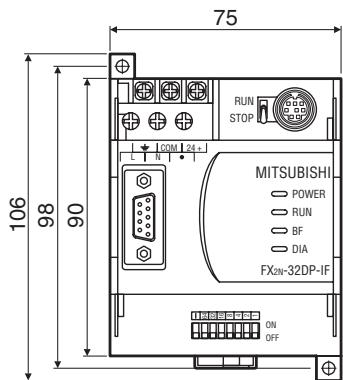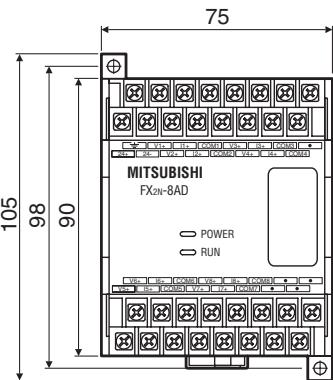


## Dimensions for Accessories


FX-485PC-IF

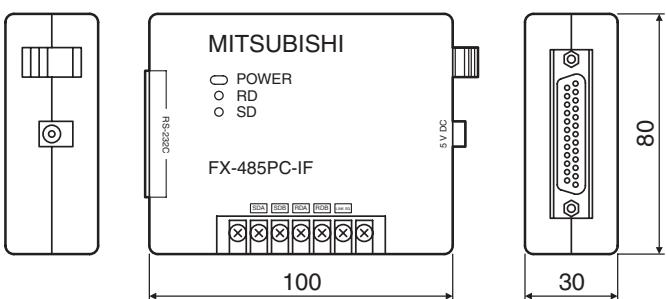


FX1N-EEPROM-8L

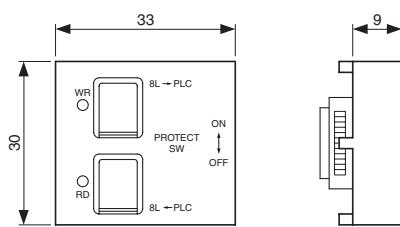


Communication adapter FX1N




Communication adapter FX2N

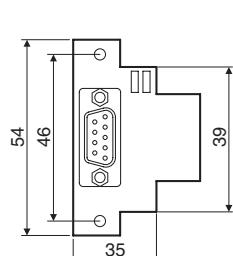



FX1N-5DM

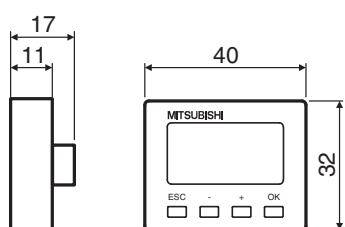



FX2N-10DM-E

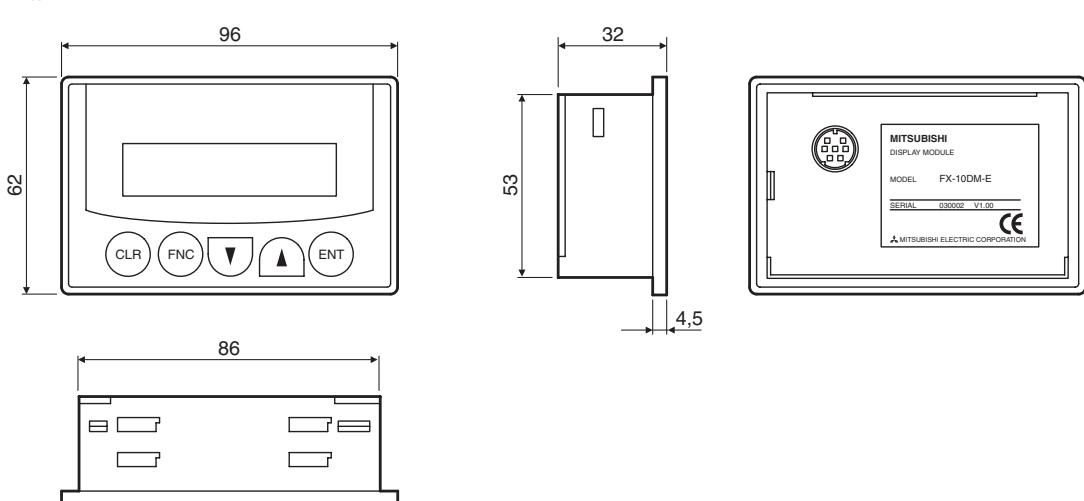



TB-8EX-S

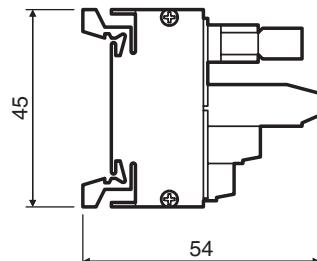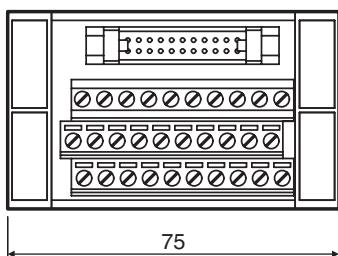



TB-8EX-C

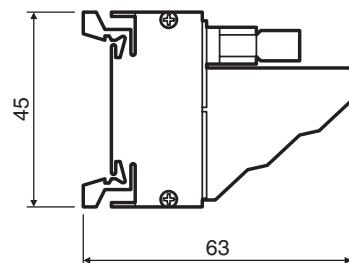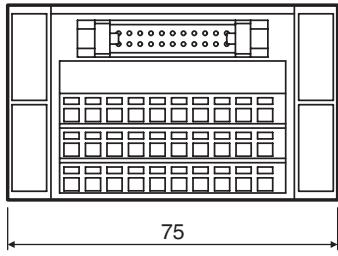



TB-16EX-S

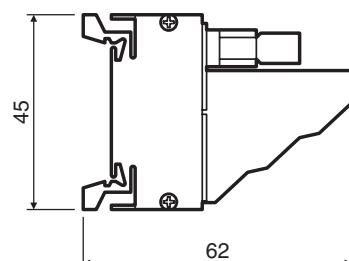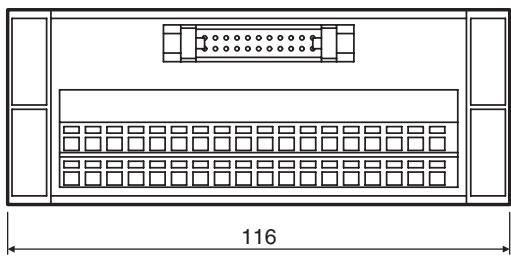



TB-16EX-C

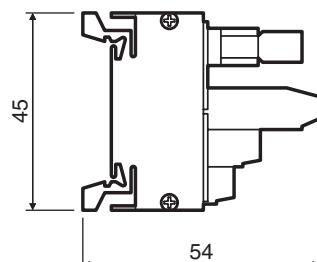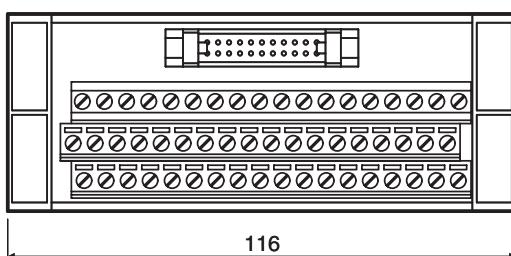

TB-20-S

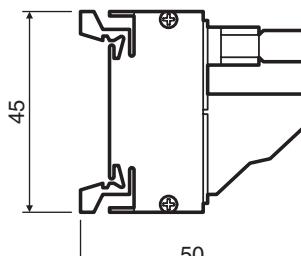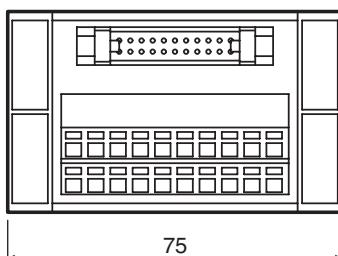

TB-20-C

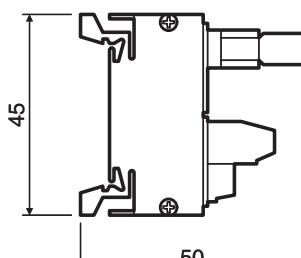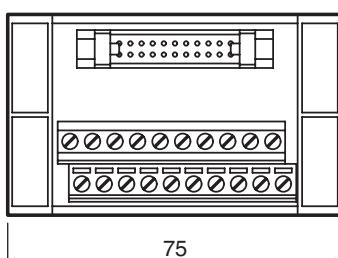

## MELSOFT – Programming and Documentation Software for Standard Personal Computers



With the MELSOFT software family Mitsubishi Electric offers efficient software packages helping to reduce programming and setup times to a high degree. The MELSOFT software family provides instant access, direct communications, compatibility, and open exchange of variables.

The MELSOFT family comprises:

- Programming packages FX-PCS/WIN, GX Developer and GX IEC Developer
- Network configuration software like for example GX Configurator DP
- Visualization software like for example MX SCADA
- Software for a dynamic data exchange like MX Change
- Various development software for operator terminals (please refer to the HMI Technical Catalogue )


FX-PCS/WIN is recommended as a cost-effective beginners package for the FX family. This package offers a quick and easy introduction to programming.

GX Developer FX is the right decision for a universal programming package. If additionally to the FX family the programming of the A/Q series should be included, the GX Developer is the right choice.

For structured programming the IEC1131.3 (EN 61131-3) conform programming software GX IEC Developer is recommended.

For detailed information please order our separate MELSOFT brochure.

### ■ FX-TRN-BEG-E Training Software

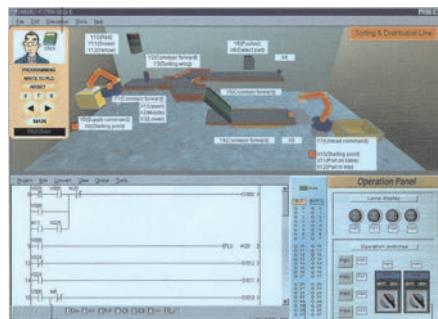


The FX-TRN-BEG-E training software package is designed to help beginners get started with the programming of PLC systems. It combines a simulated PLC environment with expert tutorials. You can start your training as soon as you have installed the software. A real-time module simulates the operation of the PLC program. Simulation speed is adjustable and you can also access system elements and display program status while the process is running.

A personal training assistant guides you through the individual lessons and as you progress you can change the difficulty level from Beginner to Expert. The package runs under Windows 95/98/ME and Windows NT/2000.

Software	FX-TRN-BEG-E
Series	Whole FX family
Language	English
Disk type	CD ROM

**Order information** Art. no. 149714

### ■ FX-PCS/WIN-E

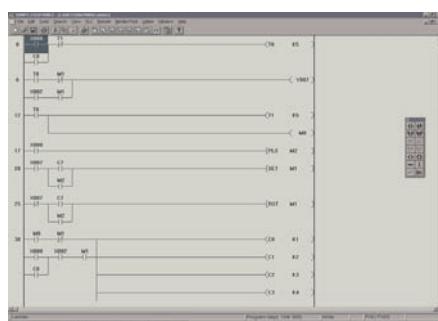

FX-PCS/WIN is the standard programming software for the MELSEC FX family and combines all functions of the former version MELSEC MEDOC with the user guidance of Microsoft Windows®.

FX-PCS/WIN provides the user with facilities for structured programming, function modules and many different diagnostic functions.

This software possesses all Windows-specific benefits and is especially geared to the new FX series.

The software is supplied with or without an SC-09 programming cable, which can be ordered separately. This cable is needed for the connection between the PLC and a serial interface of a personal computer.

FX-PCS/WIN can be run under Windows 3.11/95/98/ME and NT/2000.

Software	FX-PCS/WIN-E V0320-1LOC-M
Series	Whole FX family
Language	English, German, French, Italian, Spanish (multilingual)
Disk type	CD ROM
Included accessories	SC-09 programming cable (3 m)

**Order information** Art. no. 139785


—

—

—

## PLC Programming Software

### GX Developer

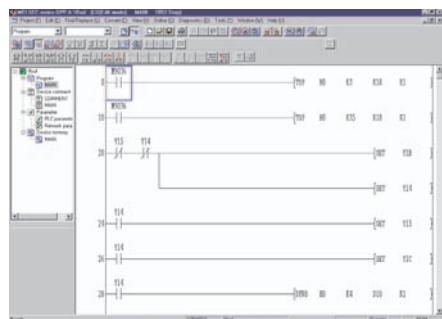

**GX Developer** is the standard programming software for all MELSEC PLC series and combines all functions of MELSEC MEDOC with the user guidance of Microsoft Windows.

With this software you can comfortably create PLC programs alternatively in the form of Ladder Diagrams or Instruction Lists. Both forms of representation can be toggled easily during operation.

Besides efficient monitoring and diagnostics functions GX Developer features an offline simulation of any PLC type.

With GX Developer all MELSEC PLCs from the FX1s to the Q25PH (Q series) are supported.

The GX Developer FX is limited to the programming of the FX series.


This software provides all the Windows-specific advantages and is especially suited to all MELSEC PLCs.

The software is supplied without an SC-09 programming cable, which can be ordered separately. This cable is needed for the connection between the PLC and a serial interface of a personal computer.

GX Developer can be run under MS Windows® 95/98/2000 and NT4.

Software	GX Developer FX V0800-1LOC-G	GX Developer FX V0800-1LOC-E	GX Developer V0800-1LOC-G	GX Developer V0800-1LOC-E
Series	FX1s, FX1N, FX2N, FX2NC	FX1s, FX1N, FX2N, FX2NC	All MELSEC PLCs	All MELSEC PLCs
Language	German	English	German	English
Disk type	CD ROM	CD ROM	CD ROM	CD ROM
<b>Order information</b>	Art. no. 152848	152863	152816	150420
<b>Accessory</b>	Programming cable SC-09, art. no.: 43393			

### GX IEC Developer

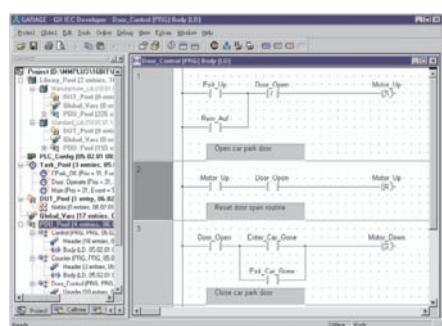

GX IEC Developer provides all functions of the pre-mentioned programs and in addition meets the programming standard: IEC 1131.3 (EN 61131). This makes the software ready for the programming standard of the future and offers beside the FX version in addition the full version as a basis for the on-leading programming of the MELSEC AnS/QnAS series, the MELSEC AnU/QnA series and MELSEC System Q


GX IEC Developer can be run under Windows 95/98 and Windows NT/2000/XP.

The software is supplied without an SC-09 programming cable, which can be ordered separately. This cable is needed for the connection between the PLC and a serial interface of a personal computer.

Software	GX IEC Developer FX V0600-1LOC-G	GX IEC Developer FX V0600-1LOC-E	GX IEC Developer V0600-1LOC-G	GX IEC Developer V0600-1LOC-E
Series	FX1s, FX1N, FX2N, FX2NC	FX1s, FX1N, FX2N, FX2NC	All MELSEC PLCs	All MELSEC PLCs
Language	German	English	German	English
Disk type	CD ROM	CD ROM	CD ROM	CD ROM
<b>Order information</b>	Art. no. 152551	152562	152483	152536
<b>Accessory</b>	Programming cable SC-09, art. no.: 43393			

## Profibus Networks Software

### GX Configurator DP

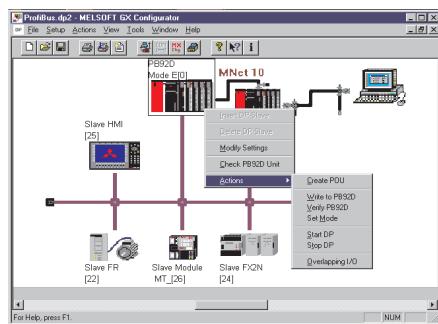

The GX Configurator DP is a user friendly configurations software for the open network PROFIBUS/DP.

The software package is a 32 bit application and runs under Windows 95/98 and Windows NT4/2000. Configuration of all PROFIBUS/DP modules for the MELSEC Ans/QnAS and A/Q series and also the FX family is possible.


Due to the supported extended user parameters of a GSD file, easy parameter setting of PROFIBUS/DP slave devices is possible even for third-party devices.

The new GX Configurator DP enables the download of all configuration data via an overriding network.

All PROFIBUS modules are configured via the backside bus.

Software	<b>GX Configurator DP V0500-1LOC-E</b>
Supported PROFIBUS/DP master modules for the Mitsubishi MELSEC series	A1SJ71PB92D, AJ71PB92D, QJ71PB92D
Language	English / German
Disk type	CD ROM
<b>Order information</b>	Art. no. 145312
<b>Accessory</b>	Programming cable SC-09, art. no.: 43393

### GX Monitor DP

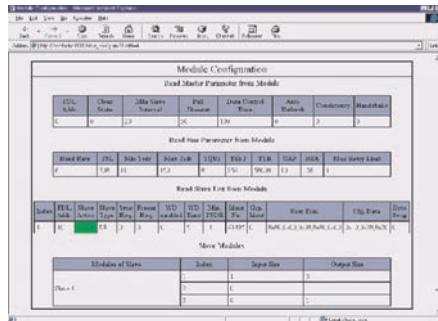


With the new GX Monitor DP Software it is possible to make Diagnostics in graphical or text for PROFIBUS/DP networks and PLC via Internet.

With the use of the standard Internet Explorer® it is quite simple to use and easy to run on different PC platforms.

This software can be used independent or in combination with GX Configurator DP.

Software	<b>GX Monitor DP V0100-1LOC-E</b>
Supported PROFIBUS/DP master modules for the Mitsubishi MELSEC series	A1SJ71PB92D, AJ71PB92D, QJ71PB92D, QJ71PB93D
Language	English
Disk type	CD ROM
<b>Order information</b>	Art. no. 143971
<b>Accessory</b>	Programming cable SC-09, art. no.: 43393

### PROFIBUS Master Simulator

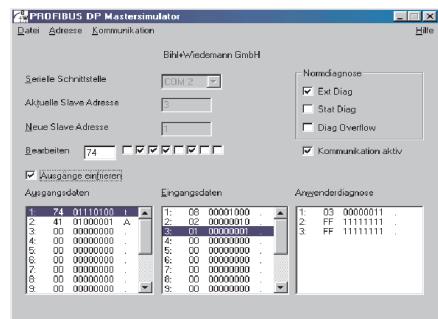

The PROFIBUS/DP Master Simulator is an easy to use and versatile utility for the specifications exchange with PROFIBUS/DP slaves. For this purpose the PROFIBUS/DP Master Simulator is capable of exchanging the specifications with many slaves even without a GSD file, a type file, and a PROFIBUS/DP master.

Without further input or additional files PROFIBUS/DP slaves can be started using their base I/O range.


Input specifications can be read and output specifications can be written. Furthermore, the PROFIBUS/DP Master Simulator

obviously supports GSD files as well as entering particular configurations for starting the specifications exchange with PROFIBUS/DP slaves. Addressing is supported either. The PROFIBUS/DP Master Simulator provides an option to scan the entire PROFIBUS/DP for connected participants and display them graphically.

The PROFIBUS/DP Master Simulator is a development of the company Bihl & Wiedemann GmbH ([www.bihl-wiedemann.de](http://www.bihl-wiedemann.de)) and is not distributed by Mitsubishi Electric.

## Visualization Software and Software for Dynamic Data Exchange

### ■ MX Change

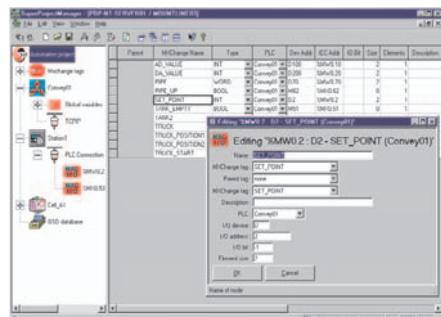


MX Change is integrated in the MELSOFT family as the "heart of automation". The software package consists of a Server and a Super Project Manager, other automation programs can be connected to. Since MX Change operates across a network, any variable once declared can be used by all other systems connected to the database.

Through this method following the principle "define once and use anywhere" the development time can even be decreased drastically.

The software runs under Windows 95/98 and Windows NT/2000.

Software	MX Change V0220-1LOC-E	MX Change 2000T V0220-1LOC-E
Language	English	English
Executable tags	2.000	
Disk type	CD ROM	CD ROM
<b>Order information</b>	Art. no. 146559	146561

### ■ MX OPC Server

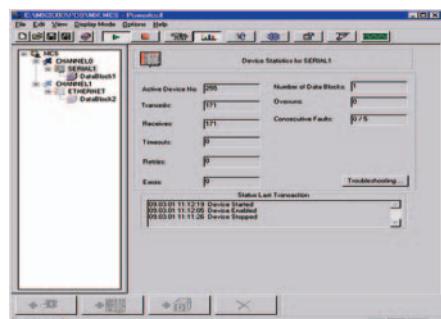

The OPC standard was developed for manufacturer independent communications between processes and Microsoft Windows® applications in client/server architecture.


OPC means "OLE for Process Control" and represents an application of the Microsoft DCOM technology (Distributed Component Object Model). In contrast to Active-X the OPC based data exchange especially features a higher performance.

The MX OPC server is a standardized software interface that enables Microsoft Windows® applications to access a Mitsubishi PLC quick and easily.

The software runs under Windows 95/98 and Windows NT/2000.

Software	MX OPC Server V0301-1LOC-E
Series	All MELSEC PLCs
Language	English
Disk type	CD ROM
<b>Order information</b>	Art. no. 152233

## ■ MX Components

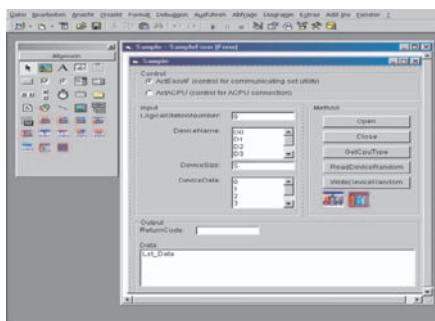

This software provides you with powerful Active-X elements. An internal driver manages the complete communications between your Microsoft Windows application and your process. Via MX components and a programming language (e.g. Visual Basic, Visual C++, etc.) you can easily create your own PC applications or integrate existing PC applications.


Moreover, via MX Components and VBA the complete MS Office range is at your service. Without high effort you can integrate online process data of a Mitsubishi PLC in your existing office software (e.g. MS Access or MS Excel etc.).

The software runs under MS Windows® 95/98/NT/2000/XP.

Software	MX Components V0300-1LOC-E
Series	All MELSEC PLCs
Language	English
Disk type	CD ROM

Order information Art. no. 145309

## ■ MX4 SCADA and MX4 HMI

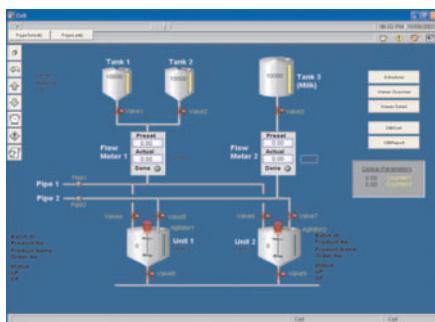

MX4 SCADA is a process visualisation system that can handle everything from simple installations to complex production control systems. The software package can administer an almost unlimited objects.

MX4 HMI is designed for small applications where there is no need for an extensive networked solution. However, if the application expands then it is easy to upgrade to MX4 SCADA.


Also included with MX4 SCADA/MX4 HMI is FastLinx, a communication and data exchange tool that make set-up simple and directly links MX4 to GX IEC Developer to ensure consistent use of PLC devices.

The software runs under MS Windows® 95/98/NT4/2000 and XP and is available in a variety of different versions geared to the objects to be handled.

Software	Development version	Run-time version
Applicable PLC series	All MELSEC PLCs	All MELSEC PLCs
Software language	English	English
Disk type	CD ROM	CD ROM

Order information Art. no. On request On request

## ■ Hand-Held Programming Unit FX-10 P-E and FX-20 P-E-SET0

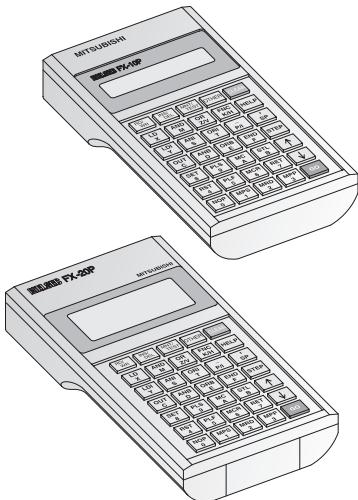


These small hand-held programming units designed for industry have a user-friendly keyboard and a clearly laid out, back-lit LC display. On both programming units, the MELSEC FX family is programmed in the list of instructions.

The FX-20 P-E-SET0 has an integrated CMOS-RAM with capacitor buffering. This ensures storage of the PLC program and its duplication, for example for series machines.

Specifications	FX-10 P-E	FX-20 P-E-SET0
General specifications	Conforms to base units FX1S, FX1N, FX2N, FX2NC	
Ambient temperature	0 – 40 °C	0 – 40 °C
Ambient relative humidity (non-condensing)	35 – 85 %	35 – 85 %
Power supply	DC 5 ±5 % via PLC	DC 5 ±5 % via PLC
Current consumption	mA	120
Display	LCD	LCD (with backlight)
Character display	16 x 2	16 x 4
Connectable PLC	FX1S, FX1N, FX2N, FX2NC	FX1S, FX1N, FX2N, FX2NC
Keyboard	35	35
Memory	—	8,000 steps PLC-program
Data security	—	Data is safed up to 3 days by capacitor.
Cable	—	FX-20P-CABO
Weight	kg	0.25
Dimensions (W x H x D)	mm	85 x 160 x 27
<b>Order information</b>		Art. no.
136931		149109

## ■ Programming Cable SC-09

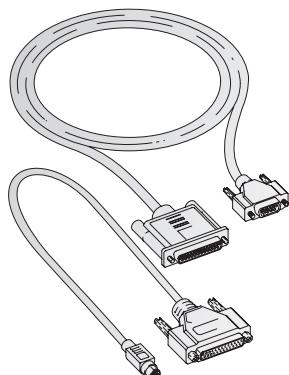


The SC-09 programming cable is used for the connection between the PLC and a serial interface of a personal computer.

The cable is divided into 2 parts and thus universally applicable for all Mitsubishi PLCs.

SC-09

Order information Art. no. 43393

## ■ Connection Cable

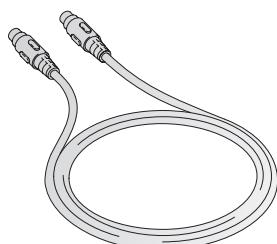


With the connection cable FX-20P-CAB0 the peripheral units with 8-pin Mini-DIN connector are connected to units of the FX1S, FX1N, FX2N or FX2NC series.

Specifications	FX-20P-CAB0
Cable type	Connection cable
Length	cm 300
For connecting to controller	FX1S, FX1N, FX2N

Order information Art. no. 55917

## ■ EPROM Writer FX-20 P-RWM

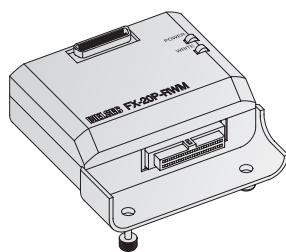

The EPROM writer FX-20 P-RWM is plugged directly into the hand-held programming unit FX-20 P-E-SET0. It is used for transferring the PLC programs of the MELSEC FX controller to the EPROM memory cassette FX-EPROM-8.

Conversely, existing programs can be read from the FX-EPROM-8 memory cassette into the CMOS-RAM of the MELSEC FX controller and program comparisons carried out.

FX-20 P-RWM

Order information Art. no. 23818

## ORDER FORM

<b>MITSUBISHI ELECTRIC EUROPE B.V.</b> Industrial Automation / German Branch Gothaer Str. 8 D-40880 Ratingen  Fax: +49 2102 486-7170		Company: ..... Department: ..... Street: ..... Address: ..... Phone: ..... Fax: .....			
<b>Order declaration</b>					
Pos.	Number	Item (type)	Article number	Description	Remarks

Notes when ordering:

When ordering, please use only the type designations and article numbers shown in this catalogue.

Analog adapter.....	41	FX1N-422BD.....	50
Analog modules.....	42	FX1N-485BD.....	69
Base units (specifications)		FX1N-CNV-BD .....	71
FX1S series .....	12	FX1N-EEPROM-8L.....	15
FX1N series .....	28	FX1S-10MR-DS .....	12
FX2N series .....	30	FX1S-10MR-ES/UL .....	12
FX2NC series.....	33	FX1S-10MT-DSS .....	12
Batteries .....	72	FX1S-10MT-ESS/UL .....	12
Connection cables .....	76, 105	FX1S-14MR-DS .....	12
COM-ET10-T.....	52	FX1S-14MR-ES/UL .....	12
Combination possibilities .....	23	FX1S-14MT-DSS .....	12
CR01-R2/R4 SET .....	70	FX1S-14MT-ESS/UL .....	12
CR01-R4/R4 .....	70	FX1S-20MR-DS .....	13
Dimensions		FX1S-20MR-ES/UL .....	13
FX1S series .....	17	FX1S-20MT-DSS .....	13
FX0N series.....	93	FX1S-20MT-ESS/UL .....	13
FX1N series .....	93	FX1S-30MR-DS .....	13
FX2N series.....	94	FX1S-30MR-ES/UL .....	13
FX2NC series.....	95	FX1S-30MT-DSS .....	13
special function modules.....	96	FX1S-30MT-ESS/UL .....	13
accessories .....	97	FX2N-1HC.....	47
Digitale inputs/outputs .....	34	FX2N-1PG-E .....	47
Display module .....	14, 73	FX2N-2AD.....	43
EPROM loader.....	105	FX2N-2DA.....	43
EPROM/EEPROM cassettes.....	15, 72	FX2N-2LC.....	46
Extension units		FX2N-4AD.....	44
compact.....	35	FX2N-4AD-PT.....	46
modular .....	37	FX2N-4AD-TC.....	45
F2-40BL .....	72	FX2N-5A .....	42
FX-10DM-E.....	73	FX2N-8AD.....	45
FX-10P-E/FX20P-E .....	104	FX2N-8AV-BD .....	41
FX-20P-RWM .....	105	FX2N-10GM .....	48
FX-485PC-IF .....	70	FX2N-10PG.....	47
FX0N-3A .....	42	FX2N-20GM .....	48
FX0N-8ER-ES/UL .....	37	FX2N-16CCL-M .....	61
FX0N-8EX-ES/UL .....	37	FX2N-16EX-ES/UL .....	38
FX0N-8EYR-ES/UL .....	37	FX2N-16EYR-ES/UL .....	38
FX0N-8EYT-ESS/UL .....	37	FX2N-16LNK-M .....	59
FX0N-16EX-ES/UL .....	37	FX2N-16MR-DS .....	30
FX0N-16EYR-ES/UL .....	37	FX2N-16MR-ES/UL .....	30
FX0N-16EYT-ESS/UL .....	37	FX2N-16MT-DSS .....	30
FX0N-32NT-DP .....	54	FX2N-16MT-ESS/UL .....	30
FX0N-40ER-ES/UL .....	35	FX2N-32ASI-M.....	57
FX0N-40ER-DS.....	35	FX2N-32CAN .....	67
FX0N-40ET-DSS.....	35	FX2N-32CCL.....	62
FX0N-65EC .....	74	FX2N-32DP-IF .....	55
FX0N-232ADP .....	49	FX2N-32DP-IF-D .....	55
FX0N-485ADP .....	69	FX2N-32ER-ES/UL .....	36
FX1N-1DA-BD .....	42	FX2N-32ET-ESS/UL .....	36
FX1N-2AD-BD .....	41	FX2N-32MR-DS .....	30
FX1N-2EYT-BD.....	40	FX2N-32MR-ES/UL .....	30
FX1N-4EX-BD.....	40	FX2N-32MT-DSS .....	30
FX1N-5DM-E.....	14, 73	FX2N-32MT-ESS/UL .....	30
FX1N-8AV-BD .....	41	FX2N-48ER-DS .....	36
FX1N-14MR-DS .....	28	FX2N-48ER-ES/UL .....	36
FX1N-14MR-ES/UL .....	28	FX2N-48ET-DSS .....	36
FX1N-14MT-DSS .....	28	FX2N-48ET-ESS/UL .....	36
FX1N-14MT-ESS/UL .....	28	FX2N-48MR-DS .....	31
FX1N-24MR-DS .....	28	FX2N-48MR-ES/UL .....	31
FX1N-24MR-ES/UL .....	28	FX2N-48MT-DSS .....	31
FX1N-24MT-DSS .....	28	FX2N-48MT-ESS/UL .....	31
FX1N-24MT-ESS/UL .....	28	FX2N-64DNET .....	65
FX1N-40MR-DS .....	29	FX2N-64MR-DS .....	31
FX1N-40MR-ES/UL .....	29	FX2N-64MR-ES/UL .....	31
FX1N-40MT-DSS .....	29	FX2N-64MT-DSS .....	31
FX1N-40MT-ESS/UL .....	29	FX2N-64MT-ESS/UL .....	31
FX1N-60MR-DS .....	29	FX2N-80MR-DS .....	32
FX1N-60MR-ES/UL .....	29	FX2N-80MR-ES/UL .....	32
FX1N-60MT-DSS .....	29	FX2N-80MT-DSS .....	32
FX1N-60MT-ESS/UL .....	29	FX2N-80MT-ESS/UL .....	32
FX1N-232BD.....	50	FX2N-128MR-ES/UL .....	32
		FX2N-128MT-ESS/UL .....	32
		FX2N-232BD.....	50
		FX2N-232F.....	49

HEADQUARTERS	EUROPEAN REPRESENTATIVES	EUROPEAN REPRESENTATIVES	EURASIAN REPRESENTATIVE
MITSUBISHI ELECTRIC EUROPE B.V. German Branch Gothaer Straße 8 <b>D-40880 Ratingen</b> Phone: +49 (0) 2102 / 486-0 Fax: +49 (0) 2102 / 486-1120 e mail: megfamail@meg.mee.com	EUROPE GEVA Wiener Straße 89 <b>AT-2500 Baden</b> Phone: +43 (0) 2252 / 85 55 20 Fax: +43 (0) 2252 / 488 60 e mail: office@geva.at	AUSTRIA TEHNIKON Oktjabrskaya 16/5, Ap 704 <b>BY-220030 Minsk</b> Phone: +375 (0)17 / 22 75 704 Fax: +375 (0)17 / 22 76 669 e mail: tehnikon@belsonet.net	LITHUANIA UAB UTU POWEL Savanorių pr. 187 <b>LT-2053 Vilnius</b> Phone: +370 (0) 52323-101 Fax: +370 (0) 52322-980 e mail: powel@utu.lt
MITSUBISHI ELECTRIC EUROPE B.V. French Branch 25, Boulevard des Bouvets <b>F-92741 Nanterre Cedex</b> Phone: +33 1 55 68 55 68 Fax: +33 1 55 68 56 85 e mail: factory.automation@framee.com	BELARUS Getronics b.v. Control Systems Pontbeeklaan 43 <b>NL-1731 Asse-Zellik</b> Phone: +32 (0) 2 / 467 17 51 Fax: +32 (0) 2 / 467 17 45 e mail: info.automation@getronics.com	BELGIUM TELECON CO. 4, A. Ljapchev Blvd. <b>BG-1756 Sofia</b> Phone: +359 (0) 2 / 97 44 05 8 Fax: +359 (0) 2 / 97 44 06 1 e mail: —	NETHERLANDS Getronics b.v. Control Systems Donauweg 2 B <b>NL-1043 AJ Amsterdam</b> Phone: +31 (0) 20 / 587 67 00 Fax: +31 (0) 20 / 587 68 39 e mail: info.gia@getronics.com
MITSUBISHI ELECTRIC IRELAND EUROPE B.V. Irish Branch Westgate Business Park, Ballymount <b>IRL-Dublin 24</b> Phone: +353 (0) 1 / 419 88 00 Fax: +353 (0) 1 / 419 88 90 e mail: sales.info@meir.mee.com	ITALY INEA CR d.o.o. Drvinje 63 <b>HR-10000 Zagreb</b> Phone: +385 (0) 1 / 36 67 140 Fax: +385 (0) 1 / 36 67 140 e mail: —	BULGARIA AutoCont Control Systems s.r.o. Nemocniční 12 <b>CZ-702 00 Ostrava 2</b> Phone: +420 59 / 6152 111 Fax: +420 59 / 6152 562 e mail: consys@autocont.cz	NORWAY Beijer Electronics AS Teglverksveien 1 <b>NL-3002 Drammen</b> Phone: +47 (0) 32 / 24 30 00 Fax: +47 (0) 32 / 84 85 77 e mail: info@beijer.no
MITSUBISHI ELECTRIC EUROPE B.V. Italian Branch Via Paracelso 12 <b>I-20041 Agrate Brianza (MI)</b> Phone: +39 039 6053 1 Fax: +39 039 6053 312 e mail: factory.automation@it.mee.com	SPAIN INEA CR d.o.o. Drvinje 63 <b>HR-10000 Zagreb</b> Phone: +385 (0) 1 / 36 67 140 Fax: +385 (0) 1 / 36 67 140 e mail: —	CROATIA MPL Technology Sp. z o.o. ul. Sliczna 36 <b>PL-31-444 Kraków</b> Phone: +48 (0) 12 / 632 28 85 Fax: +48 (0) 12 / 632 47 82 e mail: krakow@mpl.pl	POLAND Sirius Trading & Services srl Str. Biharia No. 67-77 <b>RO-013981 Bucuresti 1</b> Phone: +40 (0) 21 / 201 1146 Fax: +40 (0) 21 / 201 1148 e mail: sirius@siriustrading.ro
MITSUBISHI ELECTRIC EUROPE B.V. UK Branch Travellers Lane <b>GB-Hatfield Herts. AL10 8 XB</b> Phone: +44 (0) 1707 / 27 61 00 Fax: +44 (0) 1707 / 27 86 95 e mail: automation@meuk.mee.com	UK louis poulsen industri & automation Geminejvej 32 <b>DK-2670 Greve</b> Phone: +45 (0) 70 / 10 15 35 Fax: +45 (0) 43 / 95 95 91 e mail: lpia@lpmail.com	DENMARK UTU Elektrotehnika AS Pärnu mnt.160i <b>EE-11317 Tallinn</b> Phone: +372 (0) 6 / 51 72 80 Fax: +372 (0) 6 / 51 72 88 e mail: utu@utu.ee	ESTONIA Beijer Electronics AB Box 426 <b>S-2012 Malmö</b> Phone: +46 (0) 40 / 35 86 00 Fax: +46 (0) 40 / 35 86 02 e mail: info@beijer.se
MITSUBISHI ELECTRIC JAPAN CORPORATION Office Tower "Z" 14 F 8-12, chome, Harumi Chuo-Ku <b>Tokyo 104-6212</b> Phone: +81 3 6221 6060 Fax: +81 3 6221 6075	FINLAND Ansatis 6a <b>FIN-01740 Vantaa</b> Phone: +358 (0) 9 / 886 77 500 Fax: +358 (0) 9 / 886 77 555 e mail: info@beijer.fi	FINLAND UTECO A.B.E.E. 5, Mavrogenous Str. <b>GR-18542 Piraeus</b> Phone: +302 (0) 10 / 42 10 050 Fax: +302 (0) 10 / 42 12 033 e mail: sales@uteco.gr	SWITZERLAND ECONOTEC AG Postfach 282 <b>CH-8309 Nürensdorf</b> Phone: +41 (0) 1 / 838 48 11 Fax: +41 (0) 1 / 838 48 12 e mail: info@econotec.ch
MITSUBISHI ELECTRIC AUTOMATION 500 Corporate Woods Parkway <b>Vernon Hills, IL 60061</b> Phone: +1 847 / 478 21 00 Fax: +1 847 / 478 22 83	HUNGARY Meltrade Automatika Kft. 55, Harmat St. <b>HU-1105 Budapest</b> Phone: +36 (0)1 / 2605 602 Fax: +36 (0)1 / 2605 602 e mail: office@meltrade.hu	HUNGARY SIA POWEL Lieenes iela 28 <b>LV-1009 Riga</b> Phone: +371 784 / 22 80 Fax: +371 784 / 22 81 e mail: utu@utu.lv	TURKEY GTS Darülaceze Cad. No. 43 Kat. 2 <b>TR-80270 Okmeydani-Istanbul</b> Phone: +90 (0) 212 / 320 1640 Fax: +90 (0) 212 / 320 1649 e mail: gts@turk.net
ILan & Gavish Ltd. Automation Service 24 Shenkar St., Kiryat Arie <b>IL-49001 Petah-Tiqva</b> Phone: +972 (0) 3 / 922 18 24 Fax: +972 (0) 3 / 924 07 61 e mail: iandg@internet-zahav.net	ISRAEL TEXEL Electronics Ltd. Box 6272 <b>IL-42160 Netanya</b> Phone: +972 (0) 9 / 863 08 91 Fax: +972 (0) 9 / 885 24 30 e mail: texel_me@netvision.net.il	ISRAEL SIA POWEL Lieenes iela 28 <b>LV-1009 Riga</b> Phone: +371 784 / 22 80 Fax: +371 784 / 22 81 e mail: utu@utu.lv	UKRAINE CSC Automation Ltd. 15, M. Raskova St., Fl. 10, Office 1010 <b>UA-02002 Kiev</b> Phone: +380 (0) 44 / 238-83-16 Fax: +380 (0) 44 / 238-83-17 e mail: csc-a@csc-a.kiev.ua
<b>MIDDLE EAST REPRESENTATIVE</b>			
Ilan & Gavish Ltd. Automation Service 24 Shenkar St., Kiryat Arie <b>IL-49001 Petah-Tiqva</b> Phone: +972 (0) 3 / 922 18 24 Fax: +972 (0) 3 / 924 07 61 e mail: iandg@internet-zahav.net	ISRAEL SIA POWEL Lieenes iela 28 <b>LV-1009 Riga</b> Phone: +371 784 / 22 80 Fax: +371 784 / 22 81 e mail: utu@utu.lv		
<b>AFRICAN REPRESENTATIVE</b>			
CBI Ltd. Private Bag 2016 <b>ZA-1600 Isando</b> Phone: +27 (0) 11 / 928 2000 Fax: +27 (0) 11 / 392 2354 e mail: cbi@cbi.co.za			SOUTH AFRICA