


Low Voltage
Switchgear
Magnetic
Contactors
Thermal
Overload Relays
Contactor Relays



MS-N

Switching, Protecting, Controlling

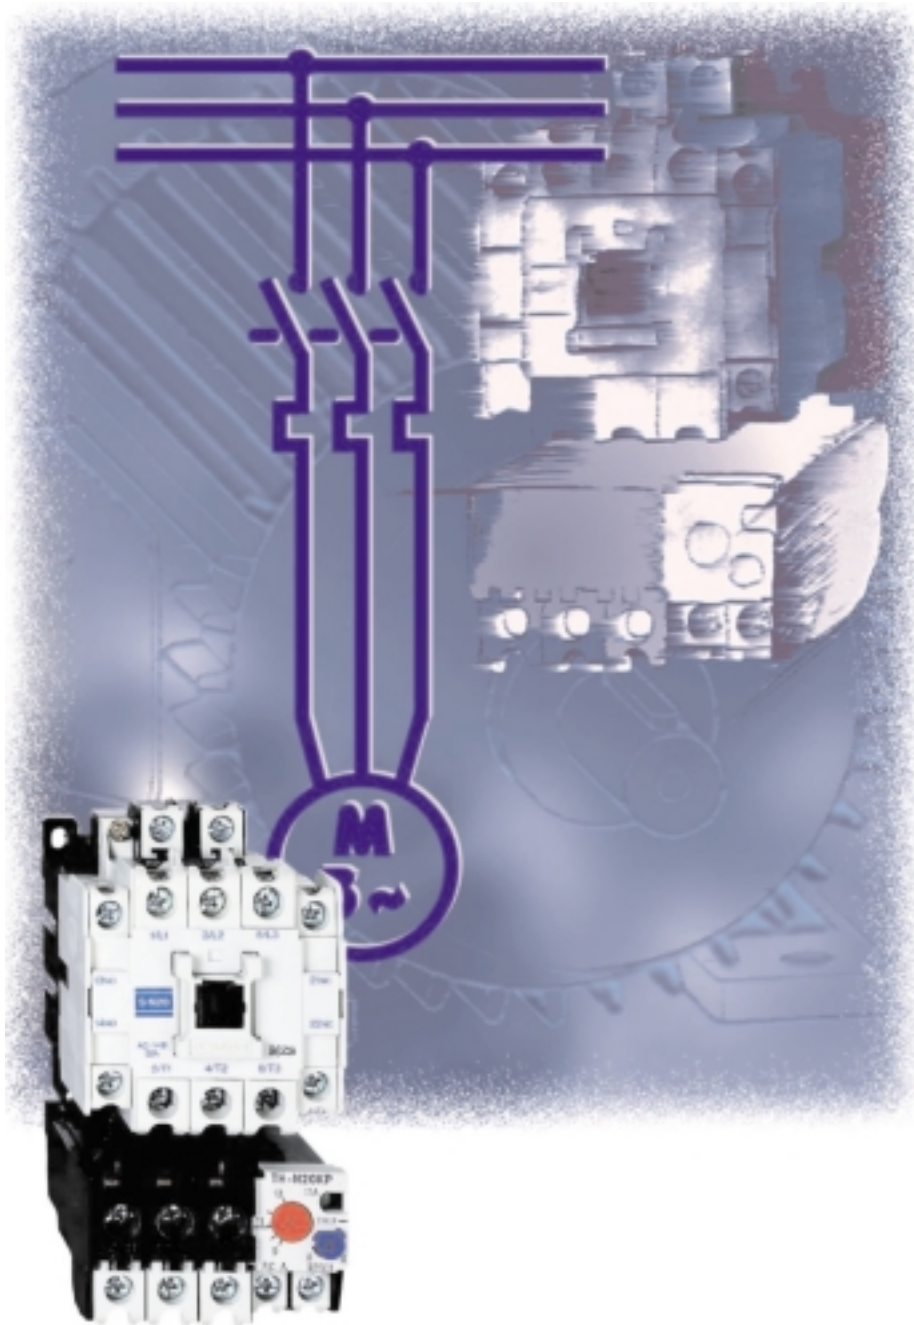

Compact, modular extensions and an energy-saving design – these are the main requirements set by user of contactors and auxiliary contactors.

Requirements that the MS-N series from Mitsubishi Electric fulfils.

Designed with ease of use in mind

DIN-rail mounting with unified terminal distances



Even more powerful

With our MS-N series we are offering components for low-voltage switchgear in the areas of

switches, protectors and controls.


These components cover the increasing requirements that are made on the world market.

The MS-N series replaces the proven MS-K series with :

- **Magnetic contactors**
- S-N, SD-N series
- **Thermal overload relays**
- TH-N series
- **Contactors relays**
- SR-N, SRD-N series

Reduced size and low coil consumption

The dimensions of the power contactors, their space occupied in assemblies and their coil consumption are up to 25 % lower than with similar types.



Simple to inspect


A visual check of the circuit contacts, all can be done by removing the front cover. You can check the installation after assembly.

The new contacts have led to a considerable improvement of the life and reliability of the auxiliary contacts.

Improvement of electromagnet

Using a spiral kick-out spring improves the motional balance of moving parts, reduce bouncing, lengthen core life and generally stabilize core movement.


Efficient electromagnet has been achieved by modern engineering of electromagnetic analysis with a computer. The contactor capable of withstanding voltage drops of up to 35 % (at closing of contact).

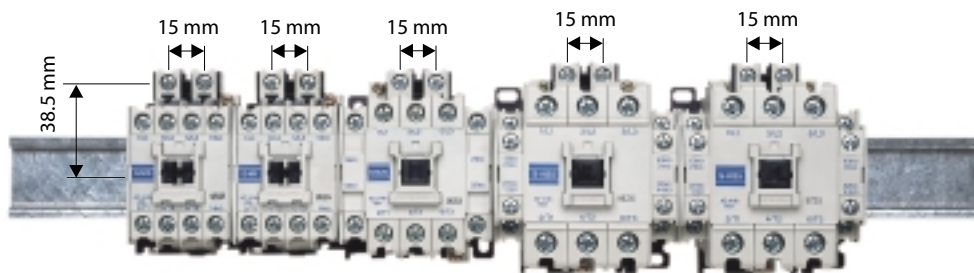

Easy mounting and wiring

MS-N new series contactors, starters and relays can all be mounted on DIN rail (35 mm width). For easy wiring coil terminals of those are arranged on upper side of contactors, moreover distance between center of the rail and the coil terminals are unified to 38.5 mm.

With this new wiring technology, we have designed wiring that is simple and safe for your fingers. Even a line with ring cable sockets can now be assembled fast and without any problems. The clamping screws cannot get lost.

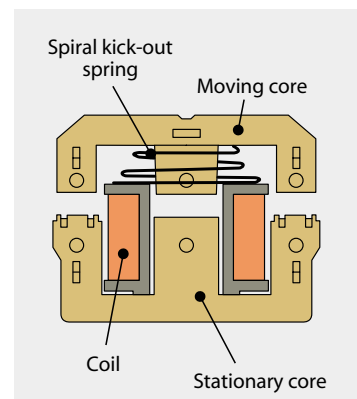



Here are some examples of the accessory that is available for the MS-N series:

- Auxiliary contact blocks for front assembly
- Auxiliary contact blocks for side assembly
- Surge absorbers for coils
- Mechanical interlocks
- Pneumatic timers
- DC interface modules
- Single units for overload relays
- Connecting wire kit for reversing

International standards


For a technological firm with international operations, it is a matter of course that all contactors and accessories comply with all important standards.

See page 7 for further details.

Power contactors with carefully thought out accessories

The accessories

A cleverly compiled programme of accessories ensures use for a very wide range of applications and requirements. Here too, very simple assembly was a key aspect: the accessory is not screwed but plugged in or snapped on.

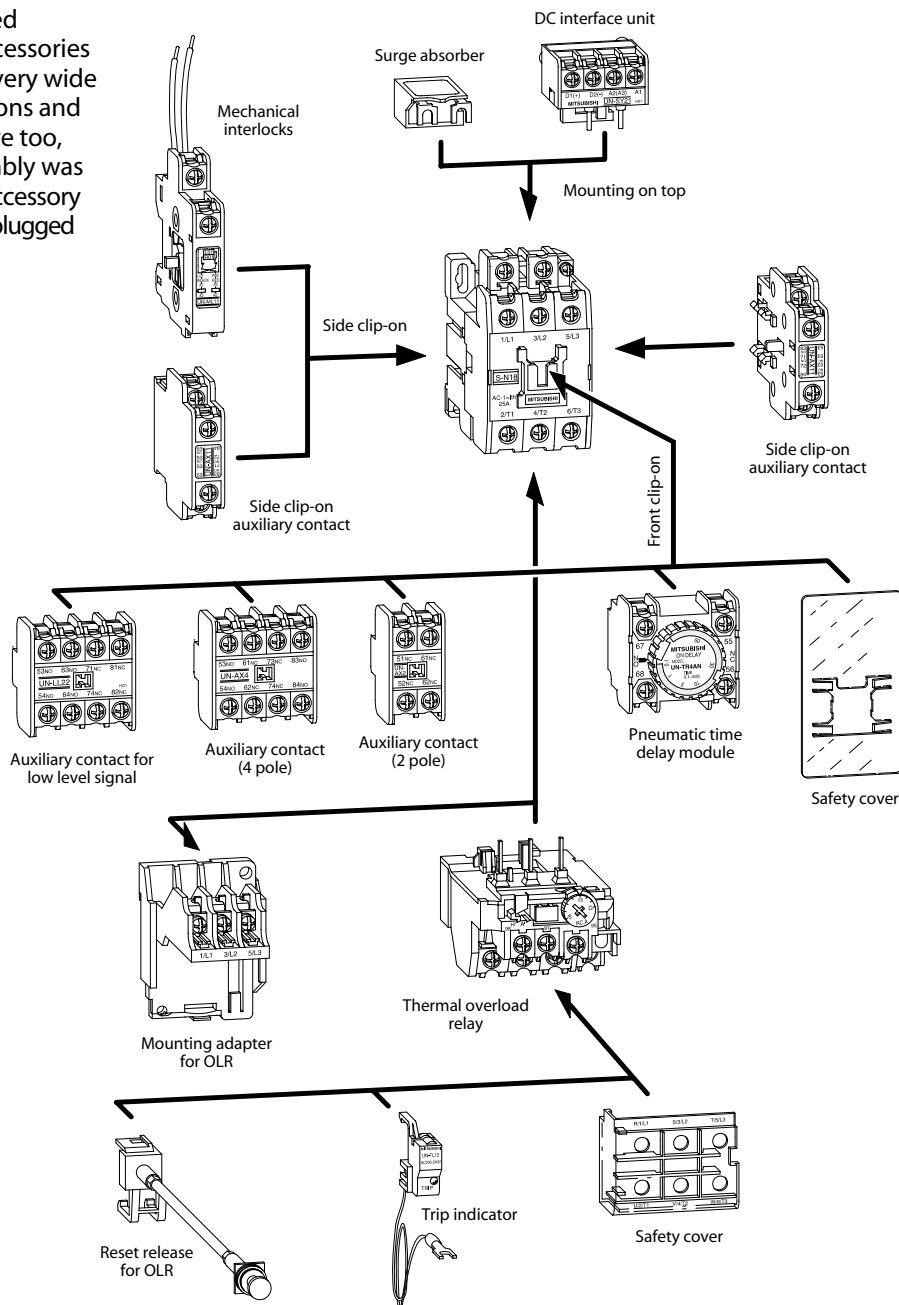


Overview on all accessories

Overview and selection guide

Three-phase motor ratings IEC category AC3 for Contactors

Contactor	AC-operated	S-N10CX	S-N11CX	S-N12CX	S-N18CX	S-N20CX	S-N21CX	S-N25CX	S-N35CX
	DC-operated	—	SD-N11CX	SD-N12CX	—	—	SD-N21CX	—	SD-N35CX
AC 380–440 V	kW	4	5.5	5.5	7.5	11	11	15	18.5
Rated continuous current I_{th}	A	20	20	20	25	32	32	50	60
Auxiliary contacts (integrated)		1 NO or 1 NC	1 NO or 1 NC	1 NO + 1 NC	—	1 NO + 1 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC

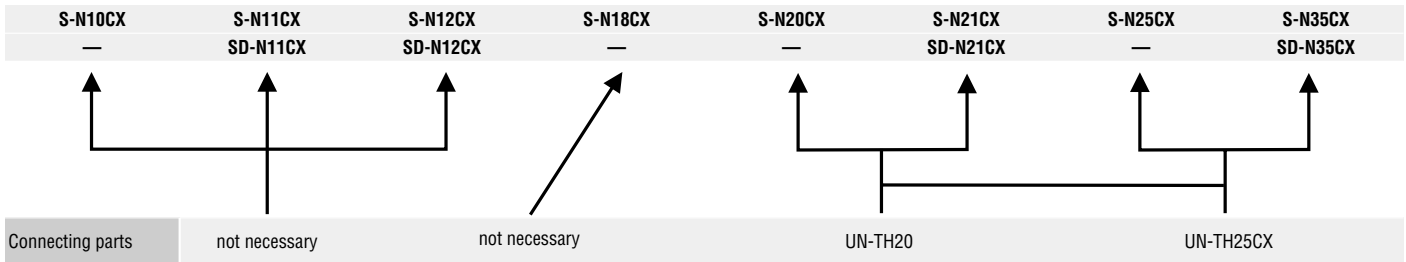

Thermal Overload Relays

Type	TH-N12KPCX	TH-N18KPCX	TH-N20KPCX	TH-N20TAKPCX
Setting range	0.1 – 13 A	1 – 18 A	0.2 – 22 A	18 – 40 A




Contactor Relays

AC-operated type	SR-N4CX 4A	SR-N4CX 3A1B	SR-N4CX 2A2B
Auxiliary contacts	4 NO	3 NO, 1 NC	2 NO, 2 NC



Three-phase motor ratings IEC category AC-3

S-N50CX	S-N65CX	S-N80	S-N95	S-N125	S-N150	S-N180	S-N220	S-N300	S-N400	S-N600	S-N800
SD-N50	SD-N65	SD-N80	SD-N95	SD-N125	SD-N150	—	SD-N220	SD-N300	SD-N400	SD-N600	SD-N800
22	30	45	55	60	75	90	132	160	220	330	440
80	100	135	150	150	200	260	260	350	450	800	1000
2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC	2 NO + 2 NC

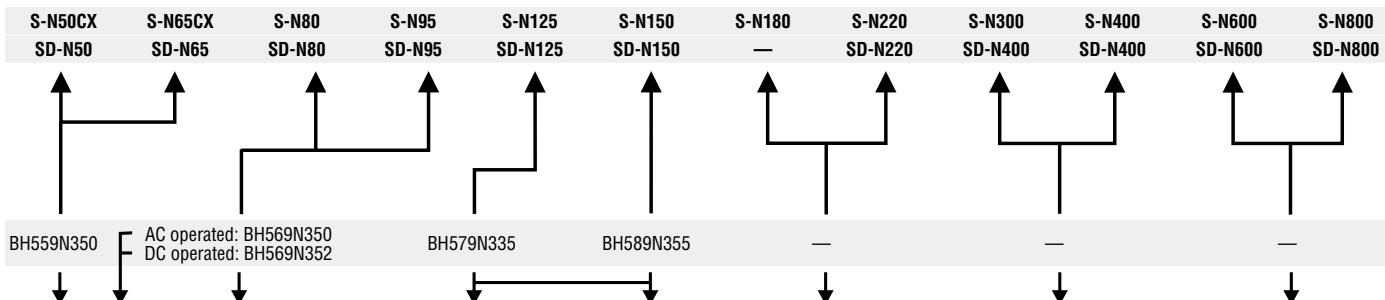

Thermal Overload Relays

TH-N60KPCX	TH-N60TAKP	TH-N120KP	TH-N120TAKP	TH-N220RHKP	TH-N400RHKP	TH-N600KP
12 – 65 A	54 – 105 A	34 – 100 A	85 – 150 A	65 – 250 A	85 – 400 A	200 – 800 A



Contactors Relays

AC operated type	SRD-N4CX 4A	SRD-N4CX 3A1B	SRD-N4CX 2A2B
Auxiliary contacts	4 NO	3 NO, 1 NC	2 NO, 2 NC




A selection of relays for optimum motor protection characteristics

TH-N series thermal overload relays will make convenient and safe systems

Thermal overload relays

The thermal relay range includes phase failure protection models (three-element relays).

This array of protection characteristics allows you to choose the units suited to your motor protection needs.



Benefits:

- An operation indicator makes maintenance and inspection easy.
- 1 NO and 1 NC contact
- Rated current can be set easily
- Finger protection up to TH-N60KPCX
- Trip-free reset bar
- Convenient reset release (optional)

Contactor relays

The Mitsubishi Electric series SR-N contactor relays are specially designed for use in low voltage control circuit applications.



Benefits:

- High reliability: By adopting bifurcated moving contacts and by improving the shape of the contacts, contact performance has been made more reliable than ever.
- Different types as: Standard, high capacity or overlap contact

- Various contact arrangements
- Long life
- Mountable on 35 mm DIN rails
- Dust-proof construction
- Easily visible coil ratings
- Easy wiring (self-rising terminal screws)
- Various accessories common with the series S-N contactors (front and side clip-on type additional auxiliary contact blocks, surge absorbers)
- Finger protected types are available (DIN 57106/VDE 0106 Part 100) (Suffix "CX")

Wide range of coil ratings for all contactors

All Mitsubishi contactors are available in a wide range of different coil ratings for AC or DC use.

AC rated voltage

Rating	Range 50 Hz	Range 60 Hz	Standard
AC 24 V	24	24	●
AC 48 V	48-50	48-50	●
AC 100 V	100	100-110	
AC 120 V	110-120	115-120	●
AC 127 V	125-127	127	
AC 200 V	200	200-220	
AC 220 V	208-220	220	
AC 230 V	220-240	230-240	●
AC 260 V	240-260	260-280	
AC 380 V	346-380	380	
AC 400 V	380-415	400-440	●
AC 440 V	415-440	460-480	
AC 500 V	500	500-550	

For detailed description please refer to the Technical Catalogue.

DC rated voltage






Rating	Range	Standard
DC 12 V	12	
DC 24 V	24	●
DC 48 V	48	
DC 100 V	100	
DC 110 V	110	
DC 125 V	120-125	
DC 200 V	200	
DC 220 V	220	

International Standards

MITSUBISHI magnetic contactors are designed to conform to the relevant IEC recommendations and standards.

Conformity to the following:

- International: IEC947-4-1
- Europe: EN60947-4-1
- Germany: VDE0660
- U.S.A.: NEMA-ICS

Standards					
Symbol	USA / Canada		Marinal approvals		
					

Contactors ★

	UL	RA	U.K.	France	Korea	Japan
S-N10CX	●	●	●	●	●	●
S-N11CX	●	●	●	●	●	●
S-N12CX	●	●	●	●	●	●
S-N18CX	●	●	●	●	●	●
S-N20CX	●	●	●	●	●	●
S-N21CX	●	●	●	●	●	●
S-N25CX	●	●	●	●	●	●
S-N35CX	●	●	●	●	●	●
S-N50CX	○	●	①	●	●	●
S-N65CX	○	●	①	●	●	●
S-N80	○	●	①	●	●	●
S-N95	○	●	①	●	●	●
S-N125	○	●	①	●	●	●
S-N150	○	●	①	●	●	●
S-N180	○	●	①	●	—	●
S-N220	○	●	①	●	●	●
S-N300	○	●	①	●	●	●
S-N400	○	●	①	●	●	●
S-N600	○	●	①	●	—	●
S-N800	○	○	①	●	—	●

Thermal overload relays

	UL	RA	U.K.	France	Korea	Japan
TH-N12KPCX	○	●	●	●	—	—
TH-N18KPCX	○	●	●	●	—	—
TH-N20KPCX	○	●	●	●	—	—
TH-N20TAKPCX	○	●	●	●	—	—
TH-N60KPCX	○	●	①	●	—	—
TH-N60TAKP	○	●	①	●	—	—
TH-N120KP	○	●	①	●	—	—
TH-N120TAKP	○	●	①	●	—	—
TH-N220RHKP	○	●	①	●	—	—
TH-N400RHKP	○	●	①	●	—	—
TH-N600KP	—	—	—	—	—	—

Contactors relays

	UL	RA	U.K.	France	Korea	Japan
SR-N4CX	●	—	●	●	—	—
SRD-N4CX	●	—	●	●	—	—

● Standard model is certified

○ Certified models are available

— Certification not yet applied


① Under application

★ DC contactors on request

Complete Solution for Line and Load Side

Mitsubishi offers the whole line from Air Circuit Breakers over Low Voltage Switch-gears to Magnetic Contactors and Thermal Overload Relays.

The complete solution for all needs.

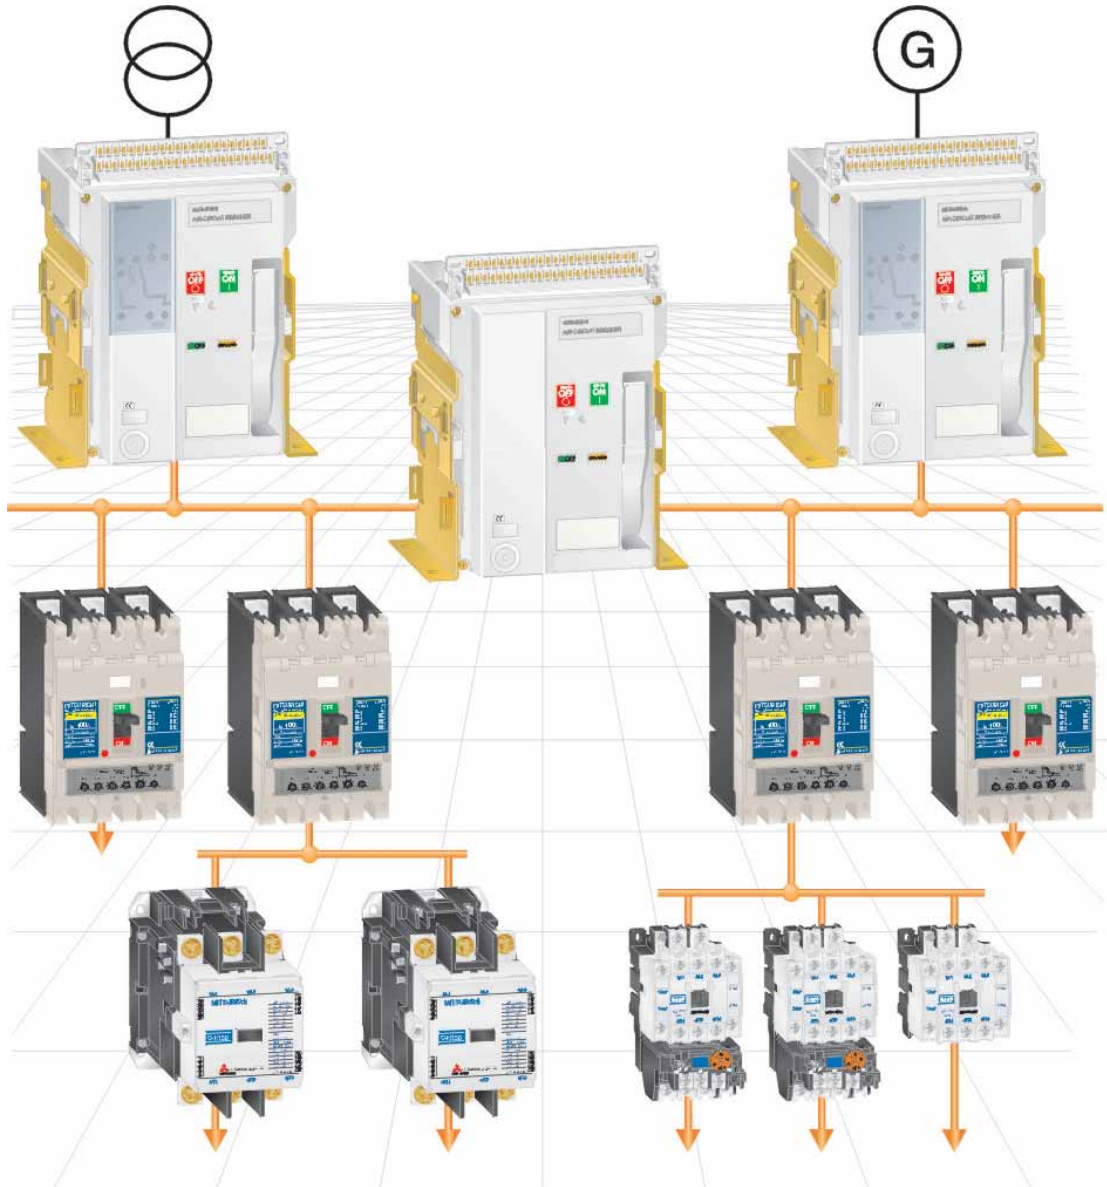

EUROPEAN HEADQUARTERS

MITSUBISHI ELECTRIC EUROPE B.V.
Gothaer Straße 8
D-40880 Ratingen
Phone: +49 (0) 21 02/4 86-0

MITSUBISHI ELECTRIC EUROPE B.V.
25, Boulevard des Bouvets
E-08190 Sant Cugat del Vallés
Phone: +34 9 3/5 65 31 60

MITSUBISHI ELECTRIC EUROPE B.V.
25, Boulevard des Bouvets
F-92741 Nanterre Cedex
Phone: +33 (0) 1 55 68 55 68

MITSUBISHI ELECTRIC EUROPE B.V.
Travellers Lane
GB-Hatfield Herts. AL10 8 XB
Phone: +44 (0) 17 07/27 61 00

MITSUBISHI ELECTRIC EUROPE B.V.
Via Paracelso 12
I-20041 Agrate Brianza (MI)
Phone: +39 (0) 3 96 05 31

EUROPEAN REPRESENTATIVES

Emac S.A. **BELGIUM**
Industrialaan 1
B-1702 Groot-Bijgaarden
Phone: +32 (0) 2 / 481 02 11

INEA CR d.o.o. **CROATIA**
Drvinje 63
HR-10000 Zagreb
Phone: +385 (0) 1 / 366 71 40

AutoCont **CZECHIA**
Nemocnicni 12
CZ-702 00 Ostrava 2
Phone: +420 59 / 6152 111

Louis poulsen **DENMARK**
Geminivej 32
DK-2670 Greve
Phone: +45 (0) 43 / 95 95 95

UTU POWEL OY **FINLAND**
Box 33
FIN-04251 Kerava
Phone: +358 (9) / 274 64 20

A. Drepanis S.A. **GREECE**
52, Arkadias Str.
GR-12132 Peristeri, Athens
Phone: +30 (10) 578 15 99

Meltrade Automatika Kft. **HUNGARY**
55, Harmat St.
HU-1105 Budapest
Phone: +36 (0)1 / 2605 602

MITSUBISHI ELECTRIC **IRELAND**
Westgate Business Park
IRL-Dublin 24
Phone: +353 (0) 1 / 419 88 00

GINO INDUSTRIES LTD. **ISRAEL**
26, Ophir street
IL-32235 Haifa
Phone: +972 (0) 4 / 867 06 56

RIFAS UAB **LITHUANIA**
Tinklu 29A
LT-5300 Panevezys
Phone: +370 (45) 582-728

INTEHSIS SRL **MOLDOVA**
Cuza-Voda 36/1-81
MD-2061 Chisinau
Phone: +373 (0) 2 / 562 263

Intech **NETHERLANDS**
Sluisjesdijk 155
NL-3008 AB-Rotterdam
Phone: +31 (0) 10 / 487 19 11

SCANELEC AS **NORWAY**
Leirvikasen 43 B
N-5020 Bergen
Phone: +47 55 50 60 00

MPL Technology Sp.z.o.o. **POLAND**
ul. Sliczna 36
PL-31-444 Kraków
Phone: +48 (0) 12 / 632 28 85

Sirius **ROMANIA**
Bd. Lacul Tei nr.1 B
RO-72301 Bucuresti 2
Phone: +40 (0) 21 / 201 71 47

Avtomatika Sever **RUSSIA**
Krapivnij Per. 5, Of. 402
RU-194044 St Petersburg
Phone: +7 812 / 1183 238

CONSYS **RUSSIA**
Promyshlennaya St. 42
RU-198099 St Petersburg
Phone: +7 812 / 325 36 53

Elektrostyle **RUSSIA**
Ul Garschina 11
RU-140070 Moscovskaja Oblast
Phone: +7 095/261 - 3808

ICOS **RUSSIA**
Ryazanskij Prospekt, 8a, Office 100
RU-109428 Moscow
Phone: +7 095 / 232 - 0207

INEA d.o.o. **SLOVENIA**
Stegne 11
SI-1000 Ljubljana
Phone: +386 (0) 1- 513 8100

CBI Ltd **SOUTH AFRICA**
Private Bag 2016
ZA-1600 Isando
Phone: +27 (0)11/ 928 2000

Euro Energy **SWEDEN**
Järnvägsgränd 36
S-434 24 Kungsbacka
Phone: +46 (0) 300 / 69 00 40

TRIELEC AG **SWITZERLAND**
Mühlentalstr. 136
CH-8200 Schaffhausen
Phone: +41 (0) 52 / 625 84 25

GTS **TURKEY**
Darulaceze Cad. No. 43A KAT:2
TR-80270 Okmeydanı-Istanbul
Phone: +90 (0) 212 / 320 1640

Specifications subject to change without notice.
Art.no.:64924-E, Printed in Germany 08.04

 **MITSUBISHI ELECTRIC** INDUSTRIAL AUTOMATION

Gothaer Straße 8
D-40880 Ratingen

Phone: +49 (0) 2102 486-780
Hotline: +49 (0) 1805 000-765

Fax: +49 2102 486-4069
megfa-mail@meg.mee.com

www.mitsubishi-automation.de
www.mitsubishi-automation.com