

# **Driver for SEW Eurodrive MOVIDRIVE**

**English**

**Svenska**

© Beijer Electronics AB 2000, MA00455, 2000-09

Beijer Electronics AB reserves the right to change information in this manual without prior notice. All examples in this manual are used solely to promote understanding of how the program works and its operation. Beijer Electronics AB take no responsibility if these examples are used in real applications.

## **SEW Eurodrive MOVIDRIVE**

This manual presents installation and handling of the driver SEW Eurodrive MOVIDRIVE to the terminals in the E-series.

The functionality in the E-terminals and in MAC Programmer+ are described in the E-manual.

© Beijer Electronics AB 2000, MA00455, 2000-08

Beijer Electronics AB reserves the right to change information in this manual without prior notice. All examples in this manual are used solely to promote understanding of how the program works and its operation. Beijer Electronics AB take no responsibility if these examples are used in real applications.

# **Content**

<b>1 Introduction .....</b>	<b>3</b>
<b>2 Install and update driver .....</b>	<b>4</b>
2.1 Installation of driver using Internet.....	4
2.2 Installation of driver from disk.....	4
<b>3 Connecting the terminal to the PLC system .....</b>	<b>5</b>
3.1 Settings in the MAC Programmer+ .....	5
3.2 Settings in the drive inverter .....	8
3.3 Connecting the terminal to the drive inverter .....	9
<b>4 Addressing .....</b>	<b>11</b>
4.1 Station handling.....	12
<b>5 Efficient communication .....</b>	<b>13</b>
5.1 Signals affecting the communication time.....	13
5.2 How to make the communication more efficient .....	14
5.3 Trouble shooting schedule.....	15
<b>6 Drawings .....</b>	<b>16</b>

# **1      Introduction**

This manual describes how the drive inverter SEW Eurodrive MOVIDRIVE is connected to the operator terminals in the E-series via the protocol MOVILINK and how they communicate. Addressing of an item is done in the normal SEW Eurodrive MOVILINK way. For information about the drive inverter we refer to the manual for current inverter.

The driver can be used with the SEW Eurodrive MOVIDRIVE series drive inverters.

## 2 Install and update driver

When installing MAC Programmer+ the drivers available at the time of release are installed too. A new driver can be added into MAC Programmer+ either with MAC Programmer+ using an Internet connection or from diskette. A driver can be updated to a newer version in the same ways.

### 2.1 Installation of driver using Internet

To update available drivers to the latest version or to install new drivers you can use the function Update terminal drivers, from Internet in the File menu in MAC Programmer+. All projects must be closed before this function is used and the computer must be able to make an Internet connection. You don't need a browser. When the connection is established a list is shown with all drivers that can be downloaded from Internet to the computer. The list shows the version number of available drivers and the version number of installed drivers. Mark the driver/drivers you want to install in the MAC Programmer+. The function Mark Newer will mark all drivers that are available in a newer version than the one installed and the drivers not installed. Then you select Download. Each drivers is approximately 500 kb and it is ready to use when the download is ready.

### 2.2 Installation of driver from disk

To update available drivers to the latest version or to install new drivers you can use the function Update terminal drivers, from Disk in the File menu in MAC Programmer+. All projects must be closed before this function is used. Select the folder with the new driver and choose to open the mpd-file. A list is shown with all drivers that can be installed showing the version number of available drivers and the version number of installed drivers. Mark the driver/drivers you want to install in the MAC Programmer+. The function Mark Newer will mark all drivers that are available in a newer version than the one installed and the drivers not installed. Then you select Install.

How to select the SEW Eurodrive MOVIDRIVE driver in the project and how to transfer it to the terminal are described in *chapter 3*.


### 3 Connecting the terminal to the drive inverter

#### 3.1 Settings in the MAC Programmer+


For communication with the drive inverter via the protocol MOVILINK the following settings must be made in the programming tool MAC Programmer+.

#### Driver selection

Choosing New in the File menu creates a new project and the dialog Project Settings is shown. In an existing project, the dialog is shown by selecting Project Settings in the File menu.

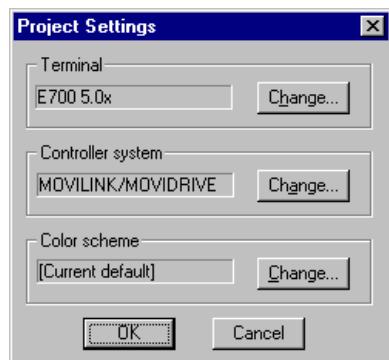


Press Change... under Controller system to get the choice list of available drivers. Choose Brand name, Protocol and then press OK. Press OK again to confirm the project settings.

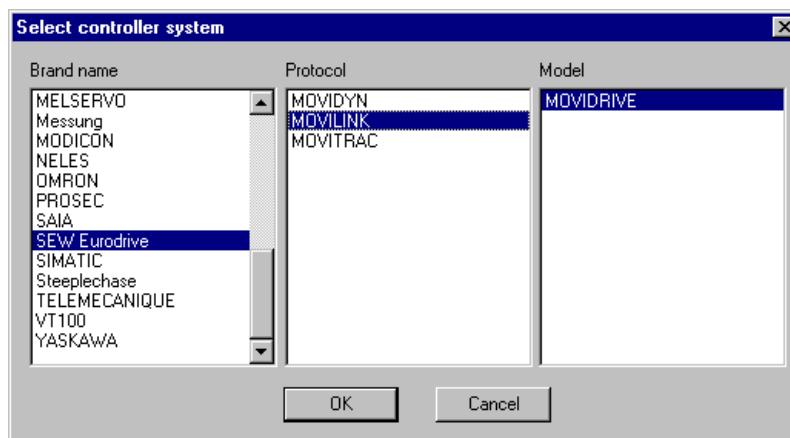

## Communication setup


The settings for the communication between the terminal and the drive inverter are done under Peripherals in the Setup menu. To change which port the drive inverter is connected to, mark Controller and hold left mouse button down and drag to move it to another communication port. Mark the selected communication port and press Edit to change the other communication settings.

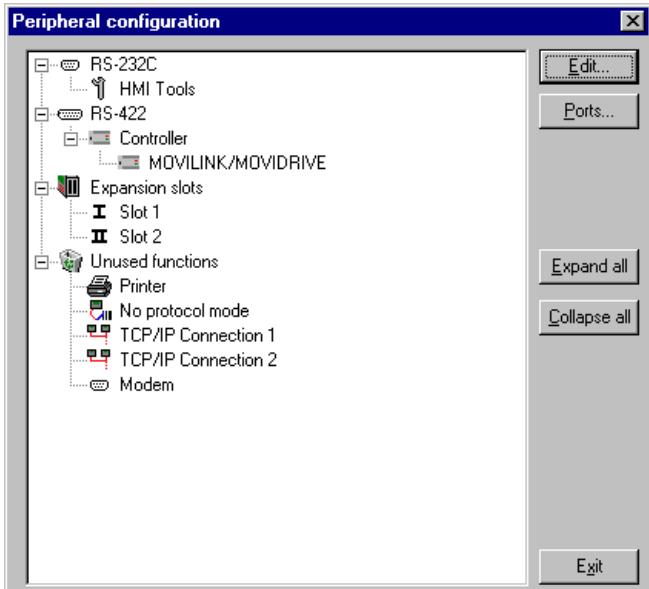

The settings should be:

Parameter	Description
Port	RS-232 or RS-422
Baudrate	9600
Data bits	8
Stop bits	1
Parity	Even

To make specific settings for the selected driver mark the driver name and press Edit.

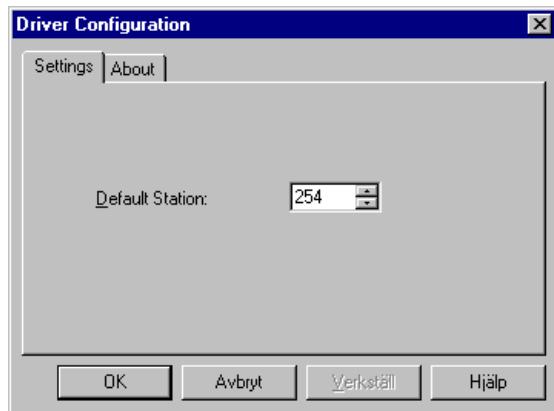

Under Settings you define the default station number. Values 0-99, 254 and 255 can be stated. 0-99 are individual addresses to inverters while 254 is an general address for point-to-point communication. Address 254 can not be used if there are more than one inverter connected to the network because any inverter will reply to this address irrespectively of it's own address. Address 255 is an broadcast address which all inverters are listening to and they will not reply to this message.

### Error messages

#### Wrong parameter


No access to P844      Parameter does not exist.

#### Communication faults

Comm Error 10.11.0.0    Error class.Error code.Address code high.Address code low

## Transfer the driver to the terminal

The selected driver is downloaded into the terminal when the project is transferred to the terminal. Choose Project in the Transfer menu.

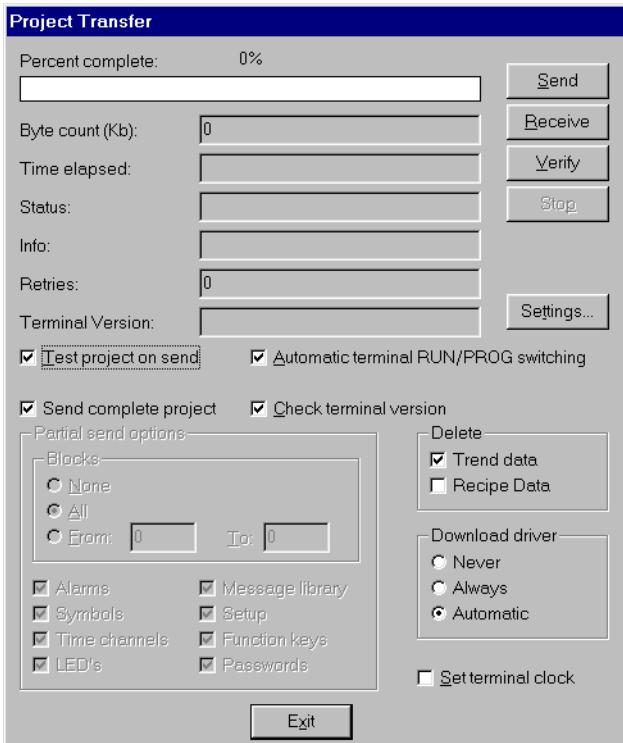

There are three alternatives when the driver is downloaded into the terminal:


Function	Description
Never	The driver is not downloaded and the existing driver in the terminal is used.
Always	The driver is downloaded every time the project is transferred.
Automatic	The driver is down-loaded if the driver in the terminal is not the same as the selected driver in the project. If it is the same the driver is not downloaded.

## 3.2 Settings in the drive inverter

For information about settings in the drive inverter we refer to the manual for current system.

### 3.3 Connecting the terminal to the drive inverter


#### Point-to-point connection

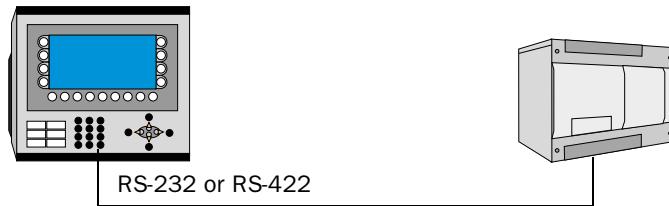

The point-to-point connection can be done via the RS-232C port on the terminal to the RS232 interface on the module USS21A on the SEW Eurodrive MOVIDRIVE. For cable configuration see cable drawing below.

E-terminal 9-pin DSUB female	SEW Eurodrive MOVIDRIVE RS-232 interface on module USS21A 9-pin DSUB male
TxD 2	3
RxD 3	2
GND 5	5

#### Multidrop connection

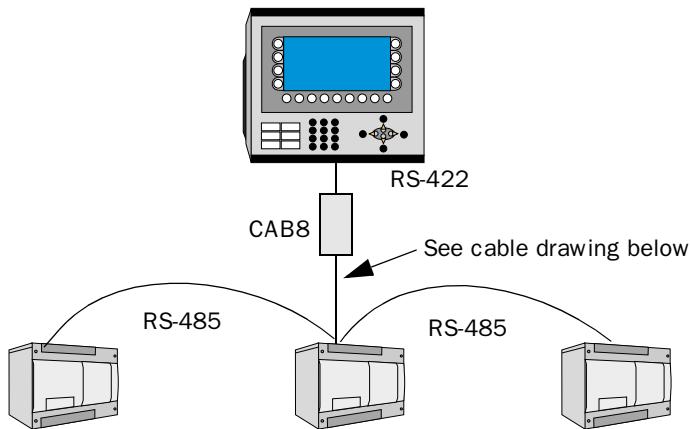


The terminal is connected to an RS-485 network via the adaptor CAB8 which is connected to the RS-422 port on the terminal. CAB8 is a standard adaptor that can be ordered from Beijer Electronics.

#### Terminal to RS485 interface on the USS21A module on MOVIDRIVE

CAB8 Plint	SEW Eurodrive MOVIDRIVE RS-485 Plint
1	1 +
2	2 -
3	3 OV5
4	
5	
6	
7	
8	

**Terminal to RS485 interface MOVIDRIVE**

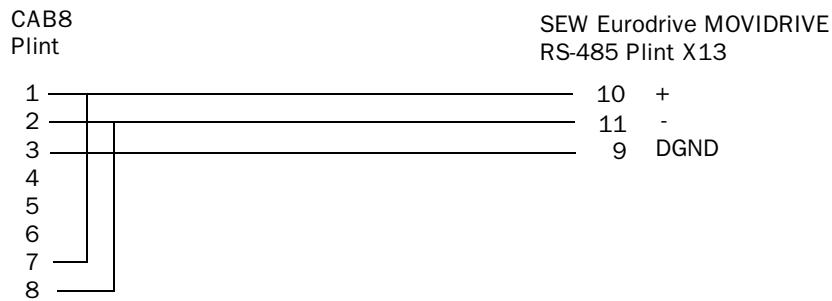

For further information about settings in the drive inverter, cable specifications and information about connecting the drive inverter to the terminal we refer to the manual for the current drive inverter.

## 4 Addressing

The terminal can handle the following data types in the drive inverter.

Parameters (P, NVP), Index (X, NVX), and IPOS variables (H).

Parameters and index (P, X), are written into the non-permanent RAM of the inverter and is therefore lost when the inverter is switched off. If it is desired that the setting is kept after power has been switched off NVP or NVX has to be used. Data is then written into the Non Volatile memory (e.g. in an EEPROM). Because the EEPROM only can support a specified number of writes this function should be used with care.

Which parameters, index and IPOS-variables that exist depends on the inverter connected as well as installed options in the inverter and has to be checked out in the manual for the drive.

### Digital objects:

Device	Min Address	Max Address	Comment
Prr.bb	P0.0	P955.31	Bit <i>bb</i> in register <i>rr</i>
NVPrr.bb	NVP0.0	NVP955.31	Bit <i>bb</i> in register <i>rr</i>
Xrr.bb	X8192.0	X24575.31	Bit <i>bb</i> in register <i>rr</i>
NVXrr.bb	NVX8192.0	NVX24575.31	Bit <i>bb</i> in register <i>rr</i>
Hrr.bb	H0.0	H511.31	Bit <i>bb</i> in register <i>rr</i>
Brr.bb	B0.0	B63.31	Bit <i>bb</i> in register <i>rr</i>

### Special comments about digital objects

If You choose to manouver a digital object, the terminal handle this by read before write. This means that the whole register is read and then the bit of interest is changed and the whole register is written back. If the controller changes some of the bits in the register during this communication, the controllers change is lost. If possible let the terminal / controller use different registers.

### Analog objects:

Device	Min Address	Max Address	Comment
Prr	P0	P955	Register <i>rr</i>
NVPrr	NVP0	NVP955	Register <i>rr</i>
Xrr	X8192	X24575	Register <i>rr</i>
NVXrr	NVX8192	NVX24575	Register <i>rr</i>
Hrr	H0	H511	Register <i>rr</i>
Rrr	R0	R63	Register <i>rr</i>

### Special comments about analog objects

All parameters, index and IPOS-variables are treated as 32-bit values.

For Gain and number of decimals refer to MoviDrive manual.

## **4.1 Station handling**

In the Driver Configuration dialog you state the default station. The default station is the station the terminal checks communication towards at start up, and it is also the station for the device which is not assigned to any specific station. For communication with other stations the station number is given as a prefix to the device.

Example

13:P5 Parameter 5 in station 13

## 5 Efficient communication

To make the communication between the terminal and the drive inverter quick and efficient the following should be noted about how the signals are read and what that can be done to optimize the reading.

### 5.1 Signals affecting the communication time

It is only signals to objects in the current block that are read continuously. Signals to objects in other blocks are not read, that is the number of blocks does not affect the communication time.

Besides the signals to objects in the current block, the terminal is continuously reading the following signals from the drive inverter:

Display signals  
Block print-out signals  
LED registers  
Alarm signals  
Remote acknowledge signals on alarms and alarm groups  
Login signal  
Logout signal  
Trend registers at the sample points  
Bargraph registers if using min/max indicators  
New display register  
Buzzer register  
Backlight signal  
Cursor control block  
Recipe control block  
Library index register  
Index registers  
PLC clock register if the PLC clock is used in the terminal  
List erase signal  
No protocol control register  
No protocol on signal

### Signals not affecting the communication time

The following signals do not affect the communication time:

- Signals linked to function keys
- Time channels
- Objects in the alarm messages

## 5.2 How to make the communication more efficient

### Group PLC-signals consecutively

The signals from the PLC system are read most rapidly if all signals in the list above are consecutive. If for example, 100 signals are defined, it is quickest to read these if they are linked to, for example, M0.0-M11.7. If the signals are spread out (e.g. I0.4, Q30.0, T45.3 etc.) the updating is slower.

### Efficient block changes

Block changes are carried out most rapidly and efficiently through the block jump function on the function keys or through a jump object. "Display signals" in the block header should only be used when the PLC system is to force the presentation of another block. The "New Display" register can also be used if the PLC system is to change the block. This does not affect communication as much as a larger number of "Display signals".

### Use the clock of the terminal

An extra load is put on communication if the clock of the PLC system is used since the clock register must be read up to the terminal. Downloading of the clock to the PLC system also creates an extra load. The interval between downloadings should therefore be as long as possible.

### Packaging of signals

When the signals are transferred between the terminal and the PLC system, all signals are not transferred simultaneously. Instead they are divided into packages with a number of signals in each package. To decrease the number of packages that have to be transferred and make the communication faster this number has to be considered. The number of signals in each package depends on the used driver. In the SEW Eurodrive MOVID-RIVE driver the number is 1 for analog devices and 32 for digital devices.


To make the communication as fast as possible the number of packages has to be minimized. Consecutive signals require a minimum of used packages but it is not always possible to have consecutive signals. In such cases the so-called waste between two signals has to be considered. The waste is the maximum distance between two signals you can have and still keep them in the same package.

The waste depends on the driver used. In the SEW Eurodrive MOVID-RIVE driver the number is 30 for digital devices. Analog devices don not cause any waste.

Signal	1	2	3	4	5	6	7	8	9	10
Used	X	X					X	X	X	
	}						Waste			

## 5.3 Trouble shooting schedule

The following trouble shooting schedule can help you to remember to check some settings, for example, if communication problems occurs.

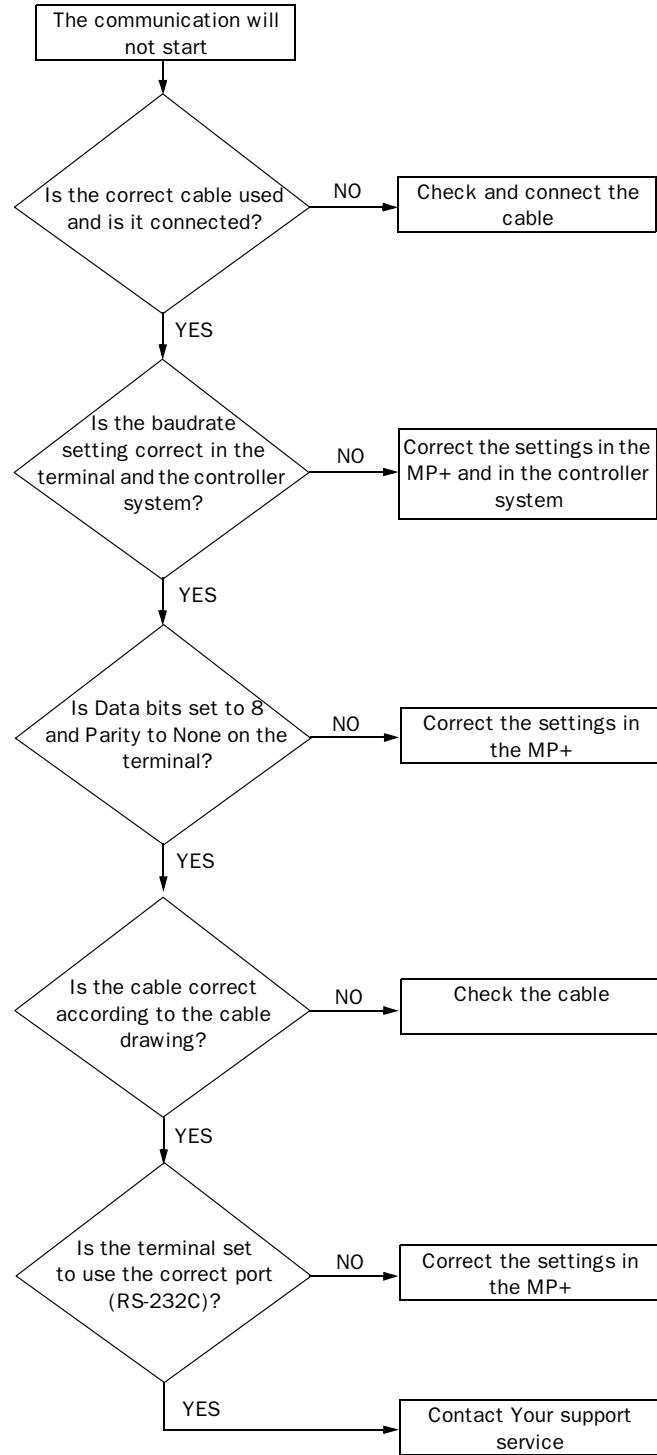

# 6 Drawings

RS-232 MAC 50/80/Exxx, MTA-250/G1/Exxx MAC 10/CM, CM10			
Pin no	Name	Signal direction MAC $\leftrightarrow$ XXX	
6 <sup>o</sup>	o1	—	—
7 <sup>o</sup>	o2	TxD	— $\triangleright$
8 <sup>o</sup>	o3	RxD	— $\triangleright$
9 <sup>o</sup>	o4	0V	—
5	o5	—	—
7	CTS	—	—
8	RTS	— $\triangleright$	— $\triangleright$
9*	+5V <5mA	— $\triangleright$	— $\triangleright$
D-sub 9-pol Hane 9-pin Male			

\* Ej i E-serien  
Not in E-series


  


RS-422 MAC 50/80, MTA-250/G1			
Pin no	Name	Signal direction MAC $\leftrightarrow$ XXX	
1 <sup>o</sup>	o9	—	—
2	+TxD	— $\triangleright$	— $\triangleright$
1	-TxD	— $\triangleright$	— $\triangleright$
3 <sup>o</sup>	o10	+RxD	— $\triangleright$
4 <sup>o</sup>	o11	-RxD	— $\triangleright$
5 <sup>o</sup>	o12	—	—
6 <sup>o</sup>	o13	—	—
6	o14	+RTS	— $\triangleright$
7 <sup>o</sup>	o15	-RTS	— $\triangleright$
8 <sup>o</sup>	o16	+CTS	— $\triangleright$
9	o17	-CTS	— $\triangleright$
D-sub 15-pol Hona 15-pin Female			


1<sup>o</sup> Stift 20 för anslutet till stift 21 i intern i MAC'en.  
Pin no 20 connected to pin no 21 internal in MAC/MTA.  
2) Endast 1 E-serien och med serie nr 9901 eller senare  
Only for E-series and with serial no 9901 or later  
3) Endast E100/MAC40+/MTA-100  
Only for E100/MAC40+/MTA-100

BEIJERS BEIJER ELECTRONICS			
Drawn	Date	App.	Revision
Bl.E	1993-09-07	—	—
Bl.E	1998-12-01	1	—



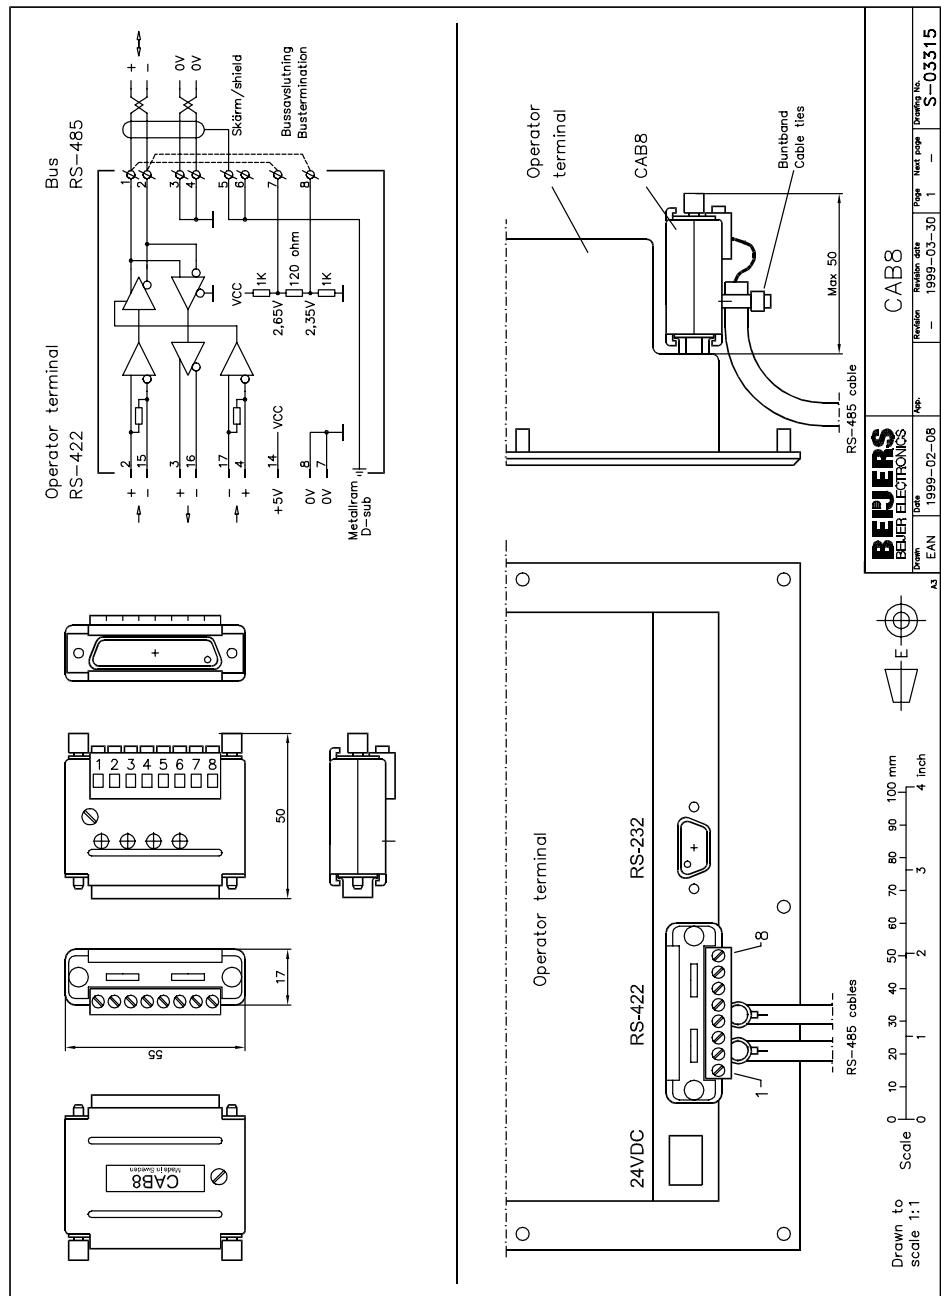

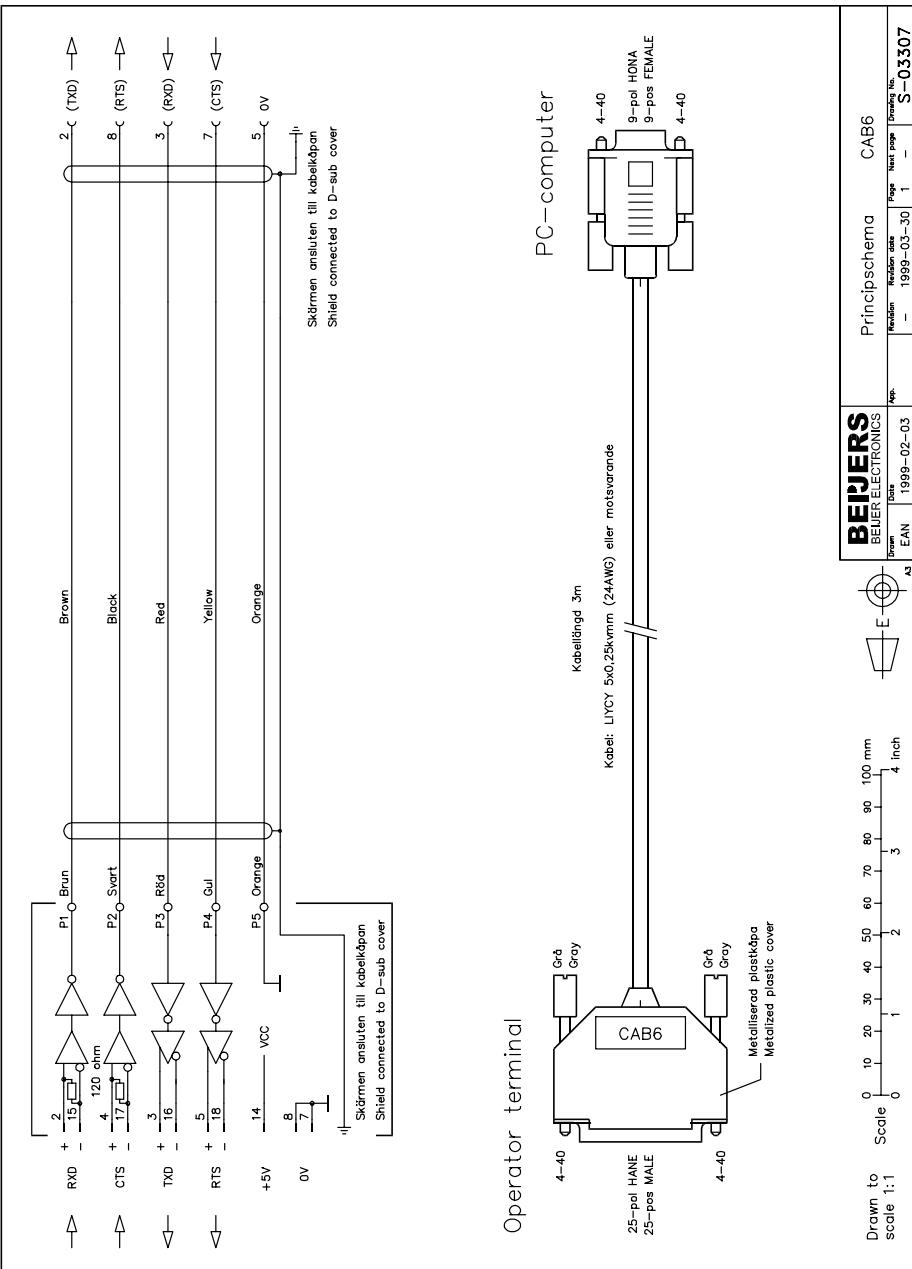
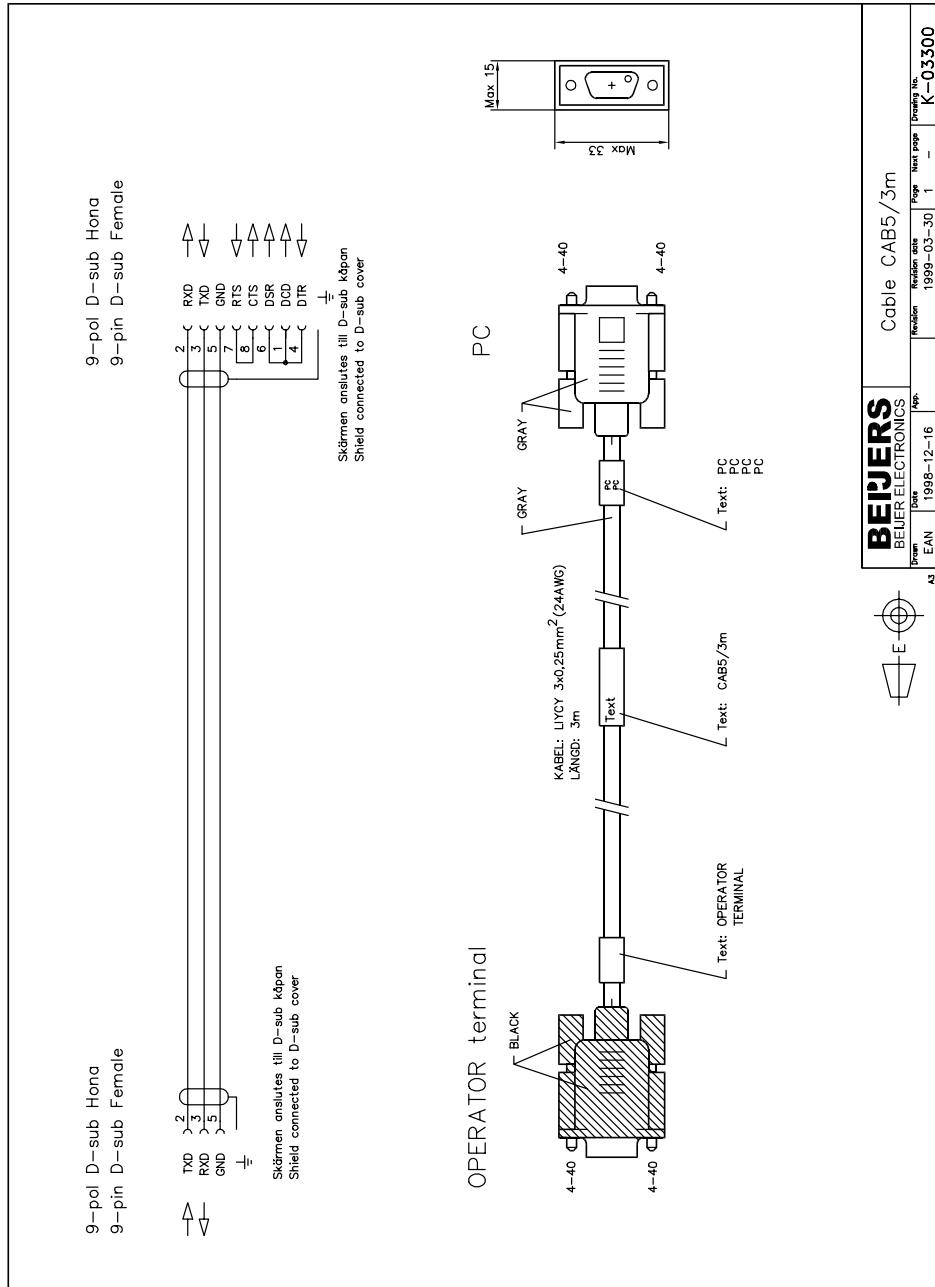
## **SEW Eurodrive MOVIDRIVE**

Denna manual är en installations- och hanteringsmanual till drivrutinen SEW Eurodrive MOVIDRIVE till operatörsterminalerna i E-serien.

Funktionaliteten i terminalerna och i MAC Programmer+ är beskriven i E-seriemanualen.

© Beijer Electronics AB 2000, MA00455, 2000-09

Beijer Electronics AB reserverar sig mot att informationen i denna manual kan komma att ändra sig utan föregående varning. Alla exempel i denna i denna manual används endast för att öka förståelsen om hur programmen arbetar. Beijer Electronics AB tar inget ansvar för att dessa fungerar i verkliga applikationer.

# Innehåll

1 Introduktion .....	3
2 Installation och uppdatering av drivrutin .....	4
2.1 Installation av drivrutin med Internet.....	4
2.2 Installation av drivrutin från disk .....	4
3 Anslutning av terminalen till multiomformaren . . .....	5
3.1 Inställningar i MAC Programmer+ .....	5
3.2 Inställningar i multiomformaren.....	8
3.3 Koppla in terminalen till multiomformaren.....	9
4 Adressering .....	11
4.1 Stationshantering .....	12
5 Effektiv kommunikation .....	13
5.1 Signaler som påverkar kommunikationstiden .....	13
5.2 Hur kommunikationen kan göras effektivare .....	14
5.3 Felsökningsschema .....	15
6 Ritningar.....	16

# **1    Introduktion**

Manualen beskriver hur multiomformaren ansluts till operatörterminaterna i E-serien och hur de kommunicerar via protokollet MOVILINK. Adressering i multiomformaren görs på normalt SEW Eurodrive MOVILINK sätt. För information om multiomformaren hänvisas till manualen för aktuell omformare.

Drivrutinen kan användas tillsammans med SEW Eurodrive MOVIDRIVE seriens multiomformare.

## 2 Installation och uppdatering av drivrutin

Tillgängliga drivrutiner installeras samtidigt som MAC Programmer+ installeras. En ny drivrutin kan läggas till i MAC Programmer+ antingen med hjälp av MAC Programmer+ och en Internet anslutning eller från diskett. En drivrutin uppdateras till nyare version på samma sätt.

### 2.1 Installation av drivrutin med Internet

För att uppdatera tillgängliga drivrutiner till senaste version eller för att installera nya drivrutiner används funktionen Update terminal drivers, from Internet i menyn File i MAC Programmer+. Alla projekt måste stängas innan funktionen används och datorn måste kunna göra en Internet anslutning. Någon browser behövs inte. När anslutningen är etablerad visas en lista med alla drivrutiner som kan laddas ner via Internet till datorn. I listan visas versionsnummer på tillgängliga drivrutiner och versionsnumret på installerade drivrutiner i MAC Programmer+. Markera de drivrutiner som skall installeras i MAC Programmer+. Funktionen Mark Newer markerar alla drivrutiner som finns tillgängliga i en senare version och de som inte är installerade. Välj därefter Download. Varje drivrutin är ungefär 500 kb stor och de är färdiga att använda när nedladdningen är klar.

### 2.2 Installation av drivrutin från disk

För att uppdatera tillgängliga drivrutiner till senaste version eller för att installera nya drivrutiner används funktionen Update terminal drivers, from Disk i menyn File i MAC Programmer+. Alla projekt måste stängas innan funktionen används. Välj den katalog som innehåller den nya drivrutinen och öppna mpd-filen. En lista visas med alla drivrutiner som kan installeras. I listan visas versionsnummer på tillgängliga drivrutiner och versionsnumret på installerade drivrutiner i MAC Programmer+. Markera de drivrutiner som skall installeras i MAC Programmer+. Funktionen Mark Newer markerar alla drivrutiner som finns tillgängliga i en senare version och de som inte är installerade. Välj därefter Install.

Hur man väljer SEW Eurodrive MOVIDRIVE drivrutinen i projektet och hur man överför den till terminalen beskrivs i *kapitel 3*.


### 3 Anslutning av terminalen till multiomformaren

#### 3.1 Inställningar i MAC Programmer+


För kommunikation med multiomformaren via protokollet MOVILINK måste följande inställningar göras i programmeringsverktyget MAC Programmer+.

##### Val av drivrutin

Välj New i File menyn, då skapas ett nytt projekt och dialogen Project Settings visas. I ett befintligt projekt, visas dialogen genom då man väljer Project Settings i File menyn.

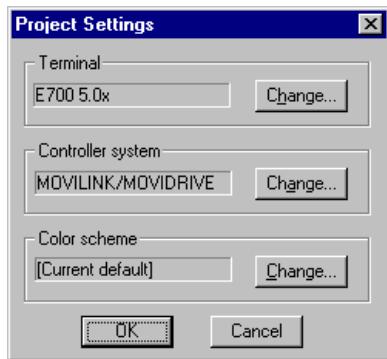


Tryck på Change... under Controller system och välj i listan över tillgängliga system. Välj fabrikat, protokoll och modell och tryck för OK. Tryck på OK igen och bekräfta projektinställningarna.

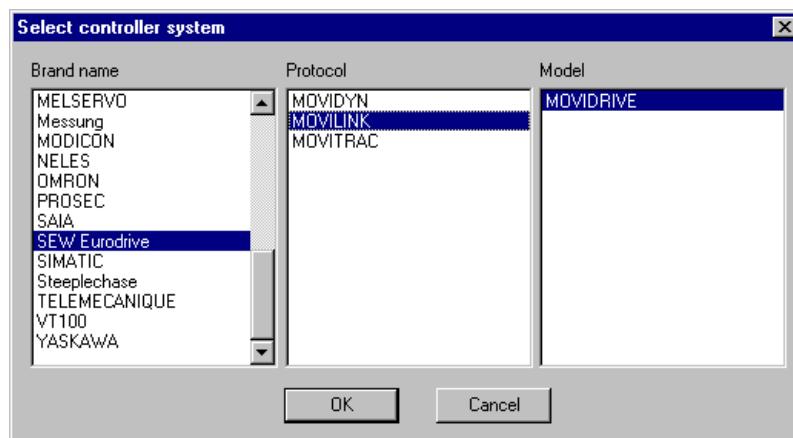

## Kommunikationsinställning


Inställningarna för kommunikationen mellan terminalen och multiomformaren utföres under Peripherals i Setup menyn. För att ändra multiomformarens anslutna port, markera Controller och håll vänster musknapp nere och drag den till en annan kommunikationsport. Markera den valda kommunikationsporten och tryck Edit för ändra den nya kommunikationsinställningen.

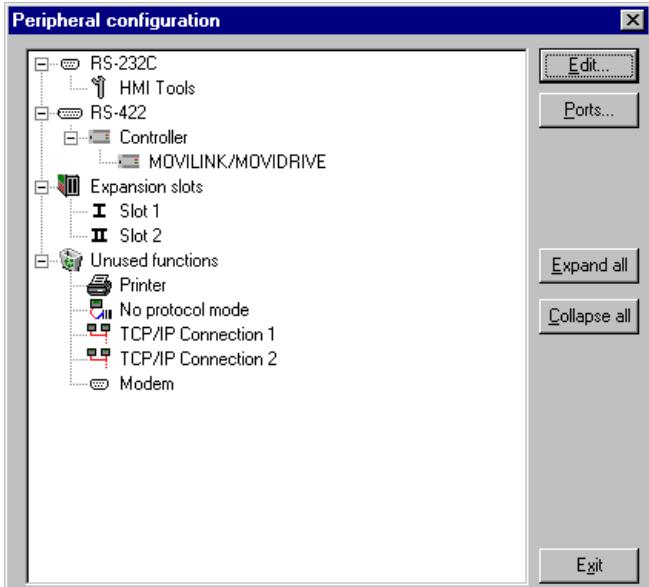

Inställningarna skall vara:

Parameter	Beskrivning
Port	RS-232 eller RS-422
Baudrate	9600
Data bits	8
Stop bits	1
Parity	Even

För att göra speciella inställningar för vald drivrutin markerar du namnet på drivrutinen och trycker på Edit.

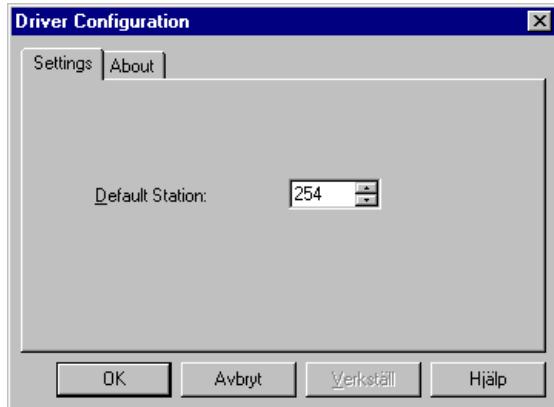

Under Settings definierar du stationens nummer. Värden 0-99, 254 och 255 kan anges. 0-99 är individuella adresser för omformaren medan 254 är en generell adress för point-to-point kommunikation. Adress 254 kan inte användas om det finns fler än en omformare ansluten i nätverket eftersom alla anslutna omformare kommer att svara på denna adress oberoende av omformarens egen adress. Adress 255 är en sändningsadress som alla omformare lyssnar av men de kan inte svara på dessa meddelanden.

### **Felmeddelanden**

#### **Fel parameter**


No access to P844      Parametern finns inte.

#### **Kommunikationsfel**

Comm Error 10.11.0.0    Felkodsklass.Felkod.Adresskod hög.Adresskod låg

## Överföra drivrutinen till terminalen

Drivrutinen laddas ner till terminalen när hela projektet överförs till terminalen. Välj Project i Transfer menyn.

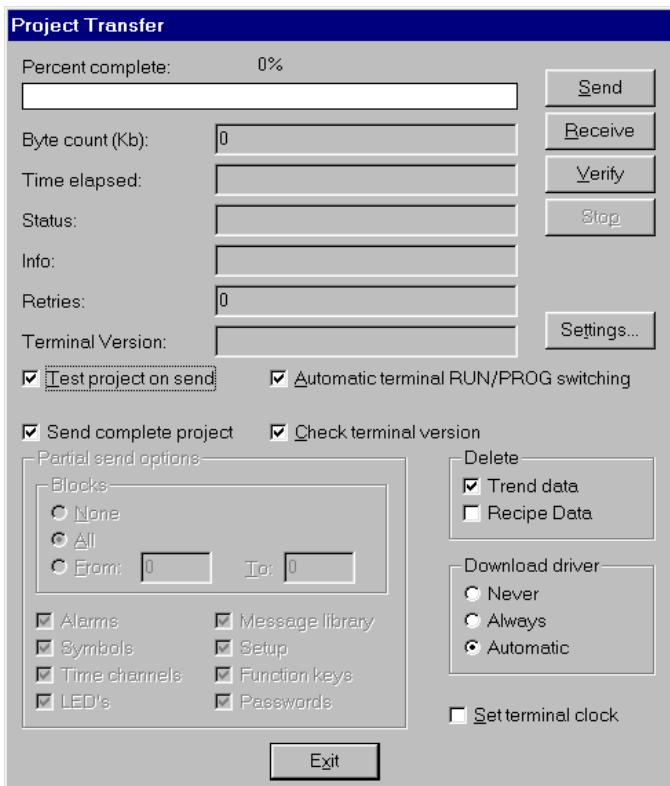

Det finns tre olika alternativ när drivrutinen laddas ned till terminalen.


Funktion	Beskrivning
Never	Drivrutinen laddas aldrig, befintlig drivrutin i terminalen används.
Always	Drivrutinen laddas varje gång projektet överföres.
Automatic	Drivrutinen laddas om drivrutinen i terminalen inte är samma som i projektet. Om samma drivrutin finns laddas den inte.

## 3.2 Inställningar i multiomformaren

För vidare information om inställningar i multiomformaren hänvisas till aktuell manual.

### 3.3 Koppla in terminalen till multiomformaren

#### Point-to-point anslutning

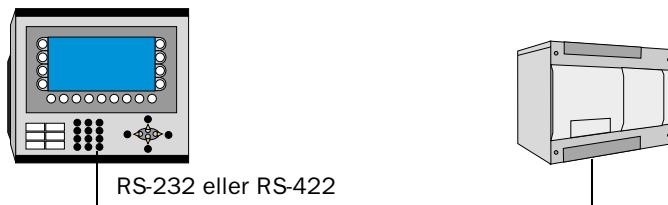


Point-to-point anslutningen görs via RS-232C porten på terminalen till RS232 gränssnittet på modulen USS21A på SEW Eurodrive MOVIDRIVE omformaren. För kabel-konfiguration hänvisas till nedanstående kabelritning.

E-terminal  
9-pol DSUB hona

SEW Eurodrive MOVIDRIVE  
RS-232 gränssnitt på modul USS21A  
9-pol DSUB hane

TxD 2	—	3
RxD 3	—	2
GND 5	—	5

#### Multidrop-anslutning

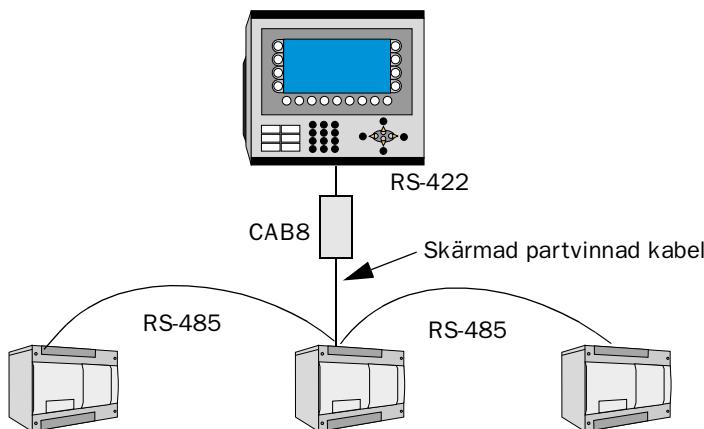

Terminalen ansluts till ett RS-485-nätverk via adapttern CAB8 vilken är ansluten till RS-422 porten på terminalen. CAB8 är en standard adapter som kan beställas från Beijer Electronics.


#### Terminal till RS485 gränssnitt på USS21A modulen på MOVIDRIVE omformaren

CAB8  
Plint

SEW Eurodrive MOVIDRIVE  
RS-485 Plint

1	—	1	+
2	—	2	-
3	—	3	OV5
4	—		
5	—		
6	—		
7	—		
8	—		

**Terminal till RS485 gränsnittet MOVIDRIVE**

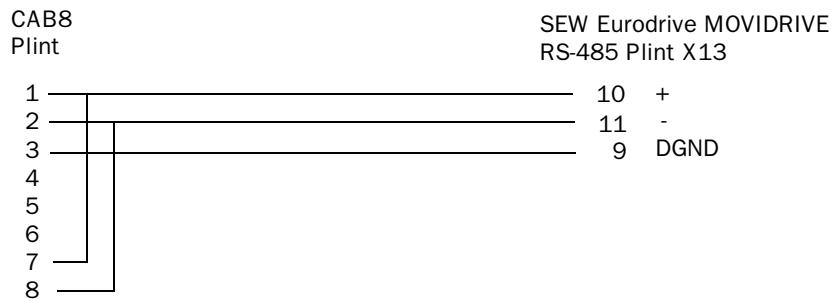

För vidare information om inställningar i omformaren, kabelspecifikationer och information om hur omformaren ansluts till terminalen hänvisas till manualen för aktuell omformare.

## 4 Adressering

Terminalen kan hantera följande datatyper i multiomformaren.

Parametrarna (P, NVP), Index (X, NVX), och IPOS variabler (H).

Parametrar och index (P, X), skrivs in i icke permanent RAM minne i omformaren och försvinner därför då omformaren stängs av. För att behålla inställningen då omformaren stängs av måste NVP eller NVX användas. Data skrivs in i permanent minne (t ex i ett EEPROM). Eftersom EEPROM endast klarar ett visst antal skrivningar bör funktionen användas med försiktighet.

Vilka parametrar, index och IPOS-variabler som finns är beroende på anslutet omformare samt vilka optioner som är installerade i omformaren och måste kontrolleras i manualen för omformaren.

### Digitala objekt:

Signal	Min adress	Max adress	Kommentar
Prr.bb	P0.0	P955.31	Bit <i>bb</i> i register <i>rr</i>
NVPrr.bb	NVP0.0	NVP955.31	Bit <i>bb</i> i register <i>rr</i>
Xrr.bb	X8192.0	X24575.31	Bit <i>bb</i> i register <i>rr</i>
NVXrr.bb	NVX8192.0	NVX24575.31	Bit <i>bb</i> i register <i>rr</i>
Hrr.bb	H0.0	H511.31	Bit <i>bb</i> i register <i>rr</i>
Brr.bb	B0.0	B63.31	Bit <i>bb</i> i register <i>rr</i>

### Speciella kommentarer för digitala objekt

Om du väljer att manövrera digitala objekt kommer terminalen att göra detta genom att läsa först sedan skriva. Detta betyder att hela registret läses, önskad bit ändras och därefter skrivs hela registret tillbaka. Om omformaren ändrar bitar under kommunikation kommer de att gå förlorade. Det är möjligt att låta terminalen och omformaren använda olika register.

### Analoga objekt:

Signal	Min adress	Max adress	Kommentar
Prr	P0	P955	Register <i>rr</i>
NVPrr	NVP0	NVP955	Register <i>rr</i>
Xrr	X8192	X24575	Register <i>rr</i>
NVXrr	NVX8192	NVX24575	Register <i>rr</i>
Hrr	H0	H511	Register <i>rr</i>
Rrr	R0	R63	Register <i>rr</i>

### Speciella kommentarer för analoga objekt

Alla parametrar, index och IPOS-variabler hanteras som 32-bitars värden.

För förstärkning och antal decimaler hänvisas till manualen för MoviD-drive.

## 4.1 Stationshantering

Under Driver Configuration i Peripherals anges förinställd station. Det är den station som terminalen testar kommunikationen till vid uppstart. Det är också den station som adresseras då inget stationsnummer anges. För att kommunicera med andra stationer måste stationsnumret anges som prefix till adressen.

Exempel

13 : P5              Parameter 5 i station 13

## 5 Effektiv kommunikation

För att göra kommunikationen mellan terminalen och multiomformaren snabb och effektiv bör följande noteras om hur signalerna läses och vad som kan göras för att optimera detta.

### 5.1 Signaler som påverkar kommunikationstiden

Det är endast signalerna till objekten i aktuellt block som läses kontinuerligt. Signalerna till objekten i de andra blocken läses inte och antalet block påverkar därför inte kommunikationstiden.

Förutom signalerna till objekten det i aktuella blocket, läser terminalen hela tiden följande signaler från multiomformaren:

Display signaler  
Blockutskriftsignaler  
LED register  
Larmsignal  
Fjärrkvittering till larm och larmgrupper  
Login signal  
Logout signal  
Trendregister vid samplingspunkterna  
Register till stapelobjekten om min/max indikatorer används  
New displayregistret  
Summerregistret  
Registret som styr bakrundsbelysningen  
Kontrollblocket för markören  
Kontrollblocket för recept  
Indexregistret till biblioteket  
Indexregister  
Registren till systemklockan om systemklockan används i terminalen  
Signalen som styr radering av larmlistan  
Kontrollregistret för No protocol  
Kontrollsignalen som styr om No protocol skall vara aktivt

#### Signaler som inte påverkar kommunikationstiden

Följande signaler påverkar inte kommunikationstiden:

- Signaler kopplade till funktionstangenterna
- Tidkanalerna
- Objekt i larmtexter

## 5.2 Hur kommunikationen kan göras effektivare

### Gruppera signalerna i en följd

Signalerna från omformaren läses snabbast om signalerna i listan ovan är i en följd. Till exempel om 100 signaler är definierade, läses dessa snabbast om de grupperas, till exempel M0.0-M11.7. Om signalerna sprides ut (t ex I0.4, Q30.0, T45.3 etc.) går uppdateringen långsammare.

### Effektiva blockbyten

Blockbyte sker effektivast via blockhoppsfunktionen på funktionstangentrna eller via hoppobjekt. "Display signals" i blockhuvudet bör endast användas då omformaren skall tvinga fram ett annat block. Skall omformaren byta bild kan även "New Display" -registret användas. Det belastar inte kommunikationen lika mycket som ett större antal "Display signals".

### Använd klockan i terminalen

Använts terminalklockan belastas kommunikationen eftersom omformarens klockregister måste läsas upp till terminalen. Nerladdningen av terminalklockan till omformaren belastar också.

Intervallet mellan nerladdningarna bör därför vara så långt som möjligt.

### Packning av signaler

När signalerna skall överföras mellan terminalen och omformaren, överförs inte alla signalerna samtidigt. De delas istället in i paket med ett antal signaler i varje. För att minska antalet paket som skall överföras och för att göra kommunikationen snabbare måste man ta hänsyn till detta. Antalet signaler i varje paket beror på drivrutinen. I SEW Eurodrive MOVIDRIVE drivrutinen är antalet 1 st för analoga signaler och 32 för digitala signaler.


För att göra kommunikation så snabb som möjligt måste antalet paket minimeras. Signaler i en följd behöver ett minimalt antal paket men det är kanske inte alltid nödvändigt. I sådana fall blir det sk glapp mellan två signaler. Glappet är det maximala avståndet mellan två signaler där de fortfarande kan hållas inom samma paket.

Glappet beror på vilken drivrutin som används. I SEW Eurodrive MOVIDRIVE drivrutin är antalet 30 för digitala signaler. Analoga signaler skapar inget glapp.

Signal	1	2	3	4	5	6	7	8	9	10
Använd	X	X					X	X	X	
	Glapp									

## 5.3 Felsökningsschema

Följande felsökningsschema hjälper dig att kontrollera en del inställningar t ex om kommunikationsproblem uppstår.

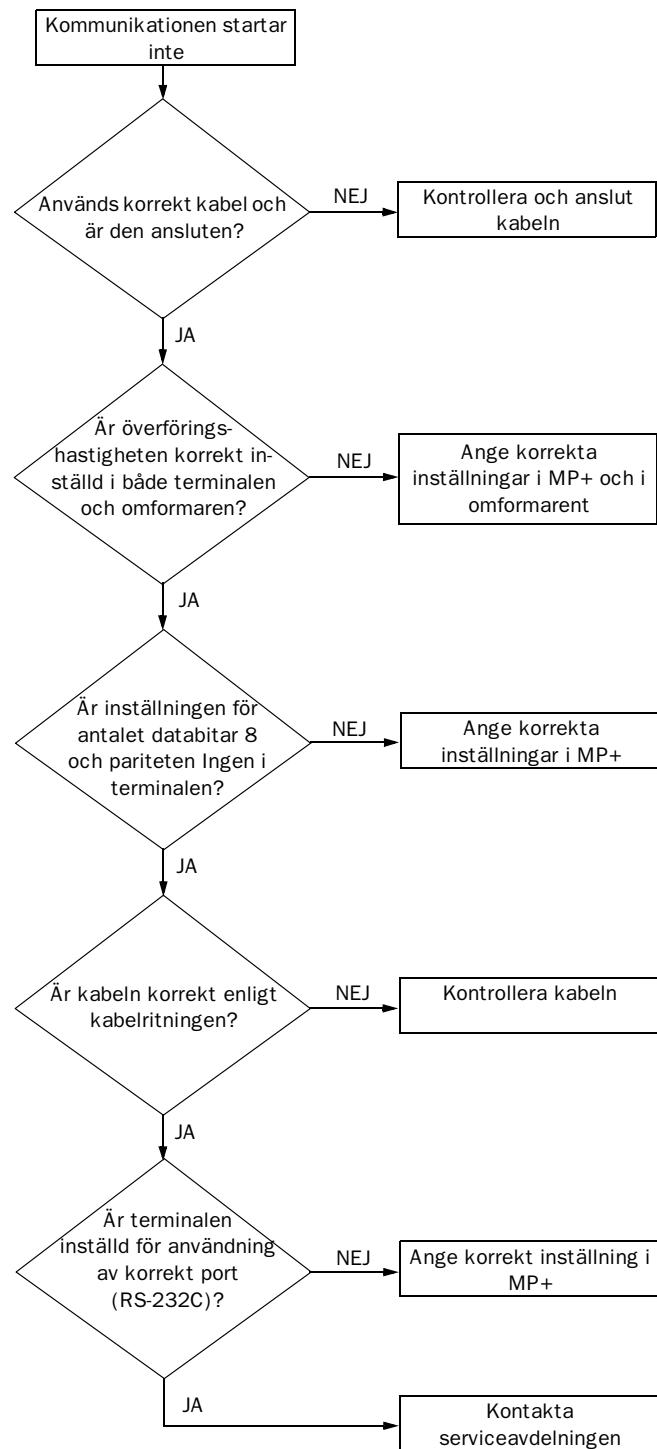

# 6 Ritningar

RS-232 MAC 50/80/Exxx, MTA-250/G1/Exxx MAC 10/CM, CM10			
Pin no	Name	Signal direction MAC $\leftrightarrow$ XXX	
6 <sup>o</sup>	o1	—	—
7 <sup>o</sup>	o2	TxD	— $\triangleright$
8 <sup>o</sup>	o3	RxD	— $\triangleright$
9 <sup>o</sup>	o4	0V	—
9 <sup>o</sup>	o5	—	—
D-sub 9-pol Hane	7	CTS	— $\triangleright$
9-pin Male	8	RTS	— $\triangleright$
	9*	+5V <5mA	— $\triangleright$

\* Ej i E-serien  
Not in E-series

RS-422 MAC 50/80, MTA-250/G1			
Pin no	Name	Signal direction MAC $\leftrightarrow$ XXX	
1 <sup>o</sup>	o9	—	—
2	+TxD	— $\triangleright$	—
1	-TxD	— $\triangleright$	—
3 <sup>o</sup>	o10	+RxD	— $\triangleright$
4 <sup>o</sup>	o11	—	—
5 <sup>o</sup>	o12	-RxD	— $\triangleright$
6 <sup>o</sup>	o13	+RTS	— $\triangleright$
6	o14	—	—
7 <sup>o</sup>	o15	-RTS	— $\triangleright$
8 <sup>o</sup>	o16	+CTS	— $\triangleright$
D-sub 15-pol Hona	9	-CTS	— $\triangleright$
15-pin Female	8,15	0V	—
	13,14	+5V >20mA	— $\triangleright$

RS-422 MAC 40+Exxx, MTA-100/Exxx MAC 10/CM, CM10			
Pin no	Name	Signal direction MAC $\leftrightarrow$ XXX	
1o	o14	2	+TxD
2	o15	15	-TxD
3	o16	3	+RxD
4	o17	16	-RxD
5	o18	6o	+RTS
6	o19	7o	-RTS
7	o20	8o	+CTS
8	o21	9o	-CTS
9	o22	10o	+CTS
10	o23	11o	-CTS
11o	o24	18	0V
12o	o25	20	1
13o	o26	21	1
		7,8	0V

- 1) Stift 20 för anslutet till stift 21 i intern i MAC'en.
- 2) Pin no 20 connected to pin no 21 internal in MAC/MTA.
- 3) Endast 1 E-serien och med serie nr 9901 eller senare
- 4) Only for E-series and with serial no 9901 or later
- 5) Endast E100/MAC40+/MTA-100
- 6) Only for E100/MAC40+/MTA-100

BEIJERS BEIJER ELECTRONICS			
Drawn	Date	Rev.	Next Rev.
BL-E	1993-09-07	—	1998-12-01
			—

Drawing No:  
**S-00724**

