MITSUBISHI ELECTRIC

Motion Controller

MELSEC Q series

Q173D(S)CPU/Q172D(S)CPU Motion Controller (SV22) Programming Manual (VIRTUAL MODE)

-Q172DCPU
-Q173DCPU
-Q172DCPU-S1
-Q173DCPU-S1
-Q172DSCPU
-Q173DSCPU

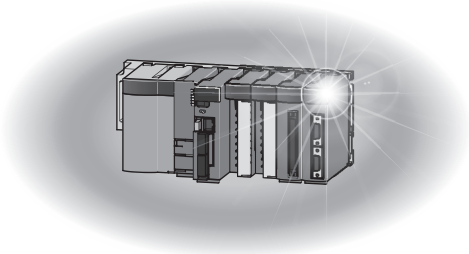

● SAFETY PRECAUTIONS ●

(Please read these instructions before using this equipment.)

Before using this product, please read this manual and the relevant manuals introduced in this manual carefully and pay full attention to safety to handle the product correctly.
These precautions apply only to this product. Refer to the Q173D(S)CPU/Q172D(S)CPU Users manual for a description of the Motion controller safety precautions.
In this manual, the safety instructions are ranked as "DANGER" and "CAUTION".

⚠DANGER	Indicates that incorrect handling may cause hazardous conditions, resulting in death or severe injury.
⚠CAUTION	Indicates that incorrect handling may cause hazardous conditions, resulting in medium or slight personal injury or physical damage.

Depending on circumstances, procedures indicated by ⚠ CAUTION may also be linked to serious results.
In any case, it is important to follow the directions for usage.

Please save this manual to make it accessible when required and always forward it to the end user.

For Safe Operations

1. Prevention of electric shocks

⚠DANGER

- Never open the front case or terminal covers while the power is ON or the unit is running, as this may lead to electric shocks.
- Never run the unit with the front case or terminal cover removed. The high voltage terminal and charged sections will be exposed and may lead to electric shocks.
- Never open the front case or terminal cover at times other than wiring work or periodic inspections even if the power is OFF. The insides of the Motion controller and servo amplifier are charged and may lead to electric shocks.
- Completely turn off the externally supplied power used in the system before mounting or removing the module, performing wiring work, or inspections. Failing to do so may lead to electric shocks.
- When performing wiring work or inspections, turn the power OFF, wait at least ten minutes, and then check the voltage with a tester, etc. Failing to do so may lead to electric shocks.
- Be sure to ground the Motion controller, servo amplifier and servo motor. (Ground resistance : 100 Ω or less) Do not ground commonly with other devices.
- The wiring work and inspections must be done by a qualified technician.
- Wire the units after installing the Motion controller, servo amplifier and servo motor. Failing to do so may lead to electric shocks or damage.
- Never operate the switches with wet hands, as this may lead to electric shocks.
- Do not damage, apply excessive stress, place heavy things on or sandwich the cables, as this may lead to electric shocks.
- Do not touch the Motion controller, servo amplifier or servo motor terminal blocks while the power is ON, as this may lead to electric shocks.
- Do not touch the built-in power supply, built-in grounding or signal wires of the Motion controller and servo amplifier, as this may lead to electric shocks.

2. For fire prevention

⚠CAUTION

- Install the Motion controller, servo amplifier, servo motor and regenerative resistor on incombustible. Installing them directly or close to combustibles will lead to fire.
- If a fault occurs in the Motion controller or servo amplifier, shut the power OFF at the servo amplifier's power source. If a large current continues to flow, fire may occur.
- When using a regenerative resistor, shut the power OFF with an error signal. The regenerative resistor may abnormally overheat due to a fault in the regenerative transistor, etc., and may lead to fire.
- Always take heat measures such as flame proofing for the inside of the control panel where the servo amplifier or regenerative resistor is installed and for the wires used. Failing to do so may lead to fire.
- Do not damage, apply excessive stress, place heavy things on or sandwich the cables, as this may lead to fire.

3. For injury prevention

⚠CAUTION
● Do not apply a voltage other than that specified in the instruction manual on any terminal. Doing so may lead to destruction or damage. ● Do not mistake the terminal connections, as this may lead to destruction or damage. ● Do not mistake the polarity (+ / -), as this may lead to destruction or damage. ● Do not touch the heat radiating fins of controller or servo amplifier, regenerative resistor and servo motor, etc., while the power is ON and for a short time after the power is turned OFF. In this timing, these parts become very hot and may lead to burns. ● Always turn the power OFF before touching the servo motor shaft or coupled machines, as these parts may lead to injuries. ● Do not go near the machine during test operations or during operations such as teaching. Doing so may lead to injuries.

4. Various precautions

Strictly observe the following precautions.

Mistaken handling of the unit may lead to faults, injuries or electric shocks.

(1) System structure

⚠CAUTION
● Always install a leakage breaker on the Motion controller and servo amplifier power source. ● If installation of an electromagnetic contactor for power shut off during an error, etc., is specified in the instruction manual for the servo amplifier, etc., always install the electromagnetic contactor. ● Install the emergency stop circuit externally so that the operation can be stopped immediately and the power shut off. ● Use the Motion controller, servo amplifier, servo motor and regenerative resistor with the correct combinations listed in the instruction manual. Other combinations may lead to fire or faults. ● Use the Motion controller, base unit and motion module with the correct combinations listed in the instruction manual. Other combinations may lead to faults. ● If safety standards (ex., robot safety rules, etc.,) apply to the system using the Motion controller, servo amplifier and servo motor, make sure that the safety standards are satisfied. ● Construct a safety circuit externally of the Motion controller or servo amplifier if the abnormal operation of the Motion controller or servo amplifier differ from the safety directive operation in the system. ● In systems where coasting of the servo motor will be a problem during the forced stop, emergency stop, servo OFF or power supply OFF, use dynamic brakes. ● Make sure that the system considers the coasting amount even when using dynamic brakes. ● In systems where perpendicular shaft dropping may be a problem during the forced stop, emergency stop, servo OFF or power supply OFF, use both dynamic brakes and electromagnetic brakes.

⚠CAUTION

- The dynamic brakes must be used only on errors that cause the forced stop, emergency stop, or servo OFF. These brakes must not be used for normal braking.
- The brakes (electromagnetic brakes) assembled into the servo motor are for holding applications, and must not be used for normal braking.
- The system must have a mechanical allowance so that the machine itself can stop even if the stroke limits switch is passed through at the max. speed.
- Use wires and cables that have a wire diameter, heat resistance and bending resistance compatible with the system.
- Use wires and cables within the length of the range described in the instruction manual.
- The ratings and characteristics of the parts (other than Motion controller, servo amplifier and servo motor) used in a system must be compatible with the Motion controller, servo amplifier and servo motor.
- Install a cover on the shaft so that the rotary parts of the servo motor are not touched during operation.
- There may be some cases where holding by the electromagnetic brakes is not possible due to the life or mechanical structure (when the ball screw and servo motor are connected with a timing belt, etc.). Install a stopping device to ensure safety on the machine side.

(2) Security

⚠CAUTION

- To maintain the security (confidentiality, integrity, and availability) of the programmable controller and the system against unauthorized access, denial-of-service (DoS) attacks, computer viruses, and other cyberattacks from external devices via the network, take appropriate measures such as firewalls, virtual private networks (VPNs), and antivirus solutions.

(3) Parameter settings and programming

⚠CAUTION

- Set the parameter values to those that are compatible with the Motion controller, servo amplifier, servo motor and regenerative resistor model and the system application. The protective functions may not function if the settings are incorrect.
- The regenerative resistor model and capacity parameters must be set to values that conform to the operation mode, servo amplifier and servo power supply module. The protective functions may not function if the settings are incorrect.
- Set the mechanical brake output and dynamic brake output validity parameters to values that are compatible with the system application. The protective functions may not function if the settings are incorrect.
- Set the stroke limit input validity parameter to a value that is compatible with the system application. The protective functions may not function if the setting is incorrect.

⚠CAUTION

- Set the servo motor encoder type (increment, absolute position type, etc.) parameter to a value that is compatible with the system application. The protective functions may not function if the setting is incorrect.
- Set the servo motor capacity and type (standard, low-inertia, flat, etc.) parameter to values that are compatible with the system application. The protective functions may not function if the settings are incorrect.
- Set the servo amplifier capacity and type parameters to values that are compatible with the system application. The protective functions may not function if the settings are incorrect.
- Use the program commands for the program with the conditions specified in the instruction manual.
- Set the sequence function program capacity setting, device capacity, latch validity range, I/O assignment setting, and validity of continuous operation during error detection to values that are compatible with the system application. The protective functions may not function if the settings are incorrect.
- Some devices used in the program have fixed applications, so use these with the conditions specified in the instruction manual.
- The input devices and data registers assigned to the link will hold the data previous to when communication is terminated by an error, etc. Thus, an error correspondence interlock program specified in the instruction manual must be used.
- Use the interlock program specified in the intelligent function module's instruction manual for the program corresponding to the intelligent function module.

(4) Transportation and installation

⚠CAUTION

- Transport the product with the correct method according to the mass.
- Use the servo motor suspension bolts only for the transportation of the servo motor. Do not transport the servo motor with machine installed on it.
- Do not stack products past the limit.
- When transporting the Motion controller or servo amplifier, never hold the connected wires or cables.
- When transporting the servo motor, never hold the cables, shaft or detector.
- When transporting the Motion controller or servo amplifier, never hold the front case as it may fall off.
- When transporting, installing or removing the Motion controller or servo amplifier, never hold the edges.
- Install the unit according to the instruction manual in a place where the mass can be withstood.
- Do not get on or place heavy objects on the product.
- Always observe the installation direction.
- Keep the designated clearance between the Motion controller or servo amplifier and control panel inner surface or the Motion controller and servo amplifier, Motion controller or servo amplifier and other devices.

⚠CAUTION

- Do not install or operate Motion controller, servo amplifiers or servo motors that are damaged or that have missing parts.
- Do not block the intake/outtake ports of the Motion controller, servo amplifier and servo motor with cooling fan.
- Do not allow conductive matter such as screw or cutting chips or combustible matter such as oil enter the Motion controller, servo amplifier or servo motor.
- The Motion controller, servo amplifier and servo motor are precision machines, so do not drop or apply strong impacts on them.
- Securely fix the Motion controller, servo amplifier and servo motor to the machine according to the instruction manual. If the fixing is insufficient, these may come off during operation.
- Always install the servo motor with reduction gears in the designated direction. Failing to do so may lead to oil leaks.
- Store and use the unit in the following environmental conditions.

Environment	Conditions	
	Motion controller/Servo amplifier	Servo motor
Ambient temperature	According to each instruction manual.	0°C to +40°C (With no freezing) (32°F to +104°F)
Ambient humidity	According to each instruction manual.	80% RH or less (With no dew condensation)
Storage temperature	According to each instruction manual.	-20°C to +65°C (-4°F to +149°F)
Atmosphere	Indoors (where not subject to direct sunlight). No corrosive gases, flammable gases, oil mist or dust must exist	
Altitude	According to each instruction manual	
Vibration	According to each instruction manual	

- When coupling with the synchronous encoder or servo motor shaft end, do not apply impact such as by hitting with a hammer. Doing so may lead to detector damage.
- Do not apply a load larger than the tolerable load onto the synchronous encoder and servo motor shaft. Doing so may lead to shaft breakage.
- When not using the module for a long time, disconnect the power line from the Motion controller or servo amplifier.
- Place the Motion controller and servo amplifier in static electricity preventing vinyl bags and store.
- When storing for a long time, please contact with our sales representative.
  Also, execute a trial operation.
- When fumigants that contain halogen materials such as fluorine, chlorine, bromine, and iodine are used for disinfecting and protecting wooden packaging from insects, they cause malfunction when entering our products.
  Please take necessary precautions to ensure that remaining materials from fumigant do not enter our products, or treat packaging with methods other than fumigation (heat method).
  Additionally, disinfect and protect wood from insects before packing products.

(5) Wiring

⚠CAUTION

- Correctly and securely wire the wires. Reconfirm the connections for mistakes and the terminal screws for tightness after wiring. Failing to do so may lead to run away of the servo motor.
- After wiring, install the protective covers such as the terminal covers to the original positions.
- Do not install a phase advancing capacitor, surge absorber or radio noise filter (option FR-BIF) on the output side of the servo amplifier.
- Correctly connect the output side (terminal U, V, W) and ground. Incorrect connections will lead the servo motor to operate abnormally.
- Do not connect a commercial power supply to the servo motor, as this may lead to trouble.
- Do not mistake the direction of the surge absorbing diode installed on the DC relay for the control signal output of brake signals, etc. Incorrect installation may lead to signals not being output when trouble occurs or the protective functions not functioning.

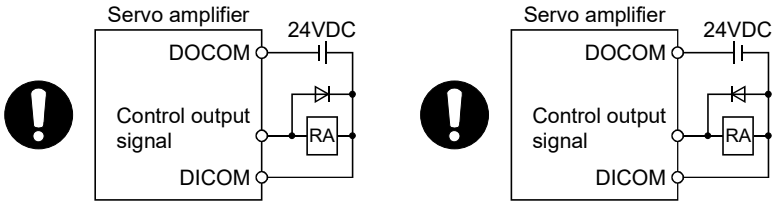

For the sink output interface　　For the source output interface

- Do not connect or disconnect the connection cables between each unit, the encoder cable or PLC expansion cable while the power is ON.
- Securely tighten the cable connector fixing screws and fixing mechanisms. Insufficient fixing may lead to the cables coming off during operation.
- Do not bundle the power line or cables.

(6) Trial operation and adjustment

⚠CAUTION

- Confirm and adjust the program and each parameter before operation. Unpredictable movements may occur depending on the machine.
- Extreme adjustments and changes may lead to unstable operation, so never make them.
- When using the absolute position system function, on starting up, and when the Motion controller or absolute position motor has been replaced, always perform a home position return.
- Before starting test operation, set the parameter speed limit value to the slowest value, and make sure that operation can be stopped immediately by the forced stop, etc. if a hazardous state occurs.

(7) Usage methods

⚠CAUTION

- Immediately turn OFF the power if smoke, abnormal sounds or odors are emitted from the Motion controller, servo amplifier or servo motor.
- Always execute a test operation before starting actual operations after the program or parameters have been changed or after maintenance and inspection.
- Do not attempt to disassemble and repair the units excluding a qualified technician whom our company recognized.
- Do not make any modifications to the unit.
- Keep the effect or electromagnetic obstacles to a minimum by installing a noise filter or by using wire shields, etc. Electromagnetic obstacles may affect the electronic devices used near the Motion controller or servo amplifier.
- When using the CE Mark-compliant equipment, refer to the User's manual for the Motion controllers and refer to the corresponding EMC guideline information for the servo amplifiers, inverters and other equipment.
- Use the units with the following conditions.

Item	Conditions
Input power	According to each instruction manual.
Input frequency	According to each instruction manual.
Tolerable momentary power failure	According to each instruction manual.

(8) Corrective actions for errors

⚠CAUTION

- If an error occurs in the self diagnosis of the Motion controller or servo amplifier, confirm the check details according to the instruction manual, and restore the operation.
- If a dangerous state is predicted in case of a power failure or product failure, use a servo motor with electromagnetic brakes or install a brake mechanism externally.
- Use a double circuit construction so that the electromagnetic brake operation circuit can be operated by emergency stop signals set externally.

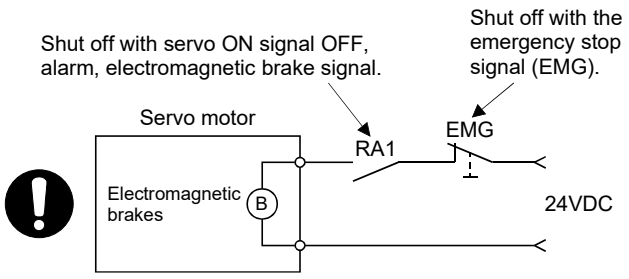

- If an error occurs, remove the cause, secure the safety and then resume operation after alarm release.
- The unit may suddenly resume operation after a power failure is restored, so do not go near the machine. (Design the machine so that personal safety can be ensured even if the machine restarts suddenly.)

(9) Maintenance, inspection and part replacement

⚠CAUTION

- Perform the daily and periodic inspections according to the instruction manual.
- Perform maintenance and inspection after backing up the program and parameters for the Motion controller and servo amplifier.
- Do not place fingers or hands in the clearance when opening or closing any opening.
- Periodically replace consumable parts such as batteries according to the instruction manual.
- Do not touch the lead sections such as ICs or the connector contacts.
- Before touching the module, always touch grounded metal, etc. to discharge static electricity from human body. Failure to do so may cause the module to fail or malfunction.
- Do not directly touch the module's conductive parts and electronic components. Touching them could cause an operation failure or give damage to the module.
- Do not place the Motion controller or servo amplifier on metal that may cause a power leakage or wood, plastic or vinyl that may cause static electricity buildup.
- Do not perform a megger test (insulation resistance measurement) during inspection.
- When replacing the Motion controller or servo amplifier, always set the new module settings correctly.
- When the Motion controller or absolute value motor has been replaced, carry out a home position return operation using one of the following methods, otherwise position displacement could occur.
  1) After writing the servo data to the Motion controller using programming software, switch on the power again, then perform a home position return operation.
  2) Using the backup function of the programming software, load the data backed up before replacement.
- After maintenance and inspections are completed, confirm that the position detection of the absolute position detector function is correct.
- Do not drop or impact the battery installed to the module. Doing so may damage the battery, causing battery liquid to leak in the battery. Do not use the dropped or impacted battery, but dispose of it.
- Do not short circuit, charge, overheat, incinerate or disassemble the batteries.
- The electrolytic capacitor will generate gas during a fault, so do not place your face near the Motion controller or servo amplifier.
- The electrolytic capacitor and fan will deteriorate. Periodically replace these to prevent secondary damage from faults. Replacements can be made by our sales representative.
- Lock the control panel and prevent access to those who are not certified to handle or install electric equipment.
- Do not burn or break a module and servo amplifier. Doing so may cause a toxic gas.

(10) About processing of waste

When you discard Motion controller, servo amplifier, a battery (primary battery) and other option articles, please follow the law of each country (area).

⚠CAUTION

- This product is not designed or manufactured to be used in equipment or systems in situations that can affect or endanger human life.
- When considering this product for operation in special applications such as machinery or systems used in passenger transportation, medical, aerospace, atomic power, electric power, or submarine repeating applications, please contact your nearest Mitsubishi Electric sales representative.
- Although this product was manufactured under conditions of strict quality control, you are strongly advised to install safety devices to forestall serious accidents when it is used in facilities where a breakdown in the product is likely to cause a serious accident.

(11) General cautions

- All drawings provided in the instruction manual show the state with the covers and safety partitions removed to explain detailed sections. When operating the product, always return the covers and partitions to the designated positions, and operate according to the instruction manual.

REVISIONS

* The manual number is given on the bottom left of the back cover.

Print Date	* Manual Number	Revision
Sep., 2007	IB(NA)-0300137-A	First edition
Nov., 2009	IB(NA)-0300137-B	[Additional model] MR-J3W-□B, MR-J3-□B-RJ080W, MR-J3-□BS [Additional correction/partial correction] Safety precautions, About Manuals, Restrictions by the software's version or serial number, Servo amplifier display servo error code (#8008+20), Amplifier-less operation status flag (SM508), SSCNET control (Status_SD508), SSCNET control (Command_SD803), Advanced S-curve acceleration/deceleration, Error code list, Warranty
Sep., 2011	IB(NA)-0300137-C	[Additional model] Q173DCPU-S1, Q172DCPU-S1, GX Works2, MR Configurator2 [Additional correction/partial correction] Safety precautions, About Manuals, Restrictions by the software's version, Error code list
Mar., 2012	IB(NA)-0300137-D	[Additional model] Q173DSCPU, Q172DSCPU, Q171ENC-W8, MR-J4-□B, MR-J4W-□B [Additional function] Speed-torque control [Additional correction/partial correction] About Manuals, Manual page organization, Restrictions by the software's version, Programming software version, PI-PID switching command (M3217+20n), Parameter error number (#8009+20n), Servo status 1 (#8010+20n), Servo status 2 (#8011+20n), Servo status 3 (#8012+20n), Maximum motion operation cycle (SD524), System setting error information (SD550, SD551), Error code list, Processing time of the Motion CPU
Sep., 2012	IB(NA)-0300137-E	[Additional correction/partial correction] About Manuals, Restrictions by the software's version, Programming software version, External forced stop input ON latch flag (SM506), Operation method (SD560), Error code list, Processing time of the Motion CPU
Apr., 2013	IB(NA)-0300137-F	[Additional correction/partial correction] About Manuals, Restrictions by the software's version, Error code list
Nov., 2013	IB(NA)-0300137-G	[Additional correction/partial correction] Safety precautions, Restrictions by the software's version, Error code list
Dec., 2015	IB(NA)-0300137-H	[Additional correction/partial correction] Restrictions by the software's version, Servo status7 (#8018+20n), Error codes stored using the Motion CPU, Warranty
Mar., 2017	IB(NA)-0300137-J	[Additional correction/partial correction] Safety precautions, Restrictions by the software's version, Error code list, Warranty
Dec., 2019	IB(NA)-0300137-K	[Additional correction/partial correction] Servo status1 (#8010+20n)

Print Date	✻ Manual Number	Revision
Apr., 2022	IB(NA)-0300137-L	[Additional model] MR-J5-☐B, MR-J5W-☐B [Additional correction/partial correction] Safety precautions, About Manuals, Restrictions by the software's version, Gain changing 2 command (M3206+20n), Servo status5 (#8014+20n), Error code list, Warranty

Japanese Manual Number IB(NA)-0300129

This manual confers no industrial property rights or any rights of any other kind, nor does it confer any patent licenses. Mitsubishi Electric Corporation cannot be held responsible for any problems involving industrial property rights which may occur as a result of using the contents noted in this manual.

© 2007 MITSUBISHI ELECTRIC CORPORATION

INTRODUCTION

Thank you for choosing the Mitsubishi Electric Motion controller Q173D(S)CPU/Q172D(S)CPU.
Before using the equipment, please read this manual carefully to develop full familiarity with the functions and performance of the Motion controller you have purchased, so as to ensure correct use.

CONTENTS

Safety Precautions ..... A- 1
Revisions A-11
Contents A-13
About Manuals A-16
Manual Page Organization A-19

1. OVERVIEW 1- 1 to 1-12

1.1 Overview 1- 1
1.2 Motion Control in SV13/SV22 Real Mode 1- 4
1.3 Motion Control in SV22 Virtual Mode 1- 5
1.4 Restrictions by the Software's Version 1- 6
1.5 Programming Software Version 1-12

2. STARTING UP THE SYSTEM 2- 1 to 2- 8

2.1 Starting Up the Virtual Mode System 2- 1
2.2 Starting Up the Incremental System and Absolute System 2- 3
2.2.1 Operation for incremental system 2- 3
2.2.2 Operation for absolute (absolute position) system 2- 4
2.3 Differences Between Real Mode and Virtual Mode 2- 5
2.3.1 Positioning data 2- 5
2.3.2 Positioning devices 2- 5
2.3.3 Servo programs 2- 6
2.3.4 Control change (Current value change/speed change/target position change) 2- 7
2.3.5 Switching of control mode (Speed-torque control) 2- 8

3. PERFORMANCE SPECIFICATIONS 3- 1 to 3- 2

4. POSITIONING DEDICATED SIGNALS 4- 1 to 4-92

4.1 Internal Relays 4- 3
4.1.1 Axis statuses 4-15
4.1.2 Axis command signals 4-23
4.1.3 Virtual servo motor axis statuses 4-28
4.1.4 Virtual servo motor axis command signals 4-32
4.1.5 Synchronous encoder axis statuses 4-37
4.1.6 Synchronous encoder axis command signals 4-38
4.1.7 Common devices 4-39
4.2 Data Registers 4-54

4.2.1 Axis monitor devices 4-62
4.2.2 Control change registers 4-64
4.2.3 Virtual servo motor axis monitor devices 4-65
4.2.4 Current value after virtual servo motor axis main shaft's differential gear 4-67
4.2.5 Synchronous encoder axis monitor devices 4-69
4.2.6 Current value after synchronous encoder axis main shaft's differential gear 4-70
4.2.7 Cam axis monitor devices 4-72
4.2.8 Common devices 4-73
4.3 Motion Registers (#) 4-76
4.4 Special Relays (SM) 4-83
4.5 Special Registers (SD) 4-86

5. MECHANICAL SYSTEM PROGRAM 5- 1 to 5-10

5.1 Mechanical Module Connection Diagram 5- 2
5.2 Mechanical Module List 5- 6

6. DRIVE MODULE 6- 1 to 6-22

6.1 Virtual Servo motor 6- 2
6.1.1 Operation description 6- 2
6.1.2 Parameter list 6- 8
6.1.3 Virtual servo motor axis devices (Internal relays, data registers) 6-13
6.2 Synchronous Encoder 6-14
6.2.1 Operation description 6-14
6.2.2 Parameter list 6-18
6.2.3 Synchronous encoder axis devices (Internal relays, data registers) 6-19
6.3 Virtual Servo motor/Synchronous Encoder Control Change 6-20
6.3.1 Virtual servo motor control change 6-20
6.3.2 Synchronous encoder control change 6-22

7. TRANSMISSION MODULE 7- 1 to 7-38

7.1 Gear 7- 3
7.1.1 Operation 7- 3
7.1.2 Parameters 7- 3
7.2 Clutch 7- 5
7.2.1 Operation 7-11
7.2.2 Parameters 7-25
7.3 Speed Change Gear 7-34
7.3.1 Operation 7-34
7.3.2 Parameters 7-35
7.4 Differential Gear 7-37
7.4.1 Operation 7-37
7.4.2 Parameters 7-37

8. OUTPUT MODULE 8- 1 to 8-42

8.1 Rollers 8- 5
8.1.1 Operation 8- 5

8.1.2 Parameter list 8- 6
8.2 Ball Screw 8- 9
8.2.1 Operation 8- 9
8.2.2 Parameter list 8-10
8.3 Rotary Tables 8-13
8.3.1 Operation 8-13
8.3.2 Parameter list 8-14
8.4 Cam 8-21
8.4.1 Operation 8-22
8.4.2 Settings items at cam data creating 8-26
8.4.3 Parameter list 8-29
8.4.4 Cam curve list 8-39
8.5 Phase Compensation Function 8-40

9. REAL MODE/VIRTUAL MODE SWITCHING AND STOP/RE-START 9- 1 to 9-12

9.1 Switching from the Real Mode to Virtual Mode 9- 1
9.2 Switching from the Virtual Mode to Real Mode 9- 5
9.2.1 Switching by user 9- 5
9.2.2 Switching by the operating system software 9- 5
9.2.3 Continuous operation on servo error in virtual mode 9- 6
9.3 Precautions at Real Mode/Virtual Mode Switching 9- 7
9.4 Stop and Re-start 9- 9
9.4.1 Stop operation/stop causes during operation and re-starting operation list 9-10

10. AUXILIARY AND APPLIED FUNCTIONS 10- 1 to 10-10

10.1 Mixed Function of Virtual Mode/Real Mode 10- 1
10.2 Speed-Torque Control 10- 7

APPENDICES APP- 1 to APP-98

APPENDIX 1 Error Codes Stored Using the Motion CPU ..... APP- 1
APPENDIX 1.1 Expression method for word data axis No. ..... APP- 4
APPENDIX 1.2 Related systems and error processing ..... APP- 5
APPENDIX 1.3 Servo program setting errors (Stored in SD517) ..... APP- 6
APPENDIX 1.4 Drive module errors APP-11
APPENDIX 1.5 Servo errors APP-17
APPENDIX 1.6 Output module errors APP-65
APPENDIX 1.7 Errors at real mode/virtual mode switching APP-75
APPENDIX 2 Setting Range for Indirect Setting Devices APP-77
APPENDIX 3 Processing Times of the Motion CPU APP-79
APPENDIX 4 Device List APP-81

About Manuals

The following manuals are also related to this product.

When necessary, order them by quoting the details in the tables below.

Related Manuals

(1) Motion controller

Manual Name	Manual Number (Model Code)
Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual This manual explains specifications of the Motion CPU modules, Q172DLX Servo external signal interface module, Q172DEX Synchronous encoder interface module, Q173DPX Manual pulse generator interface module, Power supply modules, Servo amplifiers, SSCNETⅢ cables and Synchronous encoder, and the maintenance/inspection for the system, trouble shooting and others.	IB-0300133 (1XB927)
Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON) This manual explains the Multiple CPU system configuration, performance specifications, common parameters, auxiliary/applied functions, error lists and others.	IB-0300134 (1XB928)
Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC) This manual explains the functions, programming, debugging, error lists for Motion SFC and others.	IB-0300135 (1XB929)
Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE) This manual explains the servo parameters, positioning instructions, device lists, error lists and others.	IB-0300136 (1XB930)
Q173D(S)CPU/Q172D(S)CPU Motion controller (SV22) Programming Manual (VIRTUAL MODE) This manual explains the dedicated instructions to use the synchronous control by virtual main shaft, mechanical system program create mechanical module, servo parameters, positioning instructions, device lists, error lists and others.	IB-0300137 (1XB931)
Q173DSCPU/Q172DSCPU Motion controller (SV22) Programming Manual (Advanced Synchronous Control) This manual explains the dedicated instructions to use the synchronous control by synchronous control parameters, device lists, error lists and others.	IB-0300198 (1XB953)
Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (Safety Observation) This manual explains the details, safety parameters, safety sequence program instructions, device lists and error lists and others for safety observation function by Motion controller.	IB-0300183 (1XB945)
Motion controller Setup Guidance (MT Developer2 Version1) This manual explains the items related to the setup of the Motion controller programming software MT Developer2.	IB-0300142 (—)

(2) PLC

Manual Name	Manual Number (Model Code)
QCPU User's Manual (Hardware Design, Maintenance and Inspection) This manual explains the specifications of the QCPU modules, power supply modules, base units, extension cables, memory card battery, and the maintenance/inspection for the system, trouble shooting, error codes and others.	SH-080483ENG (13JR73)
QnUCPU User's Manual (Function Explanation, Program Fundamentals) This manual explains the functions, programming methods and devices and others to create programs with the QCPU.	SH-080807ENG (13JZ27)
QCPU User's Manual (Multiple CPU System) This manual explains the Multiple CPU system overview, system configuration, I/O modules, communication between CPU modules and communication with the I/O modules or intelligent function modules.	SH-080485ENG (13JR75)
QnUCPU User's Manual (Communication via Built-in Ethernet Port) This manual explains functions for the communication via built-in Ethernet port of the CPU module.	SH-080811ENG (13JZ29)
MELSEC-Q/L Programming Manual (Common Instruction) This manual explains how to use the sequence instructions, basic instructions, application instructions and micro computer program.	SH-080809ENG (13JW10)
MELSEC-Q/L/QnA Programming Manual (PID Control Instructions) This manual explains the dedicated instructions used to exercise PID control.	SH-080040 (13JF59)
MELSEC-Q/L/QnA Programming Manual (SFC) This manual explains the system configuration, performance specifications, functions, programming, debugging, error codes and others of MELSAP3.	SH-080041 (13JF60)
I/O Module Type Building Block User's Manual This manual explains the specifications of the I/O modules, connector, connector/terminal block conversion modules and others.	SH-080042 (13JL99)
MELSEC-L SSCNETⅢ/H Head Module User's Manual This manual explains specifications of the head module, procedures before operation, system configuration, installation, wiring, settings, and troubleshooting.	SH-081152ENG (13JZ78)

(3) Servo amplifier

Manual Name	Manual Number (Model Code)
MR-J5-B/MR-J5W-B User's Manual (Introduction) This manual explains the specifications, functions, start-up procedure and others for AC Servo MR-J5-B/ MR-J5W-B Servo amplifier.	IB-0300578ENG (—)
MR-J5 User's Manual (Hardware) This manual explains the installation, wiring, use option and others for AC Servo MR-J5-B/MR-J5W-B Servo amplifier.	SH-030298ENG (—)
MR-J5 User's Manual (Function) This manual explains how to use each function required to operate the AC Servo MR-J5-B/MR-J5W-B Servo amplifier.	SH-030300ENG (—)
MR-J5 User's Manual (Adjustment) This manual explains the operation status adjustment procedure, adjustment method and others for AC Servo MR-J5-B/MR-J5W-B Servo amplifier.	SH-030306ENG (—)
MR-J5 User's Manual (Troubleshooting) This manual explains the causes of alarms, and warnings, etc. for AC Servo MR-J5-B/MR-J5W-B Servo amplifier.	SH-030312ENG (—)
MR-J5-B/MR-J5W-B User's Manual (Parameters) This manual explains the parameters for AC Servo MR-J5-B/MR-J5W-B Servo amplifier.	IB-0300581ENG (—)
SSCNETⅢ/H Interface AC Servo MR-J4-_B_(-RJ) Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for AC Servo MR-J4-_B_(-RJ) Servo amplifier.	SH-030106 (1CW805)
SSCNETⅢ/H Interface Multi-axis AC Servo MR-J4W2-_B/MR-J4W3-_B/MR-J4W2-0303B6 Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for Multi-axis AC Servo MR-J4W2-_B/MR-J4W3-_B/MR-J4W2-0303B6 Servo amplifier.	SH-030105 (1CW806)
SSCNETⅢ interface MR-J3-□B Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for MR-J3-□B Servo amplifier.	SH-030051 (1CW202)
SSCNETⅢ interface 2-axis AC Servo Amplifier MR-J3W-0303BN6/MR-J3W-□B Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for 2-axis AC Servo Amplifier MR-J3W-0303BN6/MR-J3W-□B Servo amplifier.	SH-030073 (1CW604)
SSCNETⅢ Compatible Linear Servo MR-J3-□B-RJ004U□ Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for Linear Servo MR-J3-□B-RJ004U□ Servo amplifier.	SH-030054 (1CW943)
SSCNETⅢ Compatible Fully Closed Loop Control MR-J3-□B-RJ006 Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for Fully Closed Loop Control MR-J3-□B-RJ006 Servo amplifier.	SH-030056 (1CW304)
SSCNETⅢ Interface Direct Drive Servo MR-J3-□B-RJ080W Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for Direct Drive Servo MR-J3-□B-RJ080W Servo amplifier.	SH-030079 (1CW601)

Manual Name	Manual Number (Model Code)
SSCNETⅢ interface Drive Safety integrated MR-J3-□B Safety Servo amplifier Instruction Manual This manual explains the I/O signals, parts names, parameters, start-up procedure and others for safety integrated MR-J3-□B Safety Servo amplifier.	SH-030084 (1CW205)

Manual Page Organization

The symbols used in this manual are shown below.

Symbol	Description
QDS	Symbol that indicates correspondence to only Q173DSCPU/Q172DSCPU.
QD	Symbol that indicates correspondence to only Q173DCPU(-S1)/Q172DCPU(-S1).

MEMO

1. OVERVIEW

1.1 Overview

This programming manual describes the dedicated instructions, positioning control parameters and positioning dedicated devices for mechanical system program comprised of a virtual main shaft or mechanical module required to execute the synchronous control in the Motion controller (SV22 virtual mode).
The following positioning control is possible in the Motion controller (SV22 virtual mode).

Applicable CPU	Number of positioning control axes
Q173DSCPU	Up to 32 axes
Q173DCPU (-S1)	
Q172DSCPU	Up to 16 axes
Q172DCPU (-S1)	Up to 8 axes

In this manual, the following abbreviations are used.

Generic term/Abbreviation	Description
Q173D(S)CPU/Q172D(S)CPU or Motion CPU (module)	Q173DSCPU/Q172DSCPU/Q173DCPU/Q172DCPU/Q173DCPU-S1/ Q172DCPU-S1 Motion CPU module
Q172DLX/Q172DEX/Q173DPX/ Q173DSXY or Motion module	Q172DLX Servo external signals interface module/ Q172DEX Synchronous encoder interface module(Note-1)/ Q173DPX Manual pulse generator interface module/ Q173DSXY Safety signal module
MR-J5(W)-☐B	Servo amplifier model MR-J5-☐B/MR-J5W-☐B
MR-J4(W)-☐B	Servo amplifier model MR-J4-☐B/MR-J4W-☐B
MR-J3(W)-☐B	Servo amplifier model MR-J3-☐B/MR-J3W-☐B
AMP or Servo amplifier	General name for "Servo amplifier model MR-J5-☐B/MR-J5W-☐B/MR-J4-☐B/ MR-J4W-☐B/MR-J3-☐B/MR-J3W-☐B"
QCPU, PLC CPU or PLC CPU module	QnUD(E)(H)CPU/QnUDVCPU
Multiple CPU system or Motion system	Abbreviation for "Multiple PLC system of the Q series"
CPUn	Abbreviation for "CPU No.n (n= 1 to 4) of the CPU module for the Multiple CPU system"
Operating system software	General name for "SW7DNC-SV☐Q☐/SW8DNC-SV☐Q☐"
SV13	Operating system software for conveyor assembly use (Motion SFC) : SW8DNC-SV13Q☐
SV22	Operating system software for automatic machinery use (Motion SFC) : SW8DNC-SV22Q☐
Programming software package	General name for MT Developer2/GX Works2/GX Developer/MR Configurator☐
MELSOFT MT Works2	Abbreviation for "Motion controller engineering environment MELSOFT MT Works2"
MT Developer2(Note-2)	Abbreviation for "Motion controller programming software MT Developer2 (Version 1.00A or later)"
GX Works2	Abbreviation for "Programmable controller engineering software MELSOFT GX Works2 (Version 1.15R or later)"
GX Developer	Abbreviation for "MELSEC PLC programming software package GX Developer (Version 8.48A or later)"
MR Configurator☐(Note-2)	General name for "MR Configurator/MR Configurator2"

Generic term/Abbreviation	Description
MR Configurator	Abbreviation for "Servo setup software package MR Configurator (Version C0 or later)"
MR Configurator2	Abbreviation for "Servo setup software package MR Configurator2 (Version 1.01B or later)"
Manual pulse generator or MR-HDP01	Abbreviation for "Manual pulse generator (MR-HDP01)"
Serial absolute synchronous encoder or Q171ENC-W8/Q170ENC	Abbreviation for "Serial absolute synchronous encoder (Q171ENC-W8/ Q170ENC)"
SSCNETⅢ/H(Note-3)	High speed synchronous network between Motion controller and servo amplifier
SSCNETⅢ(Note-3)	
SSCNETⅢ(/H)(Note-3)	General name for SSCNETⅢ/H, SSCNETⅢ
Absolute position system	General name for "system using the servo motor and servo amplifier for absolute position"
Battery holder unit	Battery holder unit (Q170DBATC)
Intelligent function module	General name for module that has a function other than input or output such as A/D converter module and D/A converter module.
SSCNETⅢ/H head module	Abbreviation for "MELSEC-L series SSCNETⅢ/H head module (LJ72MS15)"
Optical hub unit or MR-MV200	Abbreviation for "SSCNETⅢ/H compatible optical hub unit (MR-MV200)"

(Note-1): Q172DEX can be used in SV22.

(Note-2): This software is included in Motion controller engineering environment "MELSOFT MT Works2".

(Note-3): SSCNET: Servo System Controller NETwork

REMARK

For information about each module, design method for program and parameter, refer to the following manuals relevant to each module.

Item		Reference Manual
Motion CPU module/Motion unit		Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual
PLC CPU, peripheral devices for sequence program design, I/O modules and intelligent function module		Manual relevant to each module
Operation method for MT Developer2		Help of each software
SV13/SV22	• Multiple CPU system configuration • Performance specification • Design method for common parameter • Auxiliary and applied functions (common)	Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)
	• Design method for Motion SFC program • Design method for Motion SFC parameter • Motion dedicated PLC instruction	Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)
	• Design method for positioning control program in the real mode • Design method for positioning control parameter	Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)
	• Design method for safety observation parameter • Design method for user made safety sequence program	Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (Safety Observation)
SV22 (Advanced synchronous control)	• Design method for synchronous control parameter	Q173DSCPU/Q172DSCPU Motion controller (SV22) Programming Manual (Advanced Synchronous Control)

⚠CAUTION

- When designing the system, provide external protective and safety circuits to ensure safety in the event of trouble with the Motion controller.
- There are electronic components which are susceptible to the effects of static electricity mounted on the printed circuit board. When handling printed circuit boards with bare hands you must ground your body or the work bench.
  Do not touch current-carrying or electric parts of the equipment with bare hands.
- Make parameter settings within the ranges stated in this manual.
- Use the program instructions that are used in programs in accordance with the conditions stipulated in this manual.
- Some devices for use in programs have fixed applications: they must be used in accordance with the conditions stipulated in this manual.

1.2 Motion Control in SV13/SV22 Real Mode

(1) System with servo motor is controlled directly using the servo program in (SV13/SV22) real mode.
(2) Setting of the positioning parameter and creation of the servo program/Motion SFC program are required.
(3) The procedure of positioning control is shown below:
   1) Motion SFC program is requested to start using the D(P). SFCS instruction of the sequence program.
   (Motion SFC program can also be started automatically by parameter setting.)
   ↓
   2) Execute the positioning control using the specified Motion SFC program. (Output to the servo amplifier)
   ↓
   3) The servo motor is controlled.

Program structure in SV13/SV22 real mode

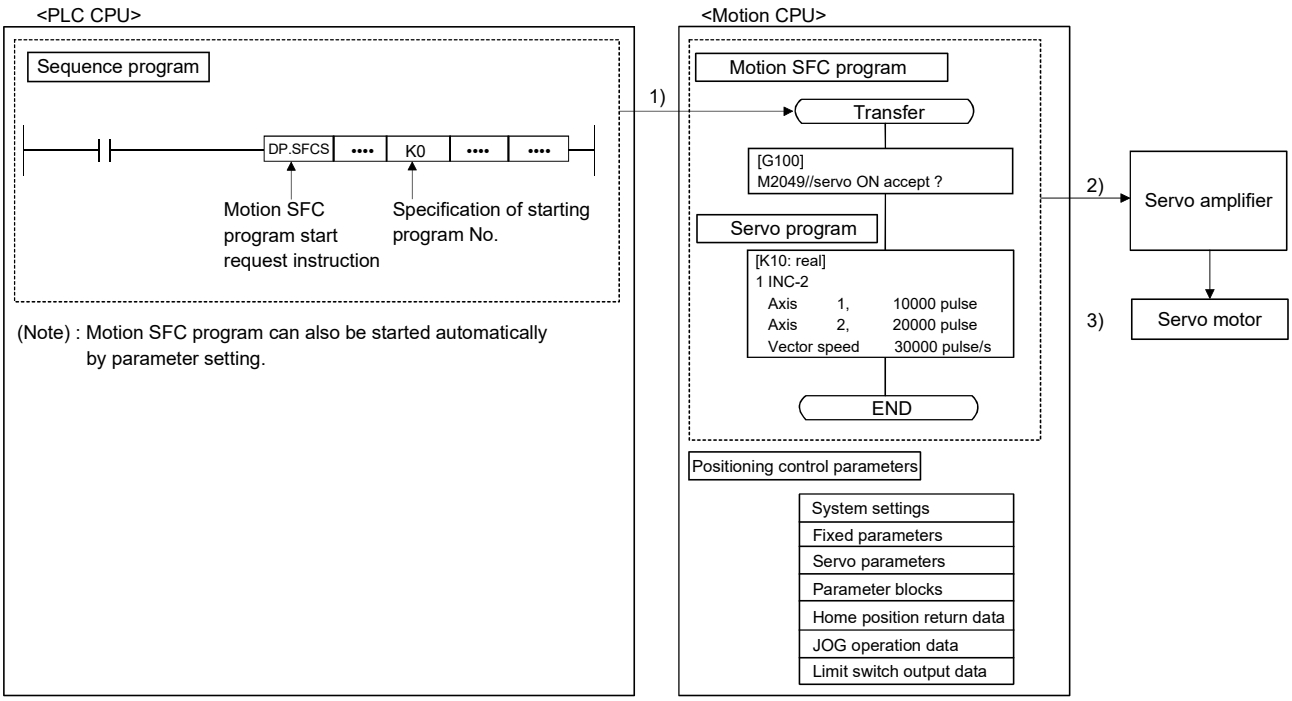

1.3 Motion Control in SV22 Virtual Mode

(1) Synchronous control with software is performed using the mechanical system program comprised by virtual main shaft and mechanical module in (SV22) virtual mode.

(2) Mechanical system programs is required in addition to the positioning parameter, servo program/Motion SFC program used in real mode.

(3) The procedure of positioning control in virtual mode is shown below:

1) Motion SFC program for virtual mode is requested to start using the D(P). SFCS instruction of the sequence program.
(Motion SFC program can also be started automatically by parameter setting.)

↓

2) The virtual servo motor of the mechanical system program is started.

↓

3) Output the operation result obtained through the transmission module to the servo amplifier set as the output module.

↓

4) The servo motor is controlled.

Program structure in SV22 virtual mode

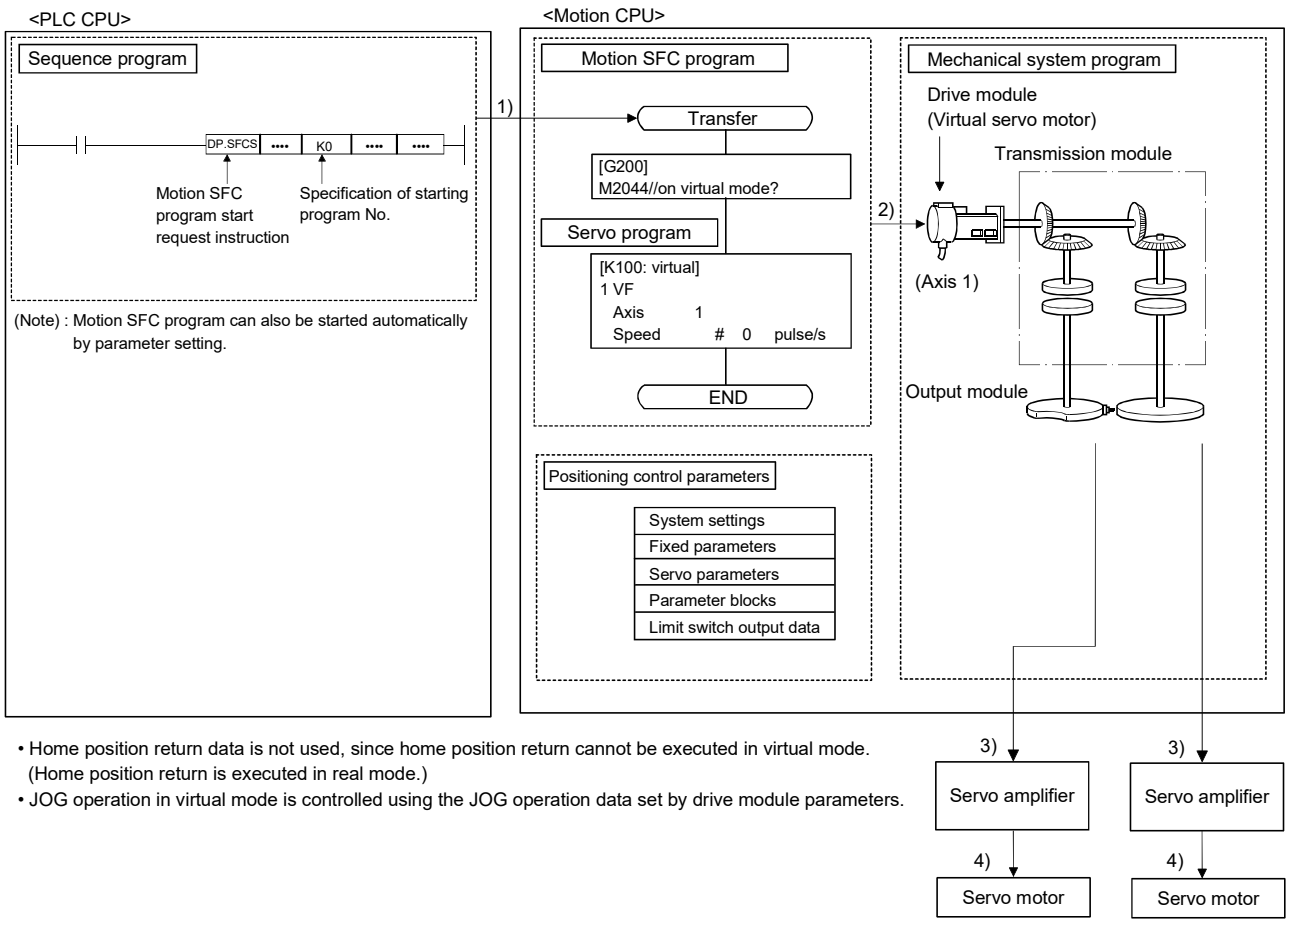

• Home position return data is not used, since home position return cannot be executed in virtual mode.
(Home position return is executed in real mode.)
• JOG operation in virtual mode is controlled using the JOG operation data set by drive module parameters.

1.4 Restrictions by the Software's Version

There are restrictions in the function that can be used by the version of the operating system software and programming software.
The combination of each version and a function is shown in Table1.1.

Table 1.1 Restrictions by the Software's Version

Function	Operating system software version (Note-1), (Note-2)		
	Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)	
Checking Motion controller's serial number and operating system software version in GX Developer	—	00D	
Advanced S-curve acceleration/deceleration (Except constant-speed control (CPSTART) of servo program.)	—	00H	
Direct drive servo MR-J3-□B-RJ080W	—	00H	
Servo amplifier display servo error code (#8008+20n)	—	00H	
0.44ms fixed-cycle event task	—	00H	
444μs coasting timer (SD720, SD721)	—	00H	
Synchronous encoder current value monitor in real mode	—	00H	
Display of the past ten times history in current value history monitor	—	00H	
Amplifier-less operation	—	00H	
Servo instruction (Home position return (ZERO), high speed oscillation (OSC)) and manual pulse generator operation in mixed function of virtual mode/real mode	—	00H	
Advanced S-curve acceleration/deceleration in constant-speed control (CPSTART) of servo program.	—	00K	
External input signal (DOG) of servo amplifier in home position return of count method and speed-position switching control	—	00G	
Communication via PERIPHERAL I/F	—	00H	
Motion SFC operation control instruction Type conversion (DFLT, SFLT)	—	00L	
Vision system dedicated function (MVOPEN, MVLOAD, MVTRG, MVPST, MVIN, MVFIN, MVCLOSE, MVCOM)	—	00L	
Home position return of scale home position signal detection method	—	00L	
Real time display function in digital oscilloscope function	—	00N	
Rapid stop deceleration time setting error invalid function	—	00S	

	Programming software version				Section of reference
	MELSOFT MT Works2 (MT Developer2)		MR Configurator2	MR Configurator	
	Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)			
	—	—	—	—	(Note-2)
	1.39R	1.06G	—	—	(Note-4)
	1.39R	1.06G	1.01B	C2	
	—	—	—	—	Section 4.3
	1.39R	1.06G	—	—	(Note-3)
	—	—	—	—	(Note-5)
	—	—	—	—	Section 6.2 Section 6.3
	1.39R	1.06G	—	—	(Note-5)
	—	—	—	—	(Note-5)
	1.39R	1.09K	—	—	Section 10.1
	1.39R	1.09K	—	—	(Note-4)
	1.39R	1.15R	—	—	
	1.39R	1.15R	—	—	(Note-5)
	1.39R	1.15R	—	—	(Note-3)
	1.39R	1.15R	—	—	(Note-3)
	1.39R	1.15R	—	—	(Note-4)
	1.39R	1.17T	—	—	
	—	—	—	—	(Note-4)

—: There is no restriction by the version.

(Note-1): SV13/SV22 is the completely same version.

(Note-2): The operating system software version can be confirmed in the operating system software (CD-ROM), MT Developer2 or GX Works2/GX Developer. (Refer to "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON) Section 1.3, 1.4".)

(Note-3): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)

(Note-4): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)

(Note-5): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)

(Note-6): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (Safety Observation)

(Note-7): Q173DSCPU/Q172DSCPU Motion controller (SV22) Programming Manual (Advanced Synchronous Control)

Table 1.1 Restrictions by the Software's Version (continued)

Function		Operating system software version (Note-1), (Note-2)		
		Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)	
Vision system dedicated function (MVOUT)		—	00S	
Motion SFC operation control instruction Program control (IF - ELSE - IEND, SELECT -CASE - SEND, FOR -NEXT, BREAK)		—	00R	
Display format depending on the error setting data information of motion error history device (#8640 to #8735)		—	00S	
Product information list device (#8736 to #8751)		—	00S	
Safety observation function		—	00S	
Feed current value update command (M3212+20n) valid in speed control (Ⅰ)		00B	Not support	
External forced stop input ON latch (SM506)		00B	00S	
Operation method (SD560)		00B	Not support	
Advanced synchronous control		00B	Not support	
Limit switch output function expansion		00B	Not support	
Driver communication function (SSCNETⅢ)		00C	Not support	
Intelligent function module support		00C	Not support	
SSCNETⅢ/H head module connection		00C	Not support	
Cam auto-generation (CAMMK) easy stroke ratio cam		00C	Not support	
Acceleration/deceleration time change function		00C	Not support	
Home position return of dogless home position signal reference method		00C	Not support	
Setting range expansion of backlash compensation amount		00C	Not support	
Multiple CPU synchronous control		00C	Not support	
Cam axis length per cycle change during synchronous control		00C	Not support	
Servo driver VCⅡ series manufactured by CKD Nikki Denso Co., Ltd.	SSCNETⅢ	—	00L	
	SSCNETⅢ/H	00D	Not support	
Inverter FR-A700 series		—	—	
Synchronous encoder via servo amplifier		00D	Not support	
Driver communication function (SSCNETⅢ/H)		00D	Not support	
Optical hub unit connection		00F	Not support	
Home position return of driver home position return method		00H	Not support	
Stepping motor module AlphaStep/5-phase manufactured by ORIENTAL MOTOR Co., Ltd.		00H	Not support	
Servo driver VPH series manufactured by CKD Nikki Denso Co., Ltd.		00H	Not support	
IAI electric actuator controller manufactured by IAI Corporation		00H	Not support	
Inverter FR-A800 series		00J	Not support	

	Programming software version				Section of reference
	MELSOFT MT Works2 (MT Developer2)		MR Configurator2	MR Configurator	
	Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)			
	1.39R	1.39R	—	—	(Note-3)
	1.39R	1.39R	—	—	(Note-3)
	—	—	—	—	(Note-3)
	—	—	—	—	Section 4.3
	1.39R	1.39R	—	—	(Note-6)
	—	Not support	—	—	(Note-4)
	—	—	—	—	(Note-5)
	—	Not support	—	—	(Note-5)
	1.47Z	Not support	—	—	(Note-7)
	1.47Z	Not support	—	—	(Note-5)
	—	Not support	—	—	(Note-5)
	1.56J	Not support	—	—	(Note-5)
	1.56J	Not support	—	—	(Note-5)
	1.56J	Not support	—	—	(Note-3)
	1.56J	Not support	—	—	(Note-4)
	1.56J	Not support	—	—	(Note-4)
	1.56J	Not support	—	—	(Note-4)
	1.56J	Not support	—	—	(Note-7)
	1.56J	Not support	—	—	(Note-7)
	1.34L	1.15R	—	—	(Note-4)
	1.56J	Not support	—	—	(Note-4)
	1.34L	1.15R	—	—	(Note-4)
	1.68W	Not support	1.23Z	Not support	(Note-7)
	1.68W	Not support	1.23Z	Not support	(Note-5)
	—	Not support	—	—	(Note-4)
	1.118Y	Not support	—	—	(Note-4)
	1.118Y	Not support	—	—	(Note-4)
	1.118Y	Not support	—	—	(Note-4)
	1.118Y	Not support	—	—	(Note-4)
	1.120A	Not support	—	—	(Note-4)

—: There is no restriction by the version.

(Note-1): SV13/SV22 is the completely same version.

(Note-2): The operating system software version can be confirmed in the operating system software (CD-ROM), MT Developer2 or GX Works2/GX Developer. (Refer to "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON) Section 1.3, 1.4".)

(Note-3): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)

(Note-4): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)

(Note-5): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)

(Note-6): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (Safety Observation)

(Note-7): Q173DSCPU/Q172DSCPU Motion controller (SV22) Programming Manual (Advanced Synchronous Control)

Table 1.1 Restrictions by the Software's Version (continued)

Function	Operating system software version (Note-1), (Note-2)		
	Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)	
Improvement of absolute positioning operation for servo driver VCⅡ/VPH series manufactured by CKD Nikki Denso Co., Ltd., and stepping motor module AlphaStep/5-phase manufactured by ORIENTAL MOTOR Co., Ltd.	00L	Not support	
Servo amplifier MR-J5(W)-□B support	00Y	Not support	
DOG/CHANGE signal input method support	00Y	Not support	

	Programming software version				Section of reference
	MELSOFT MT Works2 (MT Developer2)		MR Configurator2	MR Configurator	
	Q173DSCPU/Q172DSCPU	Q173DCPU(-S1)/Q172DCPU(-S1)			
	—	Not support	—	—	(Note-4)
	1.170C	Not support	1.130L	Not support	
	1.170C	Not support	—	—	(Note-5)

—: There is no restriction by the version.

(Note-1): SV13/SV22 is the completely same version.

(Note-2): The operating system software version can be confirmed in the operating system software (CD-ROM), MT Developer2 or GX Works2/GX Developer. (Refer to "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON) Section 1.3, 1.4".)

(Note-3): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)

(Note-4): Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)

(Note-5): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)

(Note-6): Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (Safety Observation)

(Note-7): Q173DSCPU/Q172DSCPU Motion controller (SV22) Programming Manual (Advanced Synchronous Control)

1.5 Programming Software Version

The programming software versions that support Motion CPU are shown below.

Motion CPU	MELSOFT MT Works2 (MT Developer2)		MR Configurator2	MR Configurator
	SV13/SV22	SV43		
Q173DSCPU	1.39R (Note-1)		1.10L	Not support
Q172DSCPU	1.39R (Note-1)		1.10L	Not support
Q173DCPU-S1	1.00A (Note-2)	1.03D (Note-3)	1.00A	C0 (Note-4)
Q172DCPU-S1	1.00A (Note-2)	1.03D (Note-3)	1.00A	C0 (Note-4)
Q173DCPU	1.00A	1.03D	1.00A	C0 (Note-4)
Q172DCPU	1.00A	1.03D	1.00A	C0 (Note-4)

(Note-1): Use version 1.47Z or later to use advanced synchronous control method.
(Note-2): Use version 1.12N or later to communicate via PERIPHERAL I/F.
(Note-3): Use version 1.23Z or later to communicate via PERIPHERAL I/F.
(Note-4): Use version C1 or later to use MR Configurator combination with MT Developer2.

2. STARTING UP THE SYSTEM

The procedure for virtual mode positioning control is shown below.

2.1 Starting Up the Virtual Mode System

The procedure to start up for virtual mode system is shown below.

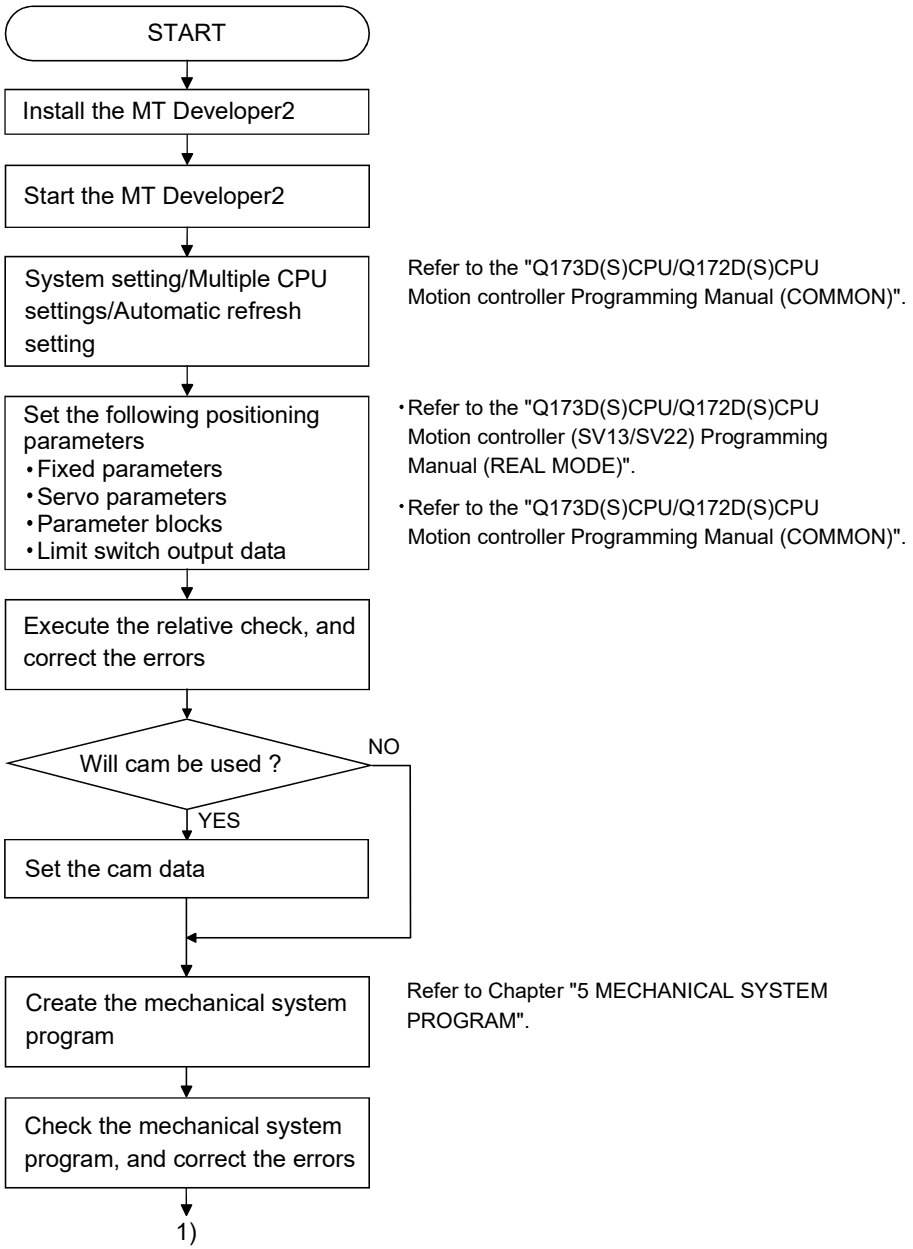

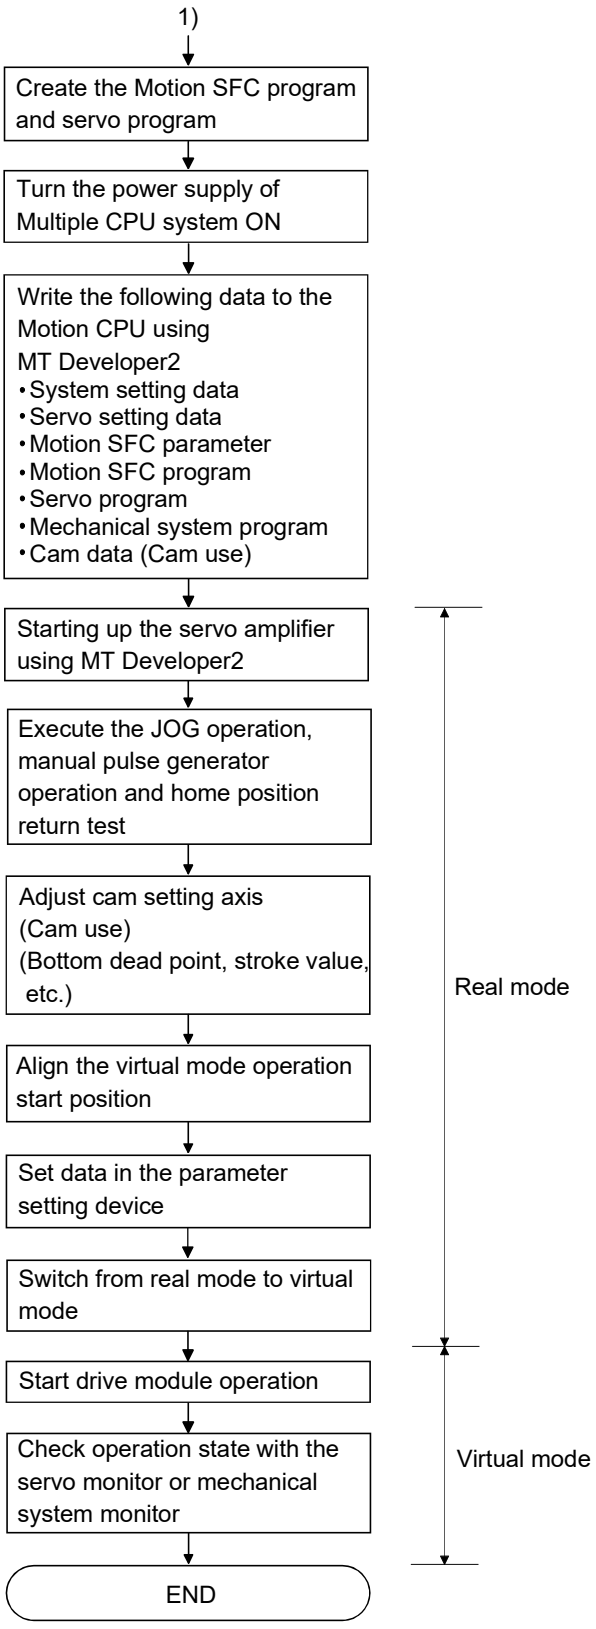
1)
Create the Motion SFC program and servo program
Turn the power supply of Multiple CPU system ON
Write the following data to the Motion CPU using MT Developer2
•System setting data
•Servo setting data
•Motion SFC parameter
•Motion SFC program
•Servo program
•Mechanical system program
•Cam data (Cam use)
Starting up the servo amplifier using MT Developer2
Execute the JOG operation, manual pulse generator operation and home position return test
Adjust cam setting axis (Cam use) (Bottom dead point, stroke value, etc.)
Align the virtual mode operation start position
Set data in the parameter setting device
Switch from real mode to virtual mode
Start drive module operation
Check operation state with the servo monitor or mechanical system monitor
END
Real mode
Virtual mode

2.2 Starting Up the Incremental System and Absolute System

When incremental system or absolute system is used, the procedure for virtual mode operation is shown below.

2.2.1 Operation for incremental system

The operation procedure for incremental system is shown below.

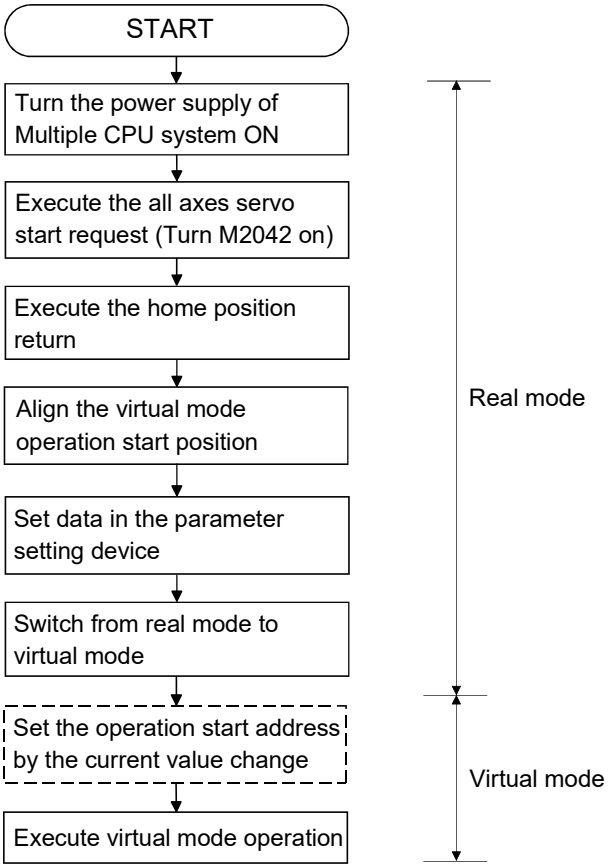

2.2.2 Operation for absolute (absolute position) system

The operation procedure for absolute system is shown below.

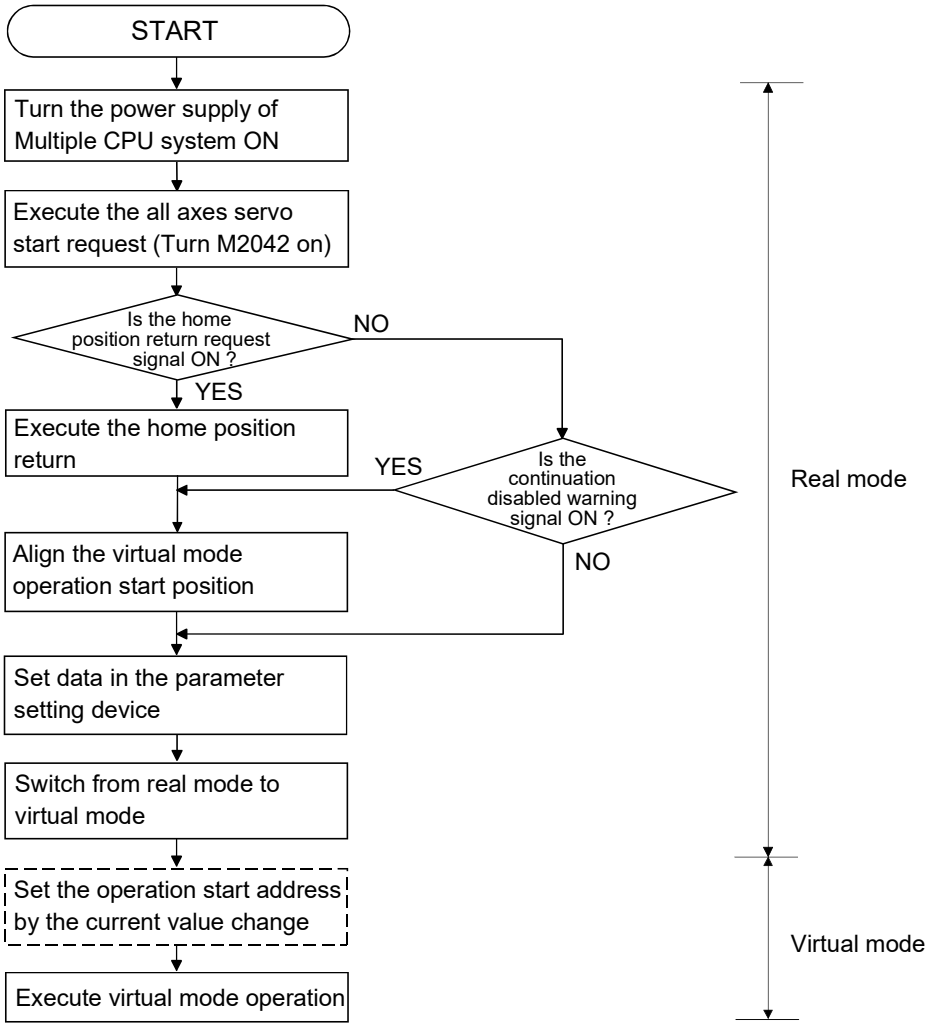

2.3 Differences Between Real Mode and Virtual Mode

Specifications of the positioning data, positioning devices and servo programs, etc. used in the real mode differ in part in the virtual mode.
When using them in the virtual mode, refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" after checking about a different point in the real mode.

2.3.1 Positioning data

Positioning data used in the virtual mode are shown in Table 2.1 below.

Table 2.1 Positioning Data List

Item	Real mode	Virtual mode	Remark
System settings	○	○	
Fixed parameters	○	△	Usable units differ according to the output module.
Servo parameters	○	○	
Parameter blocks	○	△	Only [pulse] usable.
Home position return data	○	—	
JOG operation data	○	—	
Limit switch output data	○	△	

○ : Used
△ : Used (Restrictions in part)
— : Not used

(Note): Refer to Section 10.1 for the real mode axis at virtual mode.

2.3.2 Positioning devices

The operating ranges of positioning devices used in virtual mode are shown in Table 2.2 below.

Table 2.2 Operating Range of Positioning Devices

Device name	Real mode	Virtual mode
Internal relays	M2000 to M3839 M4640 to M4687 M5440 to M5487	M2000 to M5487
Special relays	SM0 to SM2255	
Data registers	D0 to D799 D1120 to D1239	D0 to D1559
Motion registers	#8000 to #8751	
Special registers	SD0 to SD2255	

2.3.3 Servo programs

(1) Servo program area

(a) The same servo program (Kn) No. cannot be used in both the real mode and virtual modes. The range of servo program (Kn) used in the virtual mode must be set using MT Developer2 in advance.

(2) Servo instructions

(a) The home position return, speed control (Ⅱ), speed-position switching control, high-speed oscillation control and speed control with fixed position stop among the controls which can be used in the real mode cannot be used in the virtual mode.

(b) Control units of the parameter block and the torque limit value among the positioning data which can be set using the servo program are not used.

(3) Differences of the servo instruction between real mode and virtual mode are shown in Table 2.3 below.

Table 2.3 Differences of Servo Instruction List

Item			Real mode	Virtual mode	Remark
Servo instruction	Speed-position switching control	VPF	○	×	
		VPR			
		VPSTART			
	Speed control (Ⅱ)	VVF	○	×	
		VVR			
	Home position return	ZERO	○	×	Switch to virtual mode after home position return in the real mode.
	High-speed oscillation	OSC	○	×	
	Speed control with fixed position stop	PVF	○	×	
		PVR			
Positioning data	Parameter block	Control units	○	Fixed as [pulse]	
		Torque limit value	○	−	The torque limit value is set with the "output module parameter".

○ : Used, × : Unusable, − : Not used

(Note-1): Instruction not listed in the table above are common instructions in real mode and virtual mode.

(Note-2): Refer to Section 10.1 for the real mode axis at virtual mode.

2.3.4 Control change (Current value change/speed change/target position change)

When a control change is executed in the virtual mode, the feed current value/speed of the drive module is changed.
Control changes are not possible for the output module (except for cam).
Differences between control changes in the real mode and virtual modes are shown in Table 2.4 below.

Table 2.4 Differences List of Control Change

Item	Real mode		Virtual mode					
			Drive module		Output module			
	Servo motor	Synchronous encoder	Virtual servo motor	Synchronous encoder	Roller	Ball screw	Rotary table	Cam
Current value change	○	○ Ver.!	○	○	×	×	×	○
Speed change	○	×	○	×	× (Note-1)			
Target position change QDS	○	×	○	×	×			

○ : Used, × : Unusable

(Note-1): If the output module is a roller which uses a speed change gear, a speed change can be executed by changing the speed change gear ratio.

REMARK

Refer to the following Chapters for details of the drive and output modules.
- Drive module : Chapter 5 and 6
- Output module : Chapter 5 and 8

Ver.! : Refer to Section 1.4 for the software version that supports this function.

2.3.5 Switching of control mode (Speed-torque control) QDS

When a speed-torque control is executed in the virtual mode, the control mode of the output module (except for cam) and real mode axis is switched.
Differences between speed-torque control in the real mode and virtual modes are shown in Table 2.5 below.

Table 2.5 Differences List of Control Mode Switching

Item	Real mode		Virtual mode						
			Drive module		Output module				
	Servo motor	Synchronous encoder	Virtual servo motor	Synchronous encoder	Roller	Ball screw	Rotary table	Cam	Real mode axis
Speed-torque control	○	×	×	×	○	○	○	×	○

○ : Used, × : Unusable

REMARK

Refer to the Section 10.2 for details of the speed-torque control in virtual mode.

3. PERFORMANCE SPECIFICATIONS

Performance specifications of the Motion CPU are shown in Table 3.1 below.

Table 3.1 Motion CPU Performance Specifications (Virtual Mode)

Item			Q173DSCPU	Q172DSCPU	Q173DCPU(-S1)	Q172DCPU(-S1)
Number of control axes			Up to 32 axes (Simultaneous: 2 to 4/ Independent: 32 axes)	Up to 16 axes (Simultaneous: 2 to 4/ Independent: 16 axes)	Up to 32 axes (Simultaneous: 2 to 4/ Independent: 32 axes)	Up to 8 axes (Simultaneous: 2 to 4/ Independent: 8 axes)
Control method			Synchronous control, PTP (Point to Point) control, speed control, fixed-pitch feed, constant-speed control, position follow-up control, speed-switching control, speed-torque control		Synchronous control, PTP (Point to Point) control, speed control, fixed-pitch feed, constant-speed control, position follow-up control, speed-switching control	
Control units	Drive module	Virtual servo motor	pulse			
		Synchronous encoder				
	Output module	Roller	mm, inch			
		Ball screw				
		Rotary table	Fixed as "degree"			
		Cam	mm, inch, degree, pulse		mm, inch, pulse	
Program language			Dedicated instructions (Servo program + mechanical system program)			
Servo program		Capacity	16k steps (16384 steps) (Note-2)			
		Number of positioning points	Total of 3200 points (It changes with programs, indirect specification is possible.)			
Mechanical system program	Number of modules which can be set per CPU: Drive module	Virtual servo motor	32 axes	16 axes	32 axes	8 axes
		Synchronous encoder	12 axes	12 axes	12 axes	8 axes
	Virtual axis	Virtual main shaft	32	16	32	8
		Virtual auxiliary input axis	32	16	32	8
	Transmission module	Gear	64	32	64	16
		Clutch (Note-1)	64	32	64	16
		Speed change gear	64	32	64	16
		Differential gear	32	16	32	8
		Differential gear to main shaft	32	16	32	8
	Output module	Roller	32 (Total 32)	16 (Total 16)	32 (Total 32)	8 (Total 8)
		Ball screw	32	16	32	8
		Rotary table	32	16	32	8
		Cam	32	16	32	8
Cam	Types		Up to 256 (Note-3)			
	Resolution per cycle		256 • 512 • 1024 • 2048 (Note-3)			
	Memory capacity		132k bytes			
	Storage memory for cam data		CPU internal RAM memory			
	Stroke resolution		32767			
	Control mode		Two-way cam/feed cam			

Table 3.1 Motion CPU Performance Specifications (Virtual Mode) (Continued)

<table>
<tr><th colspan="3">Item</th><th>Q173DSCPU</th><th>Q172DSCPU</th><th>Q173DCPU(-S1)</th><th>Q172DCPU(-S1)</th></tr>
<tr><td rowspan="9">Virtual servo motor</td><td colspan="2">Interpolation functions</td><td colspan="4">Linear interpolation (2 to 4 axes), circular interpolation (2 axes)</td></tr>
<tr><td colspan="2">Control methods</td><td colspan="4">PTP (Point to Point) control, speed control, fixed-pitch feed, constant-speed control,
position follow-up control</td></tr>
<tr><td rowspan="3">Positioning</td><td>Method</td><td colspan="4">PTP control : Selection of absolute or incremental data method
Fixed-pitch feed : Incremental data method
Constant-speed control : Both absolute and incremental data method can be used together
Position follow-up control : Absolute data method</td></tr>
<tr><td>Position command</td><td colspan="4">Address setting range : –2147483648 to 2147483647 [pulse]</td></tr>
<tr><td>Speed command</td><td colspan="4">Speed setting range : 1 to 2147483647 [pulse/s]</td></tr>
<tr><td rowspan="3">Acceleration/
deceleration
control</td><td>Trapezoidal
acceleration/
deceleration</td><td colspan="4"><table><tr><th>Acceleration-fixed acceleration/deceleration</th><th>Time-fixed acceleration/deceleration</th></tr><tr><td>Acceleration time : 1 to 65535 [ms]</td><td rowspan="2">Acceleration/deceleration time: 1 to 5000 [ms]
(Only constant-speed control is possible.)</td></tr><tr><td>Deceleration time : 1 to 65535 [ms]</td></tr></table></td></tr>
<tr><td>S-curve
acceleration/
deceleration</td><td colspan="4">S-curve ratio: 0 to 100[%]</td></tr>
<tr><td>Advanced S-curve
acceleration/
deceleration</td><td colspan="4">Acceleration section ratio: 0.0 to 100.0[%]
Deceleration section ratio: 0.0 to 100.0[%]</td></tr>
<tr><td colspan="2">JOG operation function</td><td colspan="4">Provided</td></tr>
<tr><td colspan="2">M-code function</td><td colspan="4">M-code output function provided, M-code complete wait function provided</td></tr>
<tr><td colspan="2">Manual pulse generator operation function
(Test mode only)</td><td colspan="4">Up to 3 units can be connected.
Up to 3 axes can be operated simultaneously.
Setting of magnification : 1 to 10000
Setting of smoothing magnification provided.</td></tr>
</table>

(Note-1): When the TREN input signal is used as "external input mode clutch", the high speed reading function cannot be used.

(Note-2): Capacity matching the servo program for real mode.

(Note-3): Relation between a resolution per cycle of cam and type are shown below.

Resolution per cycle	256	512	1024	2048
Type	256	128	64	32

4. POSITIONING DEDICATED SIGNALS

The internal signals of the Motion CPU and the external signals to the Motion CPU are used as positioning signals.

(1) Internal signals

The following five devices of the Motion CPU are used as the internal signals of the Motion CPU.

- Internal relay (M) ..... M2000 to M5487 (3488 points)
- Special relay (SM) ..... SM0 to SM2255 (2256 points)
- Data register (D) ..... D0 to D1599 (1600 points)
- Motion register (#) ..... #8000 to #8751 (752 points)
- Special register (SD) ..... SD0 to SD2255 (2256 points)

(2) External signals

The external input signals to the Motion CPU are shown below.

- Upper/lower limit switch input ..... The upper/lower limit of the positioning range is controlled.
- Stop signal ..... This signal makes the starting axis stop.
- Proximity dog signal ..... ON/OFF signal from the proximity dog.
- Speed/position switching signal ..... Signal for switching from speed to position.
- Manual pulse generator input ..... Signal from the manual pulse generator.

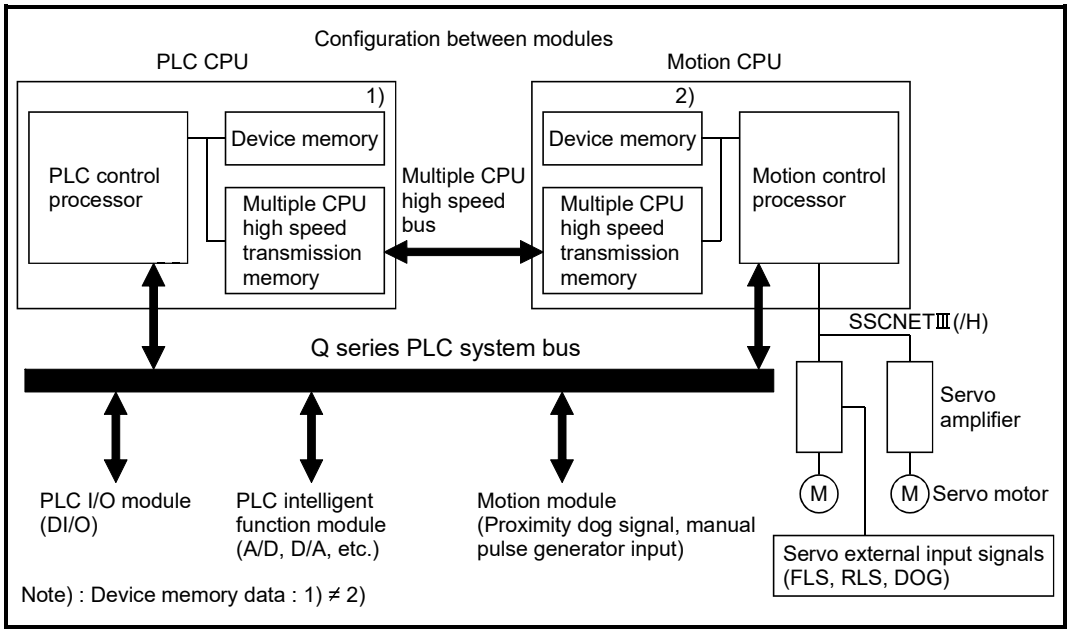

Fig.4.1 Flow of the internal signals/external signals

The positioning dedicated devices are shown below.
It indicates the device refresh cycle of the Motion CPU for status signal with the positioning control, and the device fetch cycle of the Motion CPU for command signal with the positioning control.
The operation cycle and main cycle of the Motion CPU are shown below.

(a) Operation cycle

Item		Q173DSCPU	Q172DSCPU	Q173DCPU(-S1)	Q172DCPU(-S1)
Number of control axes		Up to 32 axes	Up to 16 axes	Up to 32 axes	Up to 8 axes
Operation cycle (Default)	SV22	0.44ms/ 1 to 6 axes 0.88ms/ 7 to 16 axes 1.77ms/ 17 to 32 axes	0.44ms/ 1 to 6 axes 0.88ms/ 7 to 16 axes	0.44ms/ 1 to 4 axes 0.88ms/ 5 to 12 axes 1.77ms/ 13 to 28 axes 3.55ms/ 29 to 32 axes	0.44ms/ 1 to 4 axes 0.88ms/ 5 to 8 axes

(b) Main cycle is not fixed-cycle as operation cycle. The cycle is dozens[ms] to hundreds[ms].

REMARK

(1) In the positioning dedicated signals, "n" in "M3200+20n", etc. indicates a value corresponding to axis No. such as the following tables.

Axis No.	n	Axis No.	n	Axis No.	n	Axis No.	n
1	0	9	8	17	16	25	24
2	1	10	9	18	17	26	25
3	2	11	10	19	18	27	26
4	3	12	11	20	19	28	27
5	4	13	12	21	20	29	28
6	5	14	13	22	21	30	29
7	6	15	14	23	22	31	30
8	7	16	15	24	23	32	31

• Calculate as follows for the device No. corresponding to each axis.
(Example) For axis 32 M3200+20n (Stop command)=M3200+20×31=M3820
M3215+20n (Servo OFF command)=M3215+20×31=M3835
• The following range is valid.
• Q172DSCPU : Axis No.1 to 16 (n=0 to 16)
• Q172DCPU(-S1) : Axis No.1 to 8 (n=0 to 7)

(2) In the positioning dedicated signals, "n" in "M4640+4n", etc. of the "Synchronous encoder axis status", "Synchronous encoder axis command signal" and "Synchronous encoder axis monitor device" indicates a value corresponding to synchronous encoder No. such as the following tables.

Synchronous encoder No.	n	Synchronous encoder No.	n	Synchronous encoder No.	n
P1	0	P5	4	P9	8
P2	1	P6	5	P10	9
P3	2	P7	6	P11	10
P4	3	P8	7	P12	11

• Calculate as follows for the device No. corresponding to each synchronous encoder.
(Example) For synchronous encoder No.12
M4640+4n (Error detection)= M4640+4×11=M4684
D1122+10n (Minor error code)= D1122+10×11= D1232
• The range (n=0 to 7) of synchronous encoder No. P1 to P8 is valid in the Q172DCPU(-S1).

4.1 Internal Relays

(1) Internal relay list

SV22				
Device No.	Application	Real	Virtual	
M0 to	User device (2000 points)			
M2000 to	Common device (320 points)	○	○	Real/virtual community
M2320 to	Unusable (80 points)	—	—	
M2400 to	Axis status (20 points × 32 axes) Real mode : Each axis Virtual mode : Output module	○	○	
M3040 to	Unusable (32 points)	—	—	
M3072 to	Common device (Command signal) (64 points)	○	○	
M3136 to	Unusable (64 points)	—	—	
M3200 to	Axis command signal (20 points × 32 axes) Real mode : Each axis Virtual mode : Output module	○	○	
M3840 to	Unusable (160 points)	—	—	
M4000 (Note-1) to	Virtual servo motor axis status (20 points × 32 axes) (Note-2)	Backup	○	Virtual
M4640 (Note-1) to	Synchronous encoder axis status (4 points × 12 axes)	○	○	
M4688 (Note-1) to	Unusable (112 points)	—	—	
M4800 (Note-1) to	Virtual servo motor axis command signal (20 points × 32 axes) (Note-2)	×	○	
M5440 (Note-1) to	Synchronous encoder axis command signal (4 points × 12 axes)	× (Note-4)	○	
M5488 to M8191	User device (Note-3) (2704 points)			

○ : Valid, × : Invalid

□ It can be used as a user device.

POINT

(1) Total number of user device points
4704 points

(2) (Note-1): Do not set M4000 to M5487 as the latch range in virtual mode.

(3) (Note-2): This signal occupies only the area of the axis set in the mechanical system program. The unused axis areas in the mechanical system program can be used as a user device.

(4) (Note-3): The cam axis command signal and smoothing clutch complete signal can be set as the optional device at the parameter.

(5) (Note-4): It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

(6) This manual describes only details for internal relays used in the virtual mode. If it is required, refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)".

(2) Axis status list

Axis No.	Device No.
1	M2400 to M2419
2	M2420 to M2439
3	M2440 to M2459
4	M2460 to M2479
5	M2480 to M2499
6	M2500 to M2519
7	M2520 to M2539
8	M2540 to M2559
9	M2560 to M2579
10	M2580 to M2599
11	M2600 to M2619
12	M2620 to M2639
13	M2640 to M2659
14	M2660 to M2679
15	M2680 to M2699
16	M2700 to M2719
17	M2720 to M2739
18	M2740 to M2759
19	M2760 to M2779
20	M2780 to M2799
21	M2800 to M2819
22	M2820 to M2839
23	M2840 to M2859
24	M2860 to M2879
25	M2880 to M2899
26	M2900 to M2919
27	M2920 to M2939
28	M2940 to M2959
29	M2960 to M2979
30	M2980 to M2999
31	M3000 to M3019
32	M3020 to M3039

Signal name

	Signal name	Real	Virtual				Real Mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Positioning start complete	○	OFF				○	Operation cycle	／	Status signal
1	Positioning complete									
2	In-position		○							
3	Command in-position		OFF							
4	Speed controlling									
5	Speed / position switching latch									
6	Zero pass		○							
7	Error detection							Immediately		
8	Servo error detection							Operation cycle		
9	Home position return request							Main cycle		
10	Home position return complete							Operation cycle		
11	External signals FLS							Main cycle		
12	External signals RLS									
13	External signals STOP									
14	External signals DOG/CHANGE									
15	Servo ready							Operation cycle		
16	Torque limiting									
17	Unusable	—	—				—	—	—	—
18	Virtual mode continuation operation disable warning (Note-1)	○	○				○	At virtual mode transition	／	Status signal
19	M-code outputting		OFF					Operation cycle		

○ : Valid

(Note-1): It is unusable in the SV22 real mode.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(3) Axis command signal list

Axis No.	Device No.
1	M3200 to M3219
2	M3220 to M3239
3	M3240 to M3259
4	M3260 to M3279
5	M3280 to M3299
6	M3300 to M3319
7	M3320 to M3339
8	M3340 to M3359
9	M3360 to M3379
10	M3380 to M3399
11	M3400 to M3419
12	M3420 to M3439
13	M3440 to M3459
14	M3460 to M3479
15	M3480 to M3499
16	M3500 to M3519
17	M3520 to M3539
18	M3540 to M3559
19	M3560 to M3579
20	M3580 to M3599
21	M3600 to M3619
22	M3620 to M3639
23	M3640 to M3659
24	M3660 to M3679
25	M3680 to M3699
26	M3700 to M3719
27	M3720 to M3739
28	M3740 to M3759
29	M3760 to M3779
30	M3780 to M3799
31	M3800 to M3819
32	M3820 to M3839

Signal name

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Stop command	○	×				○		Operation cycle	Command signal
1	Rapid stop command									
2	Forward rotation JOG start command								Main cycle	
3	Reverse rotation JOG start command									
4	Complete signal OFF command									
5	Speed/position switching enable command								Operation cycle	
6	Gain changing 2 command (Note-1) QDS Ver.!		○						Operation cycle (Note-2)	
7	Error reset command								Main cycle	
8	Servo error reset command									
9	External stop input disable at start command		×						At start	
10	Unusable	—	—				—	—	—	—
11										
12	Feed current value update command	○	×				○		At start	Command signal
13	Address clutch reference setting command (Note-3)	×	×		○		×		At virtual mode transition	
14	Cam reference position setting command (Note-3)		×			○				
15	Servo OFF command	○	○				○		Operation cycle	
16	Gain changing command									
17	PI-PID switching command QDS								Operation cycle (Note-2)	
18	Control loop changing command								Operation cycle	
19	FIN signal		×							

○ : Valid, × : Invalid

(Note-1): Servo amplifier (MR-J5(W)-□B) only.
(Note-2): It is unusable in the SV22 real mode.
(Note-3): Operation cycle 7.1[ms] or more: Every 3.5[ms]

Ver.! : Refer to Section 1.4 for the software version that supports this function.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(4) Virtual servo motor axis status list

Axis No.	Device No.	Signal name
1	M4000 to M4019	
2	M4020 to M4039	
3	M4040 to M4059	
4	M4060 to M4079	
5	M4080 to M4099	
6	M4100 to M4119	
7	M4120 to M4139	
8	M4140 to M4159	
9	M4160 to M4179	
10	M4180 to M4199	
11	M4200 to M4219	
12	M4220 to M4239	
13	M4240 to M4259	
14	M4260 to M4279	
15	M4280 to M4299	
16	M4300 to M4319	
17	M4320 to M4339	
18	M4340 to M4359	
19	M4360 to M4379	
20	M4380 to M4399	
21	M4400 to M4419	
22	M4420 to M4439	
23	M4440 to M4459	
24	M4460 to M4479	
25	M4480 to M4499	
26	M4500 to M4519	
27	M4520 to M4539	
28	M4540 to M4559	
29	M4560 to M4579	
30	M4580 to M4599	
31	M4600 to M4619	
32	M4620 to M4639	

	Signal name	Real	Virtual					Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam	Real mode axis			
0	Positioning start complete	Backup	○				×	Operation cycle		Status signal
1	Positioning complete									
2	Unusable	—	—				—	—	—	—
3	Command in-position	Backup	○				×	Operation cycle		Status signal
4	Speed controlling									
5	Unusable	—	—				—	—	—	—
6										
7	Error detection	Backup	○				×	Immedi-ately		Status signal
8	Unusable	—	—				—	—	—	—
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19	M-code outputting	Backup	○				×	Operation cycle		Status signal

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(5) Virtual servo motor axis command signal list

Axis No.	Device No.	Signal name										
1	M4800 to M4819											
2	M4820 to M4839											
3	M4840 to M4859											
4	M4860 to M4879											
5	M4880 to M4899											
6	M4900 to M4919	0	Stop command	×	○				×		Operation cycle	Command signal
7	M4920 to M4939	1	Rapid stop command									
8	M4940 to M4959	2	Forward rotation JOG start command								Main cycle	
9	M4960 to M4979											
10	M4980 to M4999	3	Reverse rotation JOG start command									
11	M5000 to M5019											
12	M5020 to M5039	4	Complete signal OFF command									
13	M5040 to M5059											
14	M5060 to M5079	5	Unusable	—	—				—	—	—	—
15	M5080 to M5099	6										
16	M5100 to M5119	7	Error reset command	×	○				×		Main cycle	Command signal
17	M5120 to M5139											
18	M5140 to M5159	8	Unusable	—	—				—	—	—	—
19	M5160 to M5179	9	External stop input disable at start command	×	○				×		At start	Command signal
20	M5180 to M5199											
21	M5200 to M5219											
22	M5220 to M5239	10	Unusable	—	—				—	—	—	—
23	M5240 to M5259	11										
24	M5260 to M5279	12										
25	M5280 to M5299	13										
26	M5300 to M5319	14										
27	M5320 to M5339	15										
28	M5340 to M5359	16										
29	M5360 to M5379	17										
30	M5380 to M5399	18										
31	M5400 to M5419	19	FIN signal	×	○				×		Operation cycle	Command signal
32	M5420 to M5439											

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(6) Synchronous encoder axis status list

Axis No.	Device No.
1	M4640 to M4643
2	M4644 to M4647
3	M4648 to M4651
4	M4652 to M4655
5	M4656 to M4659
6	M4660 to M4663
7	M4664 to M4667
8	M4668 to M4671
9	M4672 to M4675
10	M4676 to M4679
11	M4680 to M4683
12	M4684 to M4687

Signal name

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Error detection	○	○	Immediately		Status signal
1	External signal TREN			Main cycle		
2	Virtual mode continuation operation disable warning					
3	Unusable	—	—	—	—	—

○ : Valid

POINT

(1) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(2) The device area of 9 axes or more can be used as a user device in the Q172DCPU (-S1).
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/ Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(7) Synchronous encoder axis command signal list

Axis No.	Device No.
1	M5440 to M5443
2	M5444 to M5447
3	M5448 to M5451
4	M5452 to M5455
5	M5456 to M5459
6	M5460 to M5463
7	M5464 to M5467
8	M5468 to M5471
9	M5472 to M5475
10	M5476 to M5479
11	M5480 to M5483
12	M5484 to M5487

Signal name

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Error reset	× (Note-1)	○		Main cycle	Status signal
1	Unusable	—	—	—	—	—
2						
3						

○ : Valid, × : Invalid

(Note-1): It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

POINT

(1) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(2) The device area of 9 axes or more can be used as a user device in the Q172DCPU (-S1).
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/ Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(8) Common device list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2000	PLC ready flag		Main cycle	Command signal	M3072
M2001	Axis 1	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2002	Axis 2				
M2003	Axis 3				
M2004	Axis 4				
M2005	Axis 5				
M2006	Axis 6				
M2007	Axis 7				
M2008	Axis 8				
M2009	Axis 9				
M2010	Axis 10				
M2011	Axis 11				
M2012	Axis 12				
M2013	Axis 13				
M2014	Axis 14				
M2015	Axis 15				
M2016	Axis 16				
M2017	Axis 17				
M2018	Axis 18				
M2019	Axis 19				
M2020	Axis 20				
M2021	Axis 21				
M2022	Axis 22				
M2023	Axis 23				
M2024	Axis 24				
M2025	Axis 25				
M2026	Axis 26				
M2027	Axis 27				
M2028	Axis 28				
M2029	Axis 29				
M2030	Axis 30				
M2031	Axis 31				
M2032	Axis 32				
M2033	Unusable (2 points)	—	—	—	—
M2034					
M2035	Motion error history clear request flag		Main cycle	Command signal	M3080
M2036	Unusable (2 points)	—	—	—	—
M2037					
M2038	Motion SFC debugging flag	At debugging mode transition		Status signal	
M2039	Motion error detection flag	Immediate			
M2040	Speed switching point specified flag		At start	Command signal	M3073
M2041	System setting error flag	Operation cycle		Status signal	
M2042	All axes servo ON command		Operation cycle	Command signal	M3074
M2043	Real mode/virtual mode switching request (SV22)		At virtual mode transition		M3075
M2044	Real mode/virtual mode switching status (SV22)	At virtual mode transition		Status signal	
M2045	Real mode/virtual mode switching error detection signal (SV22)				
M2046	Out-of-sync warning (SV22)				
M2047	Motion slot fault detection flag	Operation cycle			
M2048	JOG operation simultaneous start command		Main cycle	Command signal	M3076
M2049	All axes servo ON accept flag	Operation cycle		Status signal	
M2050	Unusable	—	—	—	—
M2051	Manual pulse generator 1 enable flag		Main cycle	Command signal	M3077
M2052	Manual pulse generator 2 enable flag				M3078
M2053	Manual pulse generator 3 enable flag				M3079
M2054	Operation cycle over flag	Operation cycle		Status signal	

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2055	Unusable (6 points)	—	—	—	—
M2056					
M2057					
M2058					
M2059					
M2060					
M2061	Axis 1	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2062	Axis 2				
M2063	Axis 3				
M2064	Axis 4				
M2065	Axis 5				
M2066	Axis 6				
M2067	Axis 7				
M2068	Axis 8				
M2069	Axis 9				
M2070	Axis 10				
M2071	Axis 11				
M2072	Axis 12				
M2073	Axis 13				
M2074	Axis 14				
M2075	Axis 15				
M2076	Axis 16				
M2077	Axis 17				
M2078	Axis 18				
M2079	Axis 19				
M2080	Axis 20				
M2081	Axis 21				
M2082	Axis 22				
M2083	Axis 23				
M2084	Axis 24				
M2085	Axis 25				
M2086	Axis 26				
M2087	Axis 27				
M2088	Axis 28				
M2089	Axis 29				
M2090	Axis 30				
M2091	Axis 31				
M2092	Axis 32				
M2093	Unusable (8 points)	—	—	—	—
M2094					
M2095					
M2096					
M2097					
M2098					
M2099					
M2100					
M2101	Axis 1	Operation cycle		Status signal (Note-2), (Note-4)	
M2102	Axis 2				
M2103	Axis 3				
M2104	Axis 4				
M2105	Axis 5				
M2106	Axis 6				
M2107	Axis 7				
M2108	Axis 8				
M2109	Axis 9				

Start accept flag

Speed change accepting flag

Synchronous encoder current value changing flag (Note-5)

Common device list (Continued)

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2110	Axis 10	Synchronous encoder current value changing flag (Note-5)	Operation cycle		Status signal (Note-2), (Note-4)	
M2111	Axis 11					
M2112	Axis 12					
M2113	Unusable (15 points)		—	—	—	—
M2114						
M2115						
M2116						
M2117						
M2118						
M2119						
M2120						
M2121						
M2122						
M2123						
M2124						
M2125						
M2126						
M2127						
M2128	Axis 1	Automatic decelerating flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2129	Axis 2					
M2130	Axis 3					
M2131	Axis 4					
M2132	Axis 5					
M2133	Axis 6					
M2134	Axis 7					
M2135	Axis 8					
M2136	Axis 9					
M2137	Axis 10					
M2138	Axis 11					
M2139	Axis 12					
M2140	Axis 13					
M2141	Axis 14					
M2142	Axis 15					
M2143	Axis 16					
M2144	Axis 17					
M2145	Axis 18					
M2146	Axis 19					
M2147	Axis 20					
M2148	Axis 21					
M2149	Axis 22					
M2150	Axis 23					
M2151	Axis 24					
M2152	Axis 25					
M2153	Axis 26					
M2154	Axis 27					
M2155	Axis 28					
M2156	Axis 29					
M2157	Axis 30					
M2158	Axis 31					
M2159	Axis 32					
M2160	Unusable (19 points) (Note-7)		—	—	—	—
M2161						
M2162						
M2163						
M2164						
M2165						
M2166						
M2167						
M2168						
M2169						
M2170						
M2171						
M2172						
M2173						
M2174						
M2175						
M2176						
M2177						
M2178						

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2179	Unusable (45 points) (Note-7)		—	—	—	—
M2180						
M2181						
M2182						
M2183						
M2184						
M2185						
M2186						
M2187						
M2188						
M2189						
M2190						
M2191						
M2192						
M2193						
M2194						
M2195						
M2196						
M2197						
M2198						
M2199						
M2200						
M2201						
M2202						
M2203						
M2204						
M2205						
M2206						
M2207						
M2208						
M2209						
M2210						
M2211						
M2212						
M2213						
M2214						
M2215						
M2216						
M2217						
M2218						
M2219						
M2220						
M2221						
M2222						
M2223						
M2224	Unusable (16 points)		—	—	—	—
M2225						
M2226						
M2227						
M2228						
M2229						
M2230						
M2231						
M2232						
M2233						
M2234						
M2235						
M2236						
M2237						
M2238						
M2239						
M2240	Axis 1	Speed change "0" accepting flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2241	Axis 2					
M2242	Axis 3					
M2243	Axis 4					
M2244	Axis 5					
M2245	Axis 6					
M2246	Axis 7					
M2247	Axis 8					

Common device list (Continued)

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2248	Axis 9	Speed change "0" accepting flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2249	Axis 10					
M2250	Axis 11					
M2251	Axis 12					
M2252	Axis 13					
M2253	Axis 14					
M2254	Axis 15					
M2255	Axis 16					
M2256	Axis 17					
M2257	Axis 18					
M2258	Axis 19					
M2259	Axis 20					
M2260	Axis 21					
M2261	Axis 22					
M2262	Axis 23					
M2263	Axis 24					
M2264	Axis 25					
M2265	Axis 26					
M2266	Axis 27					
M2267	Axis 28					
M2268	Axis 29					
M2269	Axis 30					
M2270	Axis 31					
M2271	Axis 32					
M2272	Axis 1	Control loop monitor status				
M2273	Axis 2					
M2274	Axis 3					
M2275	Axis 4					
M2276	Axis 5					
M2277	Axis 6					
M2278	Axis 7					
M2279	Axis 8					
M2280	Axis 9					
M2281	Axis 10					
M2282	Axis 11					
M2283	Axis 12					

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2284	Axis 13	Control loop monitor status	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2285	Axis 14					
M2286	Axis 15					
M2287	Axis 16					
M2288	Axis 17					
M2289	Axis 18					
M2290	Axis 19					
M2291	Axis 20					
M2292	Axis 21					
M2293	Axis 22					
M2294	Axis 23					
M2295	Axis 24					
M2296	Axis 25					
M2297	Axis 26					
M2298	Axis 27					
M2299	Axis 28					
M2300	Axis 29					
M2301	Axis 30					
M2302	Axis 31					
M2303	Axis 32					
M2304	Unusable (16 points)		—	—	—	—
M2305						
M2306						
M2307						
M2308						
M2309						
M2310						
M2311						
M2312						
M2313						
M2314						
M2315						
M2316						
M2317						
M2318						
M2319						

(Note-1): The range of axis No.1 to 16 is valid in the Q172DSCPU.
(Note-2): The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(Note-3): Device area of 17 axes or more is unusable in the Q172DSCPU.
(Note-4): Device area of 9 axes or more is unusable in the Q172DCPU(-S1).
(Note-5): It is unusable in the real mode.
(It can be used in the real mode for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".)
(Note-6): It can also be ordered the device of a remark column.
(Note-7): These devices can be used as the clutch statuses.
The clutch status can also be set as the optional device at the clutch parameter.
Refer to Section 7.2.2.

(9) Common device list (Command signal)

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-1), (Note-2)
M3072	PLC ready flag		Main cycle		M2000
M3073	Speed switching point specified flag		At start		M2040
M3074	All axes servo ON command		Operation cycle		M2042
M3075	Real mode/virtual mode switching request (SV22)		At virtual mode transition		M2043
M3076	JOG operation simultaneous start command		Main cycle	Command signal	M2048
M3077	Manual pulse generator 1 enable flag				M2051
M3078	Manual pulse generator 2 enable flag				M2052
M3079	Manual pulse generator 3 enable flag				M2053
M3080	Motion error history clear request flag				M2035
M3081 to M3135	Unusable (Note-3) (55 points)	—	—	—	—

(Note-1): The state of a device is not in agreement when the device of a remark column is turned ON/OFF directly. In addition, when the request from a data register and the request from the above device are performed simultaneously, the request from the above device becomes effective.

(Note-2): It can also be ordered the device of a remark column.

(Note-3): Do not use it as a user device. It can be used as a device that performs automatic refresh because of area for the reserve of command signal.

POINT

The device of a remark column turns ON by OFF to ON of the above device, and turns OFF by ON to OFF of the above device.
The command signal cannot be turned ON/OFF by the PLC CPU in the automatic refresh because the statuses and commands are mixed together in M2000 to M2053. Use the above devices in the case.
And, it can also be turned ON/OFF by the data register. (Refer to Section 4.2.8)

4.1.1 Axis statuses

(1) In-position signal (M2402+20n) ..... Status signal

(a) This signal turns on when the number of droop pulses in the deviation counter becomes below the "in-position range" set in the servo parameters. It turns off at positioning start.

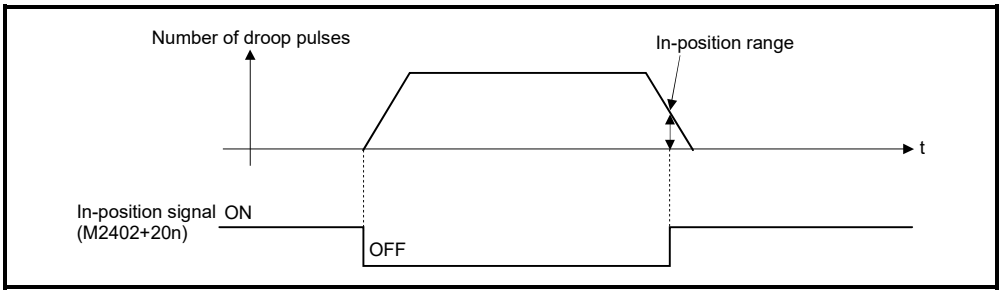

(b) While the control circuit power supply of the servo amplifier is ON, the status of the in-position signal of the servo amplifier (Servo status1 (#8010+20n): b12 QDS) is reflected.
However, the state of the signal is always OFF for the following.
- Servo error
- From positioning start until deceleration start (Note-1)
- Current value change
- Home position return (Note-2)
- Speed-torque control QDS

(Note-1): Except during position follow-up control, high-speed oscillation control, manual pulse generator operation, and synchronous control. (The in-position signal is constantly updated during such controls.)

(Note-2): The in-position signal may be updated after a proximity dog is turned ON during home position return.

(2) Zero pass signal (M2406+20n) ..... Status signal

This signal turns on when the zero point is passed after the control circuit power supply on of the servo amplifier.
Once the zero point has been passed, it remains on state until the Multiple CPU system has been reset.
However, in the home position return method of proximity dog method, count method, dog cradle method, limit switch combined method, scale home position signal detection method, or dogless home position signal reference method, this signal turns off once at the home position return in real mode start and turns on again at the next zero point passage.

(3) Error detection signal (M2407+20n) ..... Status signal

(a) This signal turns on with detection of a minor error or major error, and it is used as judgement of the error available/not available.
The applicable error code (Note-1) is stored in the minor error code storage register (D6+20n) with detection of a minor error.
The applicable error code (Note-1) is stored in the major error code storage register (D7+20n) with detection of a major error.

(b) This signal turns off when the error reset command (M3207+20n) turns on.

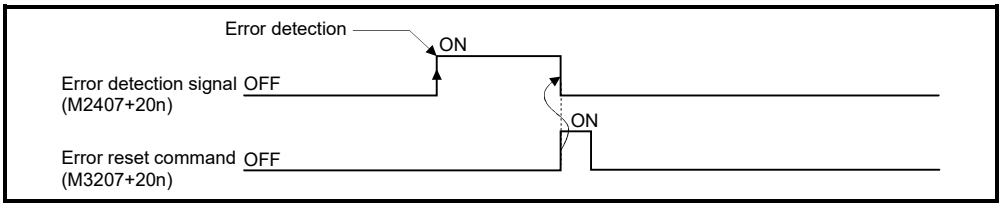

REMARK

(Note-1) : Refer to APPENDIX 1 for the error codes with detection of major/minor errors.

(4) Servo error detection signal (M2408+20n) ..... Status signal

(a) This signal turns on when an error occurs at the servo amplifier side (except for errors cause of alarms and emergency stops) (Note-1) and it is used as judgement of the servo error available/not available.
When an error is detected at the servo amplifier side, the applicable error code (Note-1) is stored in the servo error code storage register (D8+20n).

(b) This signal turns off when the servo error reset command (M3208+20n) turns on or the servo power supply turns on again.
(Servo error reset is valid in the real mode only.)

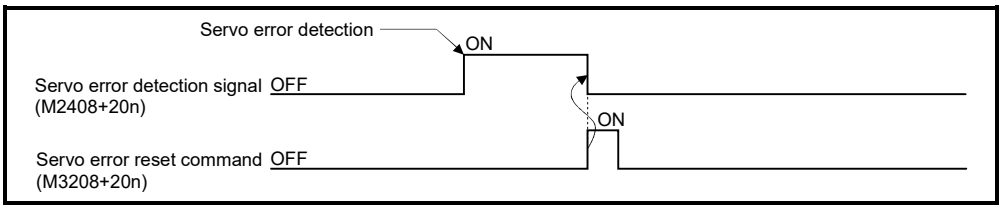

REMARK

(Note-1) : Refer to APPENDIX 1.5 for the error codes on errors detected at the servo amplifier side.

(5) Home position return request signal (M2409+20n)

..... Status signal

This signal turns on when it is necessary to confirm the home position address.

(a) When not using an absolute position system

1) This signal turns on in the following cases:
   • Multiple CPU system power supply on or reset
   • Servo amplifier power supply on
   • Home position return start in the real mode
   (Unless a home position return is completed normally, the home position return request signal does not turn off.)
2) This signal turns off by the completion of home position return.

(b) When using an absolute position system

1) This signal turns on in the following cases:
   • When not executing a home position return once after system start.
   • Home position return start in the real mode
   (Unless a home position return is completed normally, the home position return request signal does not turn off.)
   • Erase of an absolute data in Motion CPU according to causes, such as battery error
   • Servo error [2025] (absolute position erase) occurrence
   • Servo error [2143] (absolute position counter warning) occurrence
   • Servo error [2913] (encoder counter error) occurrence
   • Major error [1201], [1202], [1203] or [1204] occurrence
   • When the "rotation direction selection" of servo parameter is changed.
2) This signal turns off by the completion of the home position return.

⚠CAUTION

● When using the absolute position system function, on starting up, and when the Motion controller or absolute value motor has been replaced, always perform a home position return in real mode. In the case of the absolute position system, use the sequence program to check the home position return request before performing the positioning control.
Failure to observe this could lead to an accident such as a collision.

(6) Home position return complete signal (M2410+20n)

..... Status signal

(a) This signal turns on when the home position return operation using the servo program has been completed normally.

(b) This signal turns off at the positioning start, JOG operation start and manual pulse generator operation start.

(c) If the home position return of proximity dog, dog cradle or stopper method using the servo program is executed during this signal on, a minor error (error code: 115) occurs and it cannot be start the home position return.

(7) FLS signal (M2411+20n) (Note-1) ..... Status signal

(a) This signal is controlled by the ON/OFF state for the upper stroke limit switch input (FLS) of the Q172DLX/servo amplifier and bit device QDS.
- Upper stroke limit switch input OFF ..... FLS signal: ON
- Upper stroke limit switch input ON ..... FLS signal: OFF

(b) The state for the upper stroke limit switch input (FLS) when the FLS signal is ON/OFF is shown below.

1) Q172DLX use (Note-2)

2) Servo amplifier input use (Note-3)

3) Bit device use (Note-1) QDS
The set bit device is the FLS signal.

(Note-1): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for an external signal and bit device.
(Note-2): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for a pin configuration.
(Note-3): Refer to the "Servo Amplifier Instruction Manual" for a pin configuration.

(c) "Normally open contact input" and "Normally closed contact input" of the servo data setting can be selected. QDS

(8) RLS signal (M2412+20n) (Note-1) ..... Status signal

(a) This signal is controlled by the ON/OFF state for the lower stroke limit switch input (RLS) of the Q172DLX/servo amplifier and bit device QDS.
- Lower stroke limit switch input OFF ..... RLS signal: ON
- Lower stroke limit switch input ON ..... RLS signal: OFF

(b) The state of the lower stroke limit switch input (RLS) when the RLS signal is ON/OFF is shown below.

1) Q172DLX use (Note-2)

2) Servo amplifier input use (Note-3)

3) Bit device use (Note-1) QDS
The set bit device is the RLS signal.

(Note-1): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for an external signal and bit device.
(Note-2): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for a pin configuration.
(Note-3): Refer to the "Servo Amplifier Instruction Manual" for a pin configuration.

(c) "Normally open contact input" and "Normally closed contact input" of the servo data setting can be selected. QDS

(9) STOP signal (M2413+20n) (Note-1) ..... Status signal

(a) This signal is controlled by the ON/OFF state for the stop signal input (STOP) of the Q172DLX and bit device QDS.
- Stop signal input of the Q172DLX OFF ..... STOP signal: OFF
- Stop signal input of the Q172DLX ON ..... STOP signal: ON

(b) The state of the stop signal input (STOP) when the STOP signal input is ON/OFF is shown below.
1) Q172DLX use (Note-2)

2) Bit device use (Note-1) QDS
The set bit device is the STOP signal.

(Note-1): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for an external signal and bit device.
(Note-2): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for a pin configuration.

(c) "Normally open contact input" and "Normally closed contact input" of the servo data setting can be selected. QDS

(10) DOG/CHANGE signal (M2414+20n) (Note-1) ..... Status signal

(a) This signal turns on/off by the proximity dog input (DOG) of the Q172DLX/ servo amplifier/input (DI) of built-in interface in Motion CPU QDS/bit device QDS at the home position return in the real mode.
This signal turns on/off by the speed/position switching input (CHANGE) of the Q172DLX/proximity dog input (DOG) of servo amplifier/input (DI) of built-in interface in Motion CPU QDS/bit device QDS at the speed-position switching control in the real mode. (Note-2)
(There is no CHANGE signal in the servo amplifier.)

(b) The state of the speed/position switching input (CHANGE) when the CHANGE signal is ON/OFF is shown below.

1) Q172DLX use (Note-3)

2) Servo amplifier input use (Note-4)

3) Built-in interface in Motion CPU use (Note-3) QDS

4) Bit device use (Note-1) QDS
The set bit device is the DOG/CHANGE signal.

(Note-1): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for an external signal and bit device.
(Note-2): When using the Q173DCPU(-S1)/Q172DCPU(-S1), the external input signal (DOG) of servo amplifier can also be used in the speed-position switching control. (Refer to Section 1.4 for the software version that supports this function.)
(Note-3): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for a pin configuration.
(Note-4): Refer to the "Servo Amplifier Instruction Manual" for a pin configuration.

(c) When using the Q172DLX/built-in interface in Motion CPU, "Normally open contact input" and "Normally closed contact input" of the system setting can be selected.
When using the proximity dog input (DOG) of servo amplifier/bit device, "Normally open contact input" and "Normally closed contact input" of the servo data setting can be selected. QDS

(11) Servo ready signal (M2415+20n) ..... Status signal

(a) This signal turns on when the servo amplifiers connected to each axis are in the READY state (READY ON and Servo ON).

(b) This signal turns off in the following cases.
- All axes servo ON command (M2042) is off
- Servo amplifier is not mounted
- Servo parameter is not set
- It is received the forced stop input from an external source
- Servo OFF by the servo OFF command (M3215+20n) ON of each axis
- Servo error occurs

Refer to "APPENDIX 1.5 Servo errors" for details.

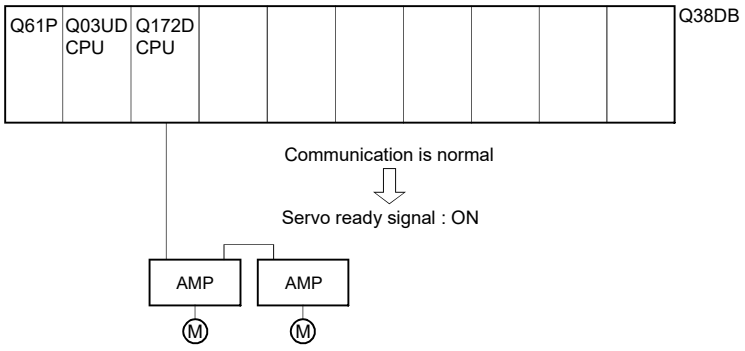

POINT

When the part of multiple servo amplifiers connected to the SSCNETⅢ(/H) becomes a servo error, only an applicable axis becomes the servo OFF state.

(12) Torque limiting signal (M2416+20n) ..... Status signal

This signal turns on while torque limit is executed.
The signal toward the torque limiting axis turns on.

(13) Virtual mode continuation operation disable warning signal (M2418+20n) ..... Status signal

When the difference between the final servo command value in previous virtual mode last time and the servo current value at virtual mode switching next time exceeds the "Allowable travel value during power off (× Number of feedback pulses)" set in the "System setting", "Virtual mode continuation operation disable warning signal device" of the applicable axis is turned on as warning of being noncontinuable in virtual mode operation.

It checks for the following cases.

No.	Check	Remark
1	Servo amplifier power supply ON for absolute axis.	• A minor error (error code: 901 (power supply on in real mode)/9010 (power supply on in virtual mode)) are also set.
2	Anytime during real mode operation.	• It also turns on at the following cases. 1) Home position return 2) Current value change 3) Fixed-pitch feed, speed control (Ⅰ), (Ⅱ) or speed-position switching control.

Reset the "Virtual mode continuation operation disable warning signal device" using the Motion SFC program.

4.1.2 Axis command signals

(1) Gain changing 2 command (M3206+20n) QDS Ver.!

..... Command signal

This signal is used to change the gain of servo amplifier (MR-J5(W)-□B) in the Motion controller by the gain changing 2 command ON/OFF.

• ON ..... Gain changing 2 command ON

• OFF ..... Gain changing 2 command OFF

When gain changing command (M3216+20n) and gain changing 2 command (M3206+20n) are both ON, the setting details of gain changing 2 command (M3206+20n) are prioritized.

Refer to the "Servo amplifier Instruction Manual" for details of gain changing function.

(2) Error reset command (M3207+20n) ..... Command signal

This command is used to clear the minor error code storage register (D6+20n), and major error code storage register (D7+20n) of an axis for which the error detection signal has turn on (M2407+20n: ON), and reset the error detection signal (M2407+20n).

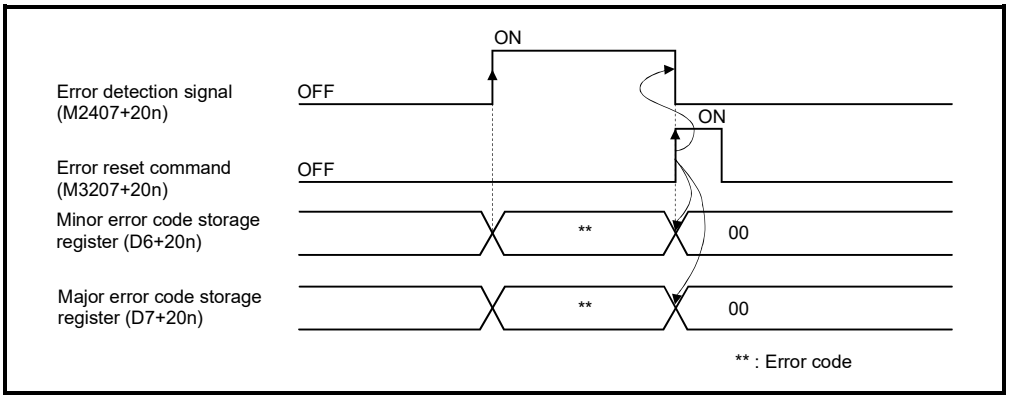

(3) Servo error reset command (M3208+20n) ..... Command signal

This command is used to clear the servo error code storage register (D8+20) of an axis for which the servo error detection signal has turn on (M2408+20n: ON), and reset the servo error detection signal (M2408+20n).

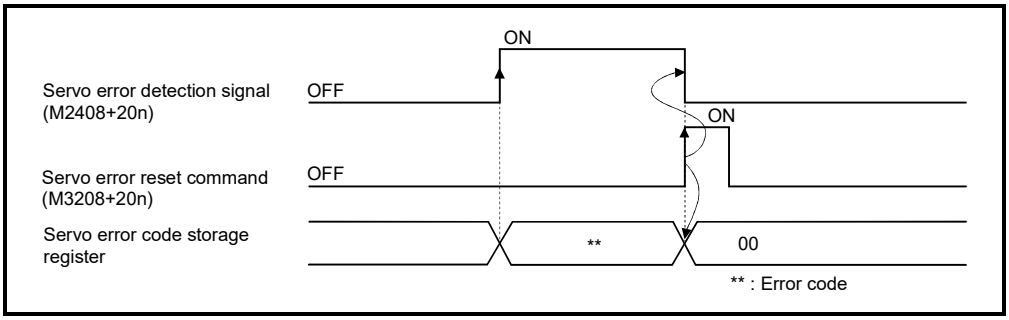

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(4) Address clutch reference setting command (M3213+20n)

..... Command signal

This signal is only effective when the output module is a cam connected an address mode clutch or a rotary table, and it is used to specify the "0" reference position for the current value within 1 virtual axis revolution.
The following processes are executed based on the ON/OFF state of the address clutch reference setting command at the real mode/virtual mode switching request.

(a) M3213+20n : ON

Virtual mode operation starts as "0" for the current value within 1 virtual axis revolution of the main shaft and auxiliary input axis.

(b) M3213+20n : OFF

- If the drive module is a virtual servo motor or an incremental synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis in the previous virtual mode.
- If the drive module is an absolute synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis calculated from the current value of synchronous encoder.

(5) Cam reference position setting command (M3214+20n)

..... Command signal

This signal is only effective when the output module is a cam, and it is used to specify the cam reference position.
The following processes are executed based on the ON/OFF state of the cam reference position setting command at the real mode/virtual mode switching request.

(a) M3214+20n : ON

- The current value is cam reference position.
- The current feed current value is lower stroke limit value (bottom dead point). Moreover, a cam table search is conducted from the beginning of a cycle, and the bottom dead point (0) is specified as the current value within 1 cam shaft revolution.

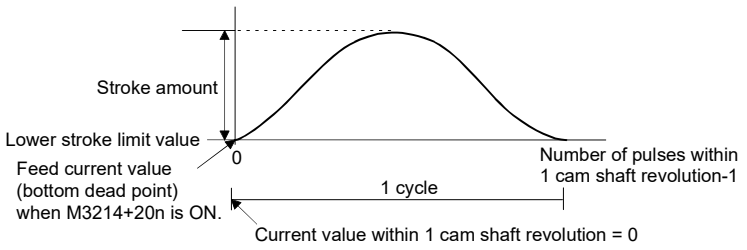

- After the bottom dead point alignment of cam is completed at the system start-up, it must be turned on at the first real mode to virtual mode switching.
  Once the bottom dead point setting is set, operation will be continued with M3214+20n ON by switching from real mode to virtual mode.
  (The bottom dead point position is stored in the backup memory.)

(b) M3214+20n : OFF

(Final servo command value in previous virtual mode operation)
− (Current servo current value) ≤ (In-position) ……1)

• For formula 1)
Operation will be continued by making the lower stroke limit value and current value within 1 cam shaft revolution into the lower stroke limit value and current value within 1 cam shaft revolution at the previous virtual mode operation.

(Final servo command value in previous virtual mode operation)
− (Current servo current value) > (In-position) ……2)

• For formula 2)
Current value within 1 cam shaft revolution for current feed current value is calculated and operation will be continued by making the lower stroke limit value into the lower stroke limit value at the previous virtual mode operation.

[Calculation of current value within 1 cam shaft revolution]

(Feed current value) = (Stroke amount) × (Stroke ratio) + (Lower stroke limit value)

The stroke ratio(y) used as above formula is calculated, the cam table of the setting cam No. is searched from the beginning of a cycle, and the current value within 1 cam shaft revolution for applicable point is calculated. Because the current value within 1 cam shaft revolution is searched always from the beginning of a cycle, beware of cases where the same stroke ratio appears more than once in the cycle.
(Make the necessary position adjustment at the real mode/virtual mode switching.)

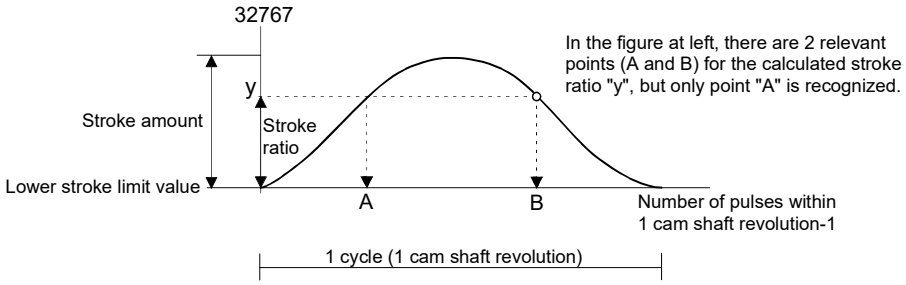

(6) Servo OFF command (M3215+20n) ..... Command signal

This command is used to execute the servo OFF state (free run state) when all axes servo ON command (M2042) is ON.

• OFF ..... Servo ON

• ON ..... Servo OFF (free run state)

Execute this command after positioning completion because it becomes invalid during positioning.

When the servo OFF command is executed in virtual mode, the clutch will be disengaged first. If it is executed while a "clutch ON" state, a minor error occurs and the servo OFF command becomes invalid.

⚠CAUTION

● Turn the power supply of the servo amplifier side off before touching a servo motor, such as machine adjustment.

(7) Gain changing command (M3216+20n) ..... Command signal

This signal is used to change the gain of servo amplifier in the Motion controller by the gain changing command ON/OFF.

• ON ..... Gain changing command ON

• OFF ..... Gain changing command OFF

When gain changing command (M3216+20n) and gain changing 2 command (M3206+20n) are both ON, the setting details of gain changing 2 command (M3206+20n) are prioritized. QDS

Refer to the "Servo amplifier Instruction Manual" for details of gain changing function.

(8) PI-PID switching command (M3217+20n) QDS

..... Command signal

This signal is used to change the PI-PID switching of servo amplifier in the Motion controller by the PI-PID switching command ON/OFF.

• ON ..... PI-PID switching command ON(PID control)

• OFF ..... PI-PID switching command OFF(PI control)

Refer to the "Servo amplifier Instruction Manual" for details of PI-PID switching function.

(9) Control loop changing command (M3218+20n)

..... Command signal

When using the fully closed loop control servo amplifier, this signal is used to change the fully closed loop control/semi closed loop control of servo amplifier in the Motion controller by the control loop changing command ON/OFF.

• ON ..... During fully closed loop control

• OFF ..... During semi closed loop control

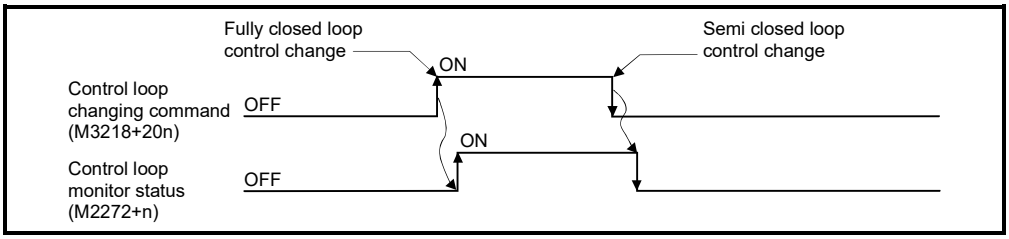

Refer to the "Servo amplifier Instruction Manual" for details of control loop changing function.

POINTS

(1) When the servo amplifier is not started (LED: "AA", "Ab", "AC", "Ad" or "AE"), if the control loop changing command is turned ON/OFF, the command becomes invalid.

(2) When the following are operated during the fully closed loop, it returns to the semi closed loop control.

(a) Power supply OFF or reset of the Multiple CPU system

(b) Wire breakage of the SSCNETⅢ cable between the servo amplifier and Motion controller

(c) Control circuit power supply OFF of the servo amplifier

4.1.3 Virtual servo motor axis statuses

(1) Positioning start complete signal (M4000+20n)

..... Status signal

(a) This signal turns on with the start completion for the positioning control of the axis specified with the servo program. It does not turn on at JOG operation. It can be used to read an M-code (Note-1) at the positioning start.

(b) This signal turns off at leading edge of complete signal OFF command (M4804+20n) or positioning completion.

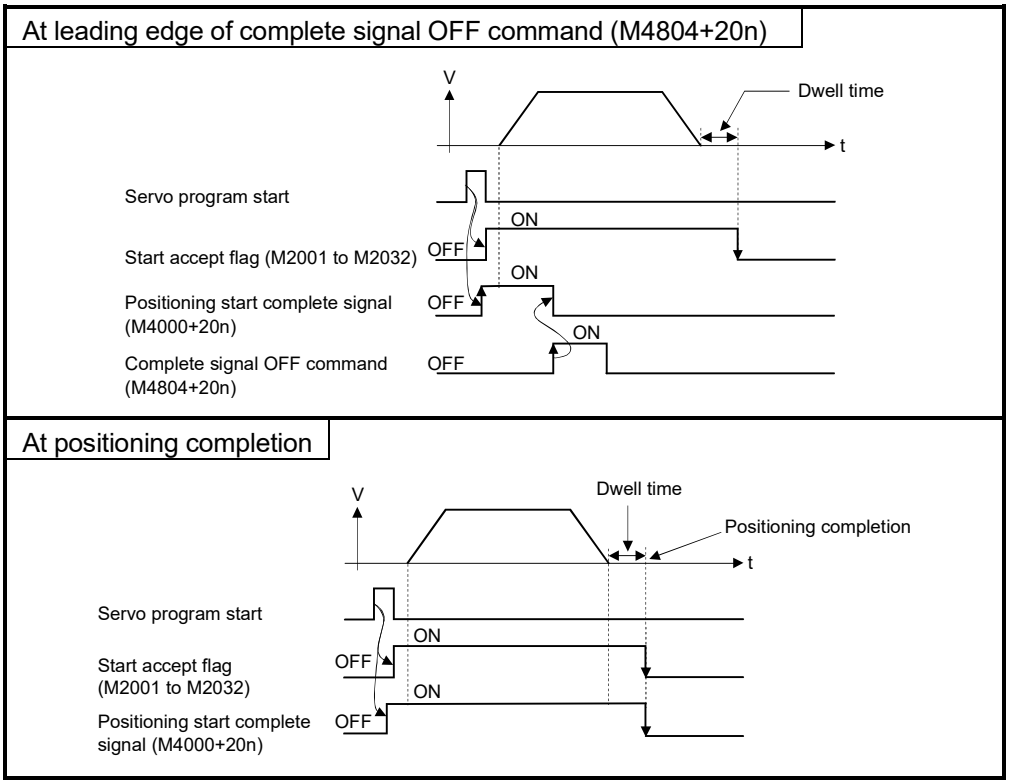

REMARK

(Note-1): Refer to Chapter 7 of the "Q173D(S)CPU/ Q172D(S)CPU Motion controller (SV13/SV22) Programming manual (REAL MODE)".

(2) Positioning complete signal (M4001+20n) ..... Status signal

(a) This signal turns on with the completion for the positioning control of the axis specified with the servo program.
It does not turn on at the start or stop on the way using JOG operation or speed control.
It does not turn on at the stop on the way during positioning.
It can be used to read an M-code at the positioning completion.
(Refer to Chapter 7 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV/13/SV22) Programming Manual (REAL MODE)".)

(b) This signal turns off at leading edge of complete signal OFF command (M4804+20n) or positioning start.

At leading edge of complete signal OFF command (M4804+20n)

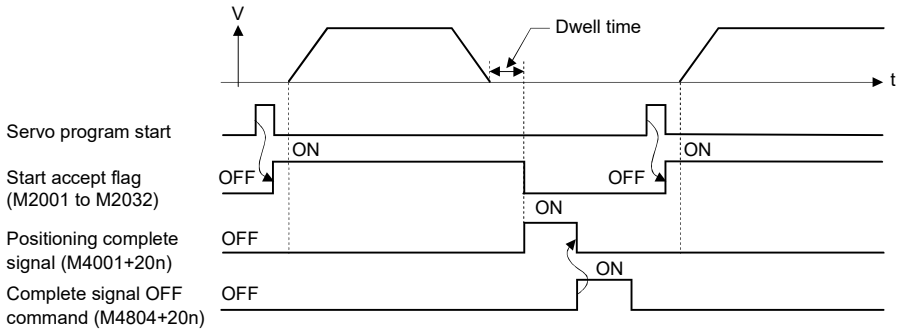

At next positioning start

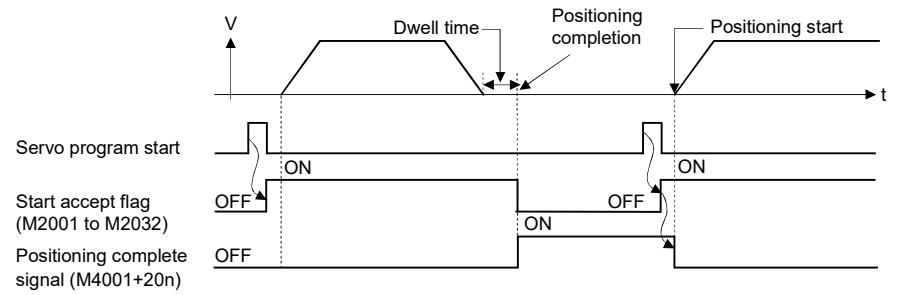

(3) Command in-positioning signal (M4003+20n) ..... Status signal

(a) This signal turns on when the absolute value of the difference between the command position and the feed current value becomes below the "command in-position range" set in the parameters of virtual servo motor (Refer to Section 6.1.2).
This signal turns off in the following cases.
• Positioning control start
• Speed control
• JOG operation
• Speed-torque control QDS

(b) Command in-position check is continually executed during position control.
This check is not executed during speed control.

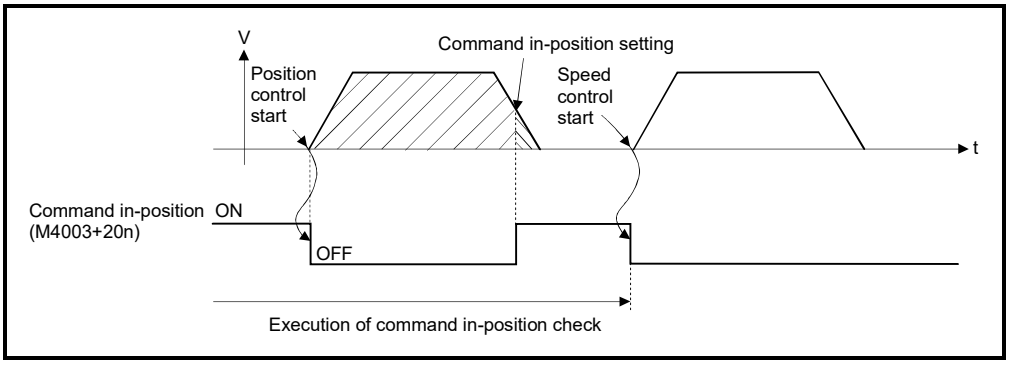

(4) Speed controlling signal (M4004+20n) ..... Status signal

(a) This signal turns on during speed control, and it is used as judgement of during the speed control or position control.
The speed controlling signal that turned on with speed control turns off at the positioning control start of following figure.

(b) This signal turns off at the power supply on and during position control.

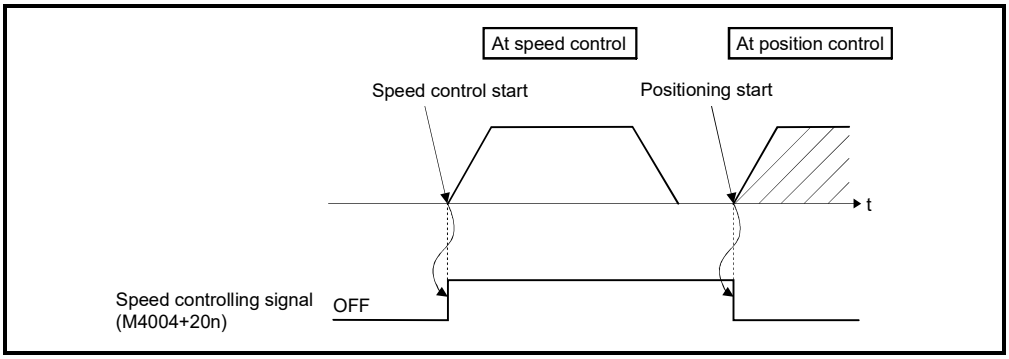

(5) Error detection signal (M4007+20n) ..... Status signal

(a) This signal turns on when a minor error or major error is detected in a virtual servo motor or output module connected to a virtual servo motor.
It is used as judgement of the error available/not available by turning the error detection signal on/off.

(b) When the error detection signal turns on, the applicable error code is stored in the error code storage register.
• Minor error code (Note-1) ... Stored in the minor error code storage register (D802+20n) (Note-2).
• Major error code (Note-1) ... Stored in the major error code storage register (D803+20n) (Note-2).
The judgement of the virtual servo motor/output module for detected error can be confirmed by the error code details or turning the error detection signal of output module on/off.

(c) When the error reset command (M4807+20n) turns on in the state where the virtual servo motor or output module connected to the virtual servo motor turns on is normal, the error detection signal turns off.

REMARK

(Note-1) : Refer to APPENDIX 1.4 for details of the virtual servo motor minor/major error codes.
Refer to APPENDIX 1.6 for details of the output module minor/major error codes.
(Note-2) : Refer to Section 4.2.3 for details of the minor error storage code register (D802+20n) and major error code storage register (D803+20n).

(6) M-code outputting signal (M4019+20n) ..... Status signal

(a) This signal turns during M-code is outputting.

(b) This signal turns off when the stop command, cancel signal, skip signal or FIN signal are inputted.

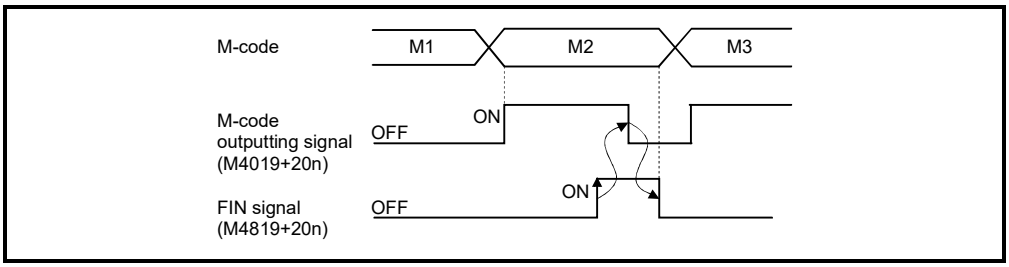

POINT

(1) The FIN signal (M4819+20n) and M-code outputting signal (M4019+20n) are both signal for the FIN signal wait function.
(2) The FIN signal (M4819+20n) and M-code outputting signal (M4019+20n) are effective only when FIN acceleration/deceleration is designated in the servo program. Otherwise, the FIN signal wait function is disabled, and the M-code outputting signal (M4019+20n) does not turn on.

4.1.4 Virtual servo motor axis command signals

(1) Stop command (M4800+20n) ..... Command signal

(a) This command stops a starting axis from an external source and becomes effective at leading edge of signal. (An axis for which the stop command is turning on cannot be started.)

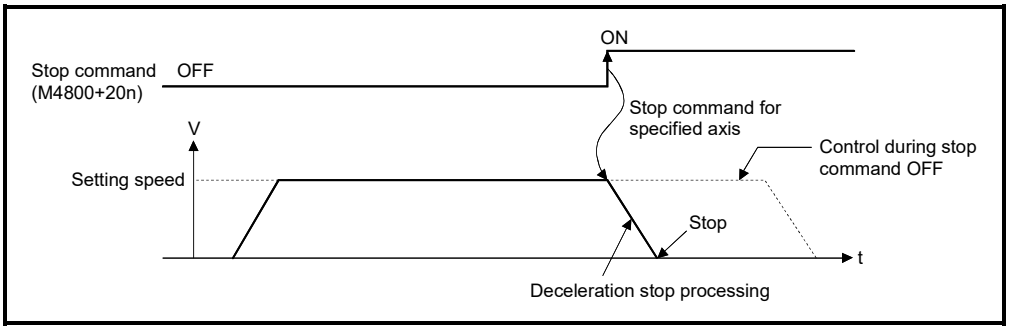

(b) It can also be used as the stop command during the speed control. (Refer to Section "6.13 Speed Control (I)" of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the speed control.

(c) Stop processing details when the stop command turned on is shown in Table 4.1.

Table 4.1 Stop Processing at Stop command ON

Control details during execution	Processing at the turning stop command on	
	During control	During deceleration stop processing
Positioning control	The axis decelerates to a stop in the deceleration time set in the parameter block or servo program.	The stop command is ignored and deceleration stop processing is continued.
Speed control		
JOG operation		

(d) The stop command in a dwell time is invalid. (After a dwell time, the start accept flag (M2001+n) turns OFF, and the positioning complete signal (M4001+20n) turns ON.)

(2) Rapid stop command (M4801+20n) ..... Command signal

(a) This command stops a starting axis rapidly from an external source and becomes effective at leading edge of signal. (An axis for which the rapid stop command is turning on cannot be started.)

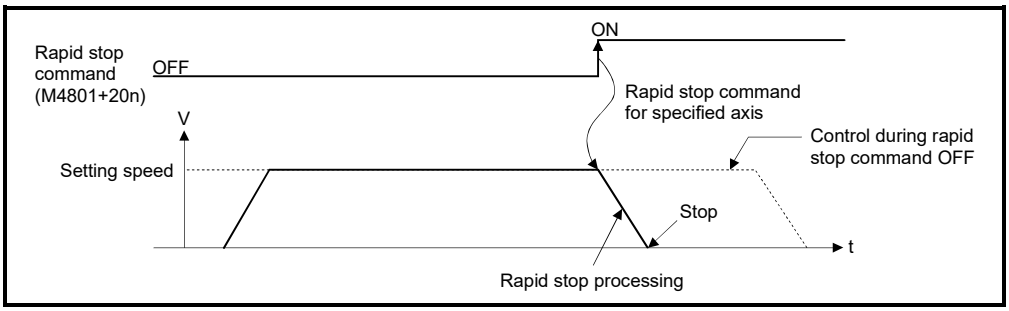

(b) The details of stop processing when the rapid stop command turns on are shown in Table 4.2.

Table 4.2 Details of stop processing when the rapid stop command turns on

Control details during execution	Processing at the turning rapid stop command on	
	During control	During deceleration stop processing
Positioning control Speed control JOG operation	Rapid stop processing is executed. 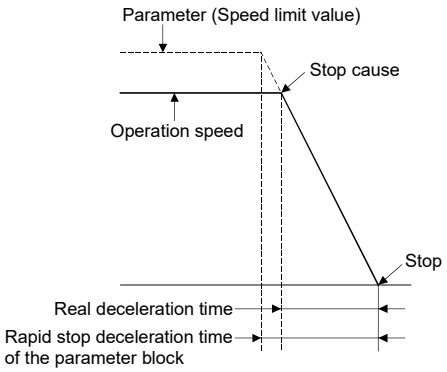	Deceleration processing is stopped and rapid stop processing is executed. 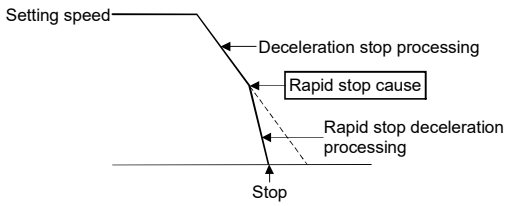

(c) The rapid stop command in a dwell time is invalid. (After a dwell time, the start accept flag (M2001+n) turns OFF, and the positioning complete signal (M4001+20n) turns ON.)

REMARK

(Note-1) : Rapid stop processing is deceleration stop with deceleration time set in the parameter block or servo program.

(3) Forward rotation JOG start command (M4802+20n)/Reverse rotation JOG start command (M4803+20n) ..... Command signal

(a) JOG operation to the address increase direction is executed while forward rotation JOG start command (M4802+20n) is turning on.
When M4802+20n is turned off, a deceleration stop is executed in the deceleration time set in the parameter block.

(b) JOG operation to the address decrease direction is executed while reverse rotation JOG start command (M4803+20n) is turning on.
When M4803+20n is turned off, a deceleration stop is executed in the deceleration time set in the parameter block.

POINT
Take an interlock so that the forward rotation JOG start command (M4802+20n) and reverse rotation JOG start command (M4803+20n) may not turn on simultaneously.

(4) Complete signal OFF command (M4804+20n)
..... Command signal

(a) This command is used to turn off the positioning start complete signal (M4000+20n) and positioning complete signal (M4001+20n).

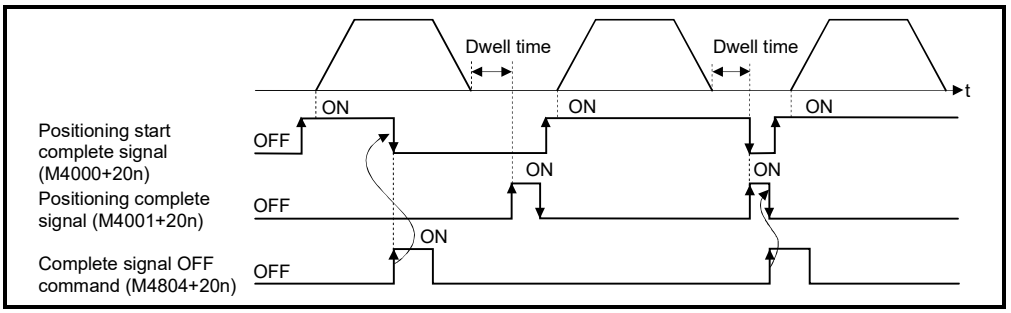

POINT
Do not turn the complete signal OFF command on with a PLS instruction. If it is turned on with a PLS instruction, it cannot be turned off the positioning start complete signal (M4000+20n) and the positioning complete signal (M4001+20n).

(5) Error reset command (M4807+20n) ..... Command signal

(a) This command is used to clear the minor error code storage register (D802+20n) and major error code storage register (D803+20n) of an axis for which the error detection signal has turn on (M4007+20n : ON), and reset the error detection signal (M4007+20n).

(b) The following processing is executed when the error reset command turns on.

- If the virtual servo motor and output module are normal, the minor error code storage register (D802+20n) and major error code storage register (D803+20n) are cleared and the error detection signal (M4007+20n) is reset.
- If the virtual servo motor and output module error has not been canceled, the error code is again stored in the minor error code storage register (D802+20n) and major error code storage register (D803+20n).
  In this case, the error detection signal (M4007+20n) remains on.
  Reset the output module error by error reset of each axis command signal to the output module.

(6) External stop input disable at start command (M4809+20n) ..... Command signal

This command is used to set the external stop signal input valid or invalid.

- ON..... External stop input is set as invalid, and even axes which stop input is turning on can be started.
- OFF .....External stop input is set as valid, and axes which stop input is turning on cannot be started.

POINT
When it stops an axis with the external stop input after it starts by turning on the external stop input disable at start command (M4809+20n), switch the external stop input from OFF → ON (If the external stop input is turning on at the starting, switch it from ON → OFF → ON).

(7) FIN signal (M4819+20n) ..... Command signal

When a M-code is set in a servo program, transit to the next block does not execute until the FIN signal changes as follows: OFF → ON → OFF. Positioning to the next block begins after the FIN signal changes as above.

It is effective, only when the FIN acceleration/deceleration is set and FIN signal wait function is selected.

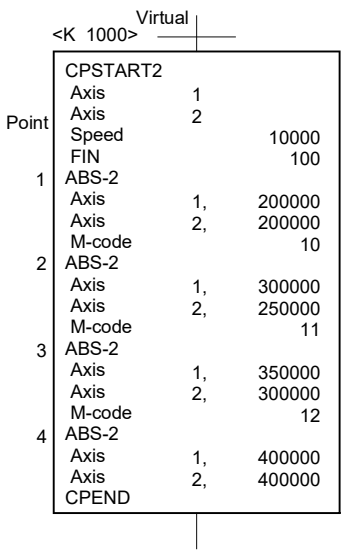

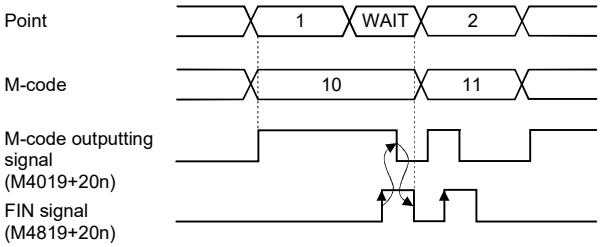

Timing Chart for Operation Description

1. When the positioning of point 1 starts, M-code 10 is output and the M-code outputting signal turns on.
2. FIN signal turns on after performing required processing in the Motion SFC program. Transition to the next point does not execute until the FIN signal turns on.
3. When the FIN signal turns on, the M-code outputting signal turns off.
4. When the FIN signal turns off after the M-code outputting signal turns off, the positioning to the next point 2 starts.

POINT

(1) The FIN signal (M4819+20n) and M-code outputting signal (M4019+20n) are both signal for the FIN signal wait function.

(2) The FIN signal (M4819+20n) and M-code outputting signal (M4019+20n) are valid only when FIN acceleration/deceleration is designated in the servo program. Otherwise, the FIN signal wait function is disabled, and the M-code outputting signal does not turn on.

4.1.5 Synchronous encoder axis statuses

(1) Error detection signal (M4640+4n) ..... Status signal

(a) This signal turns on when a minor error or major error is detected in a synchronous encoder or output module connected to the synchronous encoder.
It is used as judgement of the error available/not available by turning the error detection signal on/off.

(b) When the error detection signal turns on, the applicable error code is stored in the error code storage register.
• Minor error code (Note-1) … Stored in the minor error code storage register (D1122+10n) (Note-2)
• Major error code (Note-1) … Stored in the major error code storage register (D1123+10n) (Note-2)
The judgement of the synchronous encoder/output module for detected error can be confirmed by the error code details or turning the error detection signal of output module on/off.

(c) When the error reset command (M5440+4n) turns on in the state where the synchronous encoder or output module connected to the synchronous encoder is normal, the error detection signal turns off.

(2) External signal TREN (M4641+4n) ..... Status signal

(a) This signal is used for clutch control in the external input mode. It turns on by turning on the Q173DPX "TREN" input terminal, and indicates the input ON/OFF state of the "TREN" terminal.
Q172DEX does not turn ON regardless of the input status of TREN terminal.

(3) Virtual mode continuation operation disabled warning signal (M4642+4n) ..... Status signal

(a) When the inputted current value at the power supply on of the Multiple CPU system differs from the memorized current value (Final current value in virtual mode operation) at the power supply off of the Multiple CPU system, like the absolute synchronous encoder is moved during the power supply off of the Multiple CPU system, this signal turns on.
The validity of continuation operation in virtual mode can be confirmed at the power supply on or resetting of the Multiple CPU system.

REMARK

(Note-1): Refer to APPENDIX 1.4 for details of the minor/major error code for the synchronous encoder.
Refer to APPENDIX 1.6 for details of the minor/major error code for the output module.

(Note-2): Refer to Section 4.2.5 for details of the minor error code storage register (D1122+10n) and major error code storage register (D1123+10n).

4.1.6 Synchronous encoder axis command signals

(1) Error reset command (M5440+4n) ..... Command signal

(a) This command is used to clear the minor error code storage register (D1122+10n) and major error code storage register (D1123+10n) of synchronous encoder of an axis for which the error detection signal has turn on (M4640+4n : ON), and reset the error detection signal (M4640+4n).

(b) The following processing is executed when the error reset command turns on.

- If the synchronous encoder and output module are normal, the minor error code storage register (D1122+10n) and major error code storage register (D1123+10n) are cleared and the error detection signal (M4640+4n) is reset.
- If the synchronous encoder and output module error has not been canceled, the error code is again stored in the minor error code storage register (D1122+10n) and major error code storage register (D1123+10n). In this case, the error detection signal (M4640+4n) remains on. Reset the output module error by error reset of each axis command signal to the output module.

4.1.7 Common devices

POINT

(1) Internal relays for positioning control are not latched even within the latch range.
(2) The range devices allocated as internal relays for positioning control cannot be used by the user even if their applications have not been set.

(1) PLC ready flag (M2000) ..... Command signal

(a) This signal informs the Motion CPU that the PLC CPU is normal.
  1) The positioning control, home position return or JOG operation using the servo program which performs the Motion SFC program when the M2000 is ON.
  2) The above 1) control is not performed even if the M2000 is turned on during the test mode [TEST mode ON flag (SM501) : ON] using MT Developer2.

(b) The setting data such as the fixed parameters, servo parameters and limit switch output data can be changed using MT Developer2 when the M2000 is OFF only.
The above data using MT Developer2 cannot be written when the M2000 is ON.

(c) The following processing are performed when the M2000 turns OFF to ON.
  1) Processing details
    • Clear the M-code storage area of all axes.
    • Turn the PCPU READY complete flag (SM500) on.
    (Motion SFC program can be executed.)
    • Start to execute the Motion SFC program of the automatic starting from the first.
  2) If there is a starting axis, an error occurs, and the processing in above (c) 1) is not executed.
  3) The processing in above (c) 1) is not executed during the test mode.
  It is executed when the test mode is cancelled and M2000 is ON.

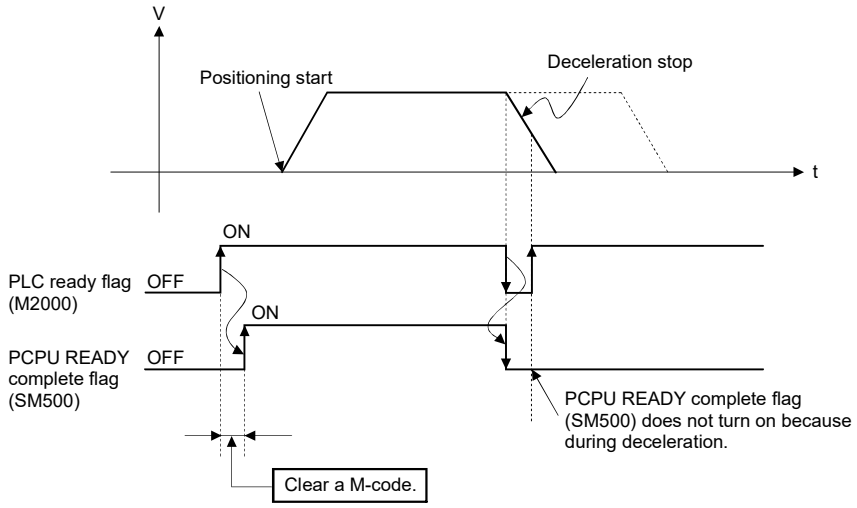

(d) The following processes are performed when the M2000 turns ON to OFF.
1) Processing details
• Turn the PCPU READY complete flag (SM500) off.
• Deceleration stop of the starting axis.
• Stop to execute the Motion SFC program.
• Turn all points of the real output PY off.

(e) Operation at STOP to RUN
Set the condition in which the PLC ready flag (M2000) turns ON. Select the following either.
1) M2000 turns ON by switching from STOP to RUN. (Default)
Condition in which the M2000 turns from OFF to ON.
• Move the RUN/STOP switch from STOP to RUN.
• Turn ON the Multiple CPU system's power supply with the RUN/STOP switch set to RUN.

Condition in which the M2000 turns from ON to OFF
• Move the RUN/STOP switch from RUN to STOP.

2) M2000 turns ON by switching from STOP to RUN and by setting "1" in the setting register.
Condition in which the M2000 turns from OFF to ON
• Set "1" in the setting register (D704) of the PLC ready flag or turn ON the PLC ready flag (M3072) with the RUN/STOP switch set to RUN. (The Motion CPU detects the change from "0" to "1" in the lowest bit of D704).

Condition in which the M2000 turns from ON to OFF
• Set "0" in the setting register (D704) of the PLC ready flag or turn OFF the PLC ready flag (M3072) with the RUN/STOP switch set to RUN. (The Motion CPU detects the change from "1" to "0" in the lowest bit of D704).
• Move the RUN/STOP switch from RUN to STOP.

(2) Virtual servo start accept flag (M2001 to M2032)

..... Status signal

(a) This flag turns on when the servo program is started. The start accept flag corresponding to an axis specified with the servo program turns on.

(b) The ON/OFF processing of the start accept flag is shown below.

1) When the servo program is started using the Motion SFC program or Motion dedicated PLC instruction (D(P).SVST), the start accept flag corresponding to an axis specified with the servo program turns on and it turns off at the positioning completion. This flag also turns off when it is made to stopping on the way.
(When it is made to stop on the way by the speed change to speed "0", this flag remains on.)

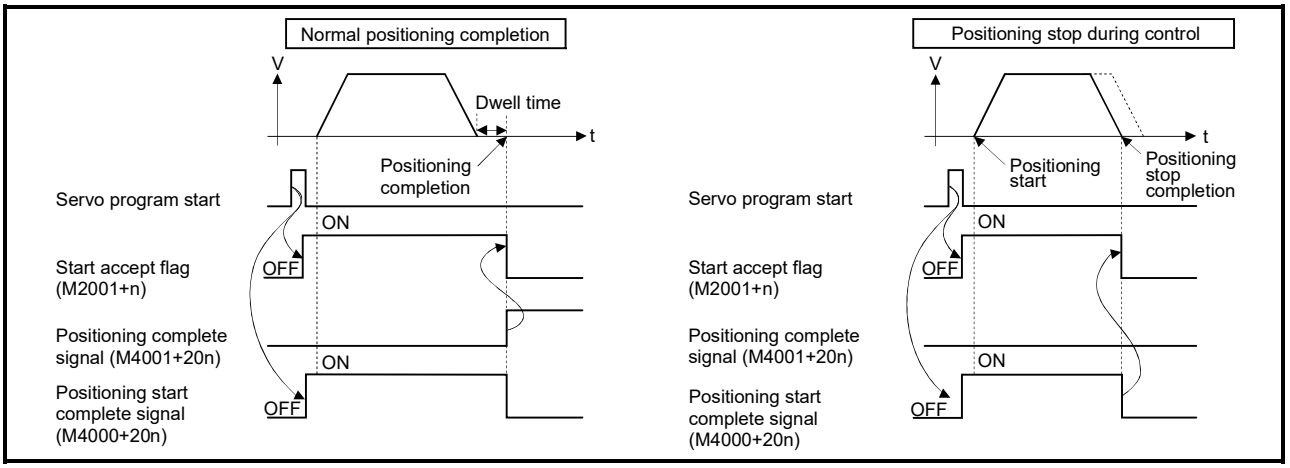

2) This flag turns on at the positioning control by turning on the JOG start command (M4802+20n or M4803+20n), and turns off at the positioning stop by turning off the JOG start command.

3) This flag turns on during the manual pulse generator enable (M2051 to M2053: ON), and turns off at the manual pulse generator disable (M2051 to M2053: OFF).

4) This flag turns on during a current value change by the CHGA instruction of servo program or Motion dedicated PLC instruction (D(P).CHGA), and turns off at the completion of the current value change.

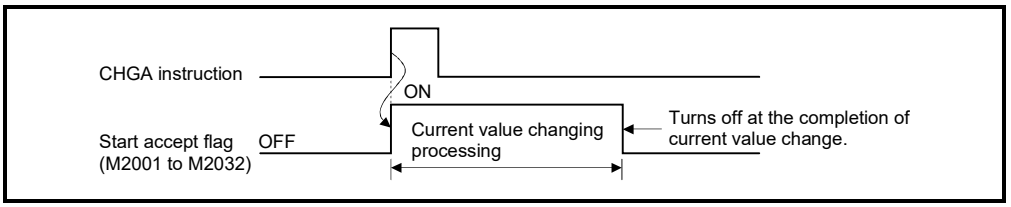

The start accept flag list is shown below.

Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.
1	M2001	9	M2009	17	M2017	25	M2025
2	M2002	10	M2010	18	M2018	26	M2026
3	M2003	11	M2011	19	M2019	27	M2027
4	M2004	12	M2012	20	M2020	28	M2028
5	M2005	13	M2013	21	M2021	29	M2029
6	M2006	14	M2014	22	M2022	30	M2030
7	M2007	15	M2015	23	M2023	31	M2031
8	M2008	16	M2016	24	M2024	32	M2032

(Note): The following range is valid.
• Q172DSCPU : Axis No.1 to 16
• Q172DCPU(-S1) : Axis No.1 to 8

⚠CAUTION

● Do not turn the start accept flags ON/OFF in the user side.

- If the start accept flag is turned off using the Motion SFC program or MT Developer2 while this flag is on, no error will occur but the positioning operation will not be reliable. Depending on the type of machine, it might operate in an unanticipated operation.
- If the start accept flag is turned on using the Motion SFC program or MT Developer2 while this flag is off, no error will occur but the "start accept on error" will occur at the next starting and cannot be started.

(3) Motion error history clear request flag (M2035)

..... Command signal

This flag is used to clear the backed-up Motion error history (#8640 to #8735).
The Motion error history is cleared at leading edge of M2035.
After detection of the leading edge of M2035, the Motion error history is cleared, and then the M2035 is automatically turned OFF.

(4) Motion SFC debugging flag (M2038) ..... Status signal

This flag turns on when it switches to the debug mode of the Motion SFC program using MT Developer2.
It turns off with release of the debug mode.

(5) Motion error detection flag (M2039) ..... Status signal

This flag turns on with error occurrence of the Motion CPU.
Turn off this flag by the user side, after checking the error contents and removing the error cause.
The self-diagnosis error information except stop error is cleared at the turning M2039 ON to OFF.

(6) Speed switching point specified flag (M2040) ..... Command signal

This flag is used when the speed change is specified at the pass point of the constant speed control.

(a) By turning M2040 on before the starting of the constant speed control (before the servo program is started), control with the change speed can be executed from the first of pass point.

• OFF ..... Speed is changed to the specified speed from the pass point of the constant speed control.

• ON ..... Speed has been changed to the specified speed at the pass point of the constant speed control.

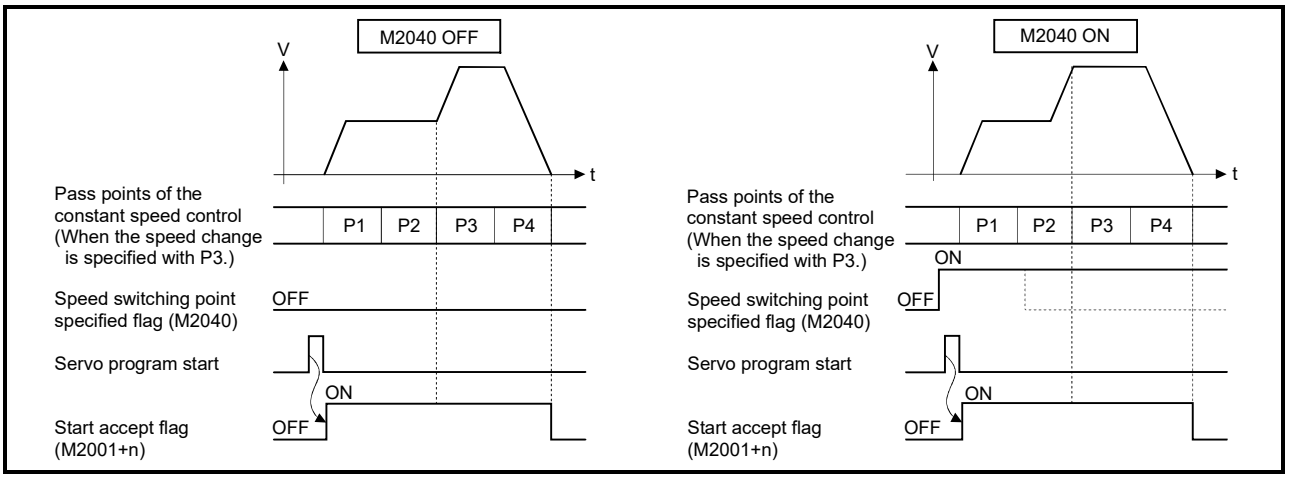

(7) System setting error flag (M2041) ..... Status signal

This flag inputs the "system setting data" set by MT Developer2 and performs an adjustment check with a real mounting state (main base unit/extension base units) at Multiple CPU system's power supply on or reset.

• ON ..... Error

• OFF ..... Normal

(a) When an error occurs, the 7-segment LED at the front side of Motion CPU shows the system setting error.
The error contents can be confirmed using the monitor of MT Developer2.

(b) When M2041 is ON, positioning cannot be started. Remove an error factor, and turn the Multiple CPU system's power supply on again or reset.

REMARK

Even if the module which is not set as the system setting of MT Developer2 is installed in the slot, it is not set as the object of an adjustment check. And the module which is not set as the system setting cannot be used in the Motion CPU.

(8) All axes servo ON command (M2042) ..... Command signal

This command is used to enable servo operation.

(a) Servo operation enabled ..... M2042 turns on while the servo OFF command (M3215+20n) is off and there is no servo error.

(b) Servo operation disable ..... • M2042 is off
• The servo OFF command (M3215+20n) is on
• Servo error state
• Forced stop

Execute this command after positioning completion because it becomes invalid in positioning.

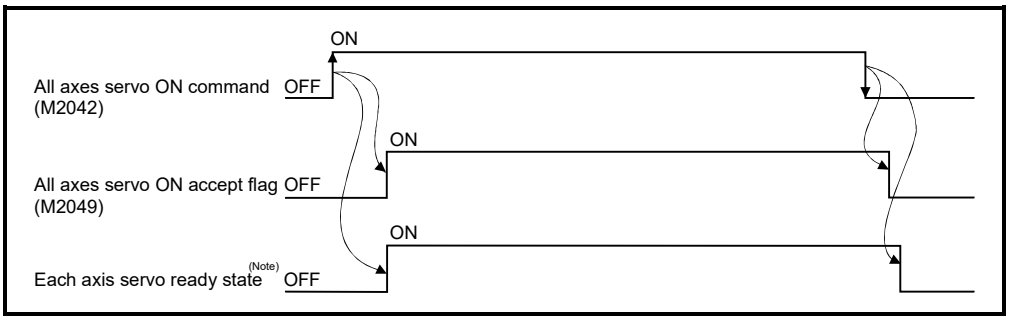

(Note): Refer to servo ready signal (M2415+20n) in Section 4.1.1 for details.

POINT
When M2042 turns ON, it is not turned off even if the Motion CPU is set in the STOP state. M2042 turns OFF by the forced stop of Motion CPU.

(9) Real mode/virtual mode switching request flag (M2043)
..... Command signal

This flag is used for switching between the real mode and virtual modes.

(a) Turn the M2043 on after the PCPU READY complete flag (SM500) has turn on for switching from the real mode to virtual mode.
• An error check is executed when the M2043 is switched from off to on. If no error is detected, switch to the virtual mode, and the real mode/virtual mode status switching status flag (M2044) turns on.
• If an error is detected, not switch to the virtual mode. In this case, the real mode/virtual mode switching error detection flag (M2045) turns on, and the error code is stored in the real mode/virtual mode switching error code storage register (SD504).

(b) Turn the M2043 off for switching from the virtual mode to real mode.
• If all axes of the virtual servo motors stopped, switch to the real mode, and the real mode/virtual mode status switching status flag (M2044) turns off.
• If the virtual servo motor is operating also with 1 axis, not switch to the real mode. In this case, the real mode/virtual mode switching error detection flag (M2045) turns on, and the error code is stored in the real mode/virtual mode switching error code storage register (SD504).

(c) Refer to Chapter 9 for switching between the real mode and virtual modes.

(10) Real mode/virtual mode switching status flag (M2044)

..... Status signal

This flag checks the switching completion between the real mode and virtual modes, and the current mode.

- This flag turns off with during the real mode or switching completion from the virtual mode to real mode.
- This flag turns on with switching completion from the real mode to virtual mode.

It can be used as an interlock for the servo program start or control change (speed change, current value change).

(11) Real mode/virtual mode switching error detection flag (M2045)

..... Status signal

This flag is used as judgement of the error available/not available at the mode switching (between the real mode and virtual modes).

- This flag remains off if no error was detected at mode switching.
- This flag turns on if an error was detected at mode switching.

In this case, the error code is stored in the real mode/virtual mode switching error code storage register (SD504).

(12) Out-of-sync warning flag (M2046) ..... Status signal

(a) This signal turns on mode when a discrepancy of synchronized positions between the drive module and output module occurs during the virtual mode.
It is used as judgement for validity of the continuation operation when the drive module has stopped.
- ON.....Continuation operation disabled
- OFF .....Continuation operation enabled

(b) This out-of-sync warning flag (M2046) turns on the following cases.
- Stop by the forced stop.
- The servo error in the output module.

(c) When the out-of-sync warning flag (M2046) turns on, resume operation by the following procedure.
1) Return to the real mode and eliminate the error cause.
↓
2) Synchronize the axes.
↓
3) Turn the out-of-sync warning flag (M2046) off.
↓
4) Switch to the virtual mode.
↓
5) Resume operation.

(13) Motion slot fault detection flag (M2047) ..... Status signal

This flag is used as judgement of which modules installed in the slot of Motion management are "normal" or "abnormal".

• ON ..... Installed module is abnormal

• OFF ..... Installed module is normal

The module information at the power supply on and after the power supply on are always checked, and errors are detected.

(a) When M2047 turns OFF in operation, the operating axis decelerates to a stop.

(b) When an error occurs, the 7-segment LED at the front side of Motion CPU shows the system setting error.
The error contents can be confirmed using the monitor of MT Developer2.

(c) When M2047 is ON, positioning cannot be started. Remove an error factor, and turn the Multiple CPU system's power supply on again or reset.

(14) JOG operation simultaneous start command (M2048)
..... Command signal

(a) When M2048 turns on, JOG operation simultaneous start based on the JOG operation execution axis set in the JOG operation simultaneous start axis setting register (D710 to D713).

(b) When M2048 turns OFF, the operating axis decelerates to a stop.

(15) All axes servo ON accept flag (M2049) ..... Status signal

This flag turns on when the Motion CPU accepts the all axes servo ON command (M2042).
Since the servo ready state of each axis is not checked, confirm it in the servo ready signal (M2415+20n).

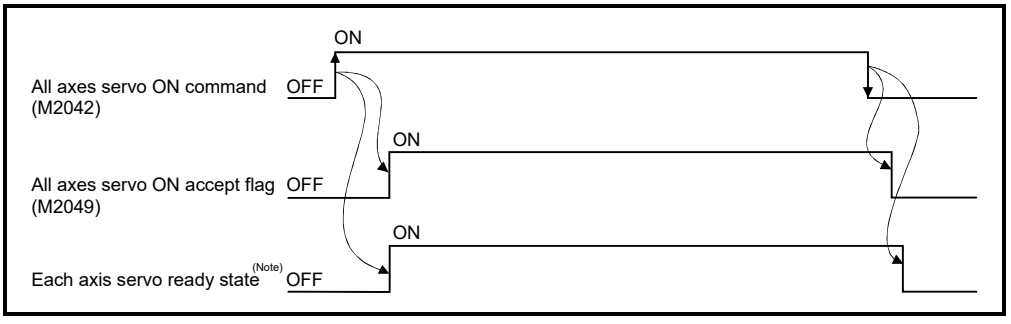

(Note) : Refer to servo ready signal (M2415+20n) in Section 4.1.1 for details.

(16) Manual pulse generator enable flag (M2051 to M2053)
..... Command signal

This flag set the enabled or disabled state for positioning with the pulse input from the manual pulse generators connected to P1 to P3 (Note) of the Q173DPX.

- ON ..... Positioning control is executed by the input from the manual pulse generators.
- OFF ..... Positioning control cannot be executed by the manual pulse generators because of the input from the manual pulse generators is ignored.

Default value is invalid (OFF).

REMARK

(Note) : Refer to the " Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for P1 to P3 connector of the Q173DPX.

(17) Operation cycle over flag (M2054) ..... Status signal

This flag turns on when the time concerning motion operation exceeds the operation cycle of the Motion CPU setting (SD523). Perform the following operation, in making it turn off.

- Turn the power supply of the Multiple CPU system on to off
- Reset the Multiple CPU system
- Reset using the user program

[Operation cycle over measures]

1) Change the operation cycle into a large value in the system setting.
2) The number of instruction completions of an event task or NMI task in the Motion SFC program.

(18) Speed change accepting flag (M2061 to M2092)

..... Status signal

This flag turns on at start of speed change by the control change (CHGV) instruction (or Motion dedicated PLC instruction (D(P).CHGV)) of the Motion SFC program.

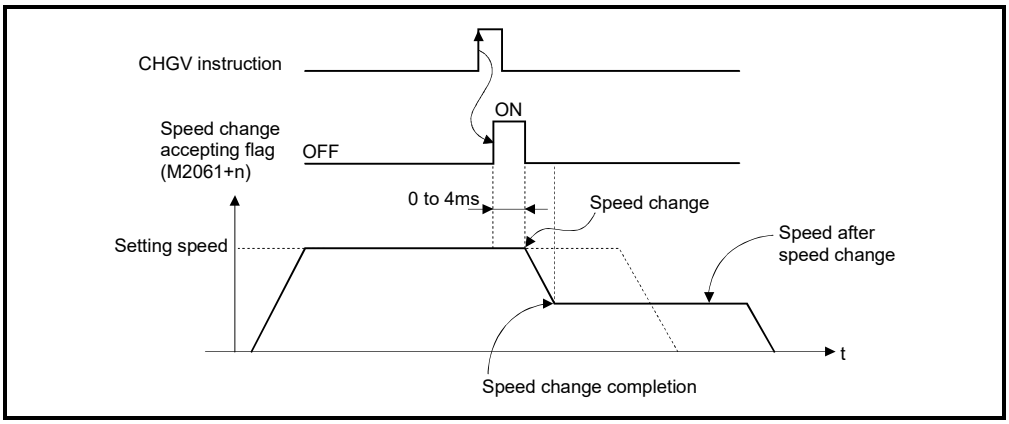

The speed change accepting flag list is shown below.

Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.
1	M2061	9	M2069	17	M2077	25	M2085
2	M2062	10	M2070	18	M2078	26	M2086
3	M2063	11	M2071	19	M2079	27	M2087
4	M2064	12	M2072	20	M2080	28	M2088
5	M2065	13	M2073	21	M2081	29	M2089
6	M2066	14	M2074	22	M2082	30	M2090
7	M2067	15	M2075	23	M2083	31	M2091
8	M2068	16	M2076	24	M2084	32	M2092

(Note): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(19) Automatic decelerating flag (M2128 to M2159) ..... Status signal

This signal turns on while automatic deceleration processing is performed during the positioning control or position follow-up control.

(a) This flag turns on while automatic deceleration to the command address at the position follow-up control, but it turns off if the command address is changed.

(b) This signal turns on while automatic deceleration processing is performed during execution of positioning to final point while in constant speed control.

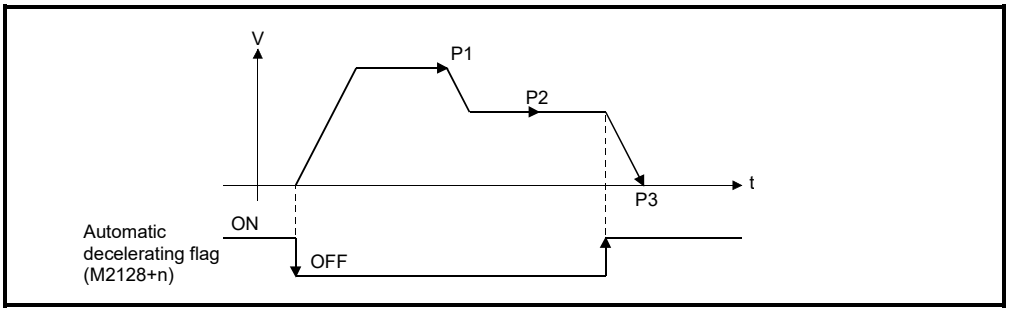

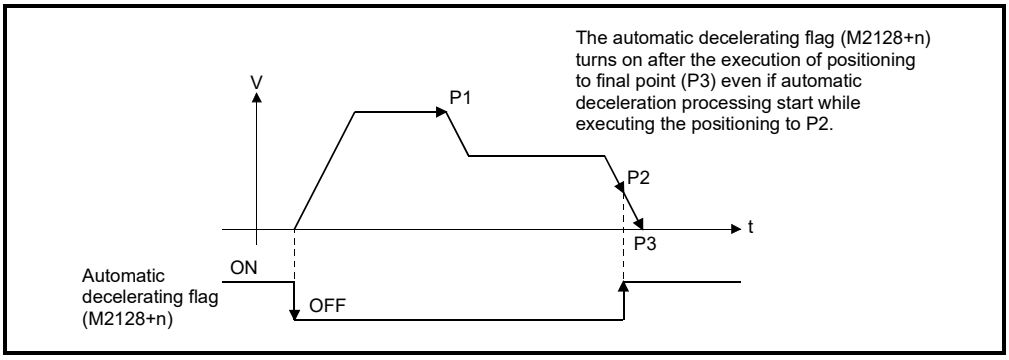

POINT

Set a travel value in which automatic deceleration processing can be started at the final positioning point, therefore the automatic decelerating flag turns on at the start point of automatic deceleration processing after this final point.

(c) The signal turns off when all normal start complete commands became achieve.

(d) The automatic decelerating flag (M2128+n) might be turned ON even during acceleration at advanced S-curve acceleration/deceleration.

(e) In any of the following cases, the automatic decelerating flag (M2128+20n) does not turn off.
- During deceleration due to JOG signal off
- During manual pulse generator operation
- During deceleration due to stop command or stop cause occurrence
- When travel value is 0

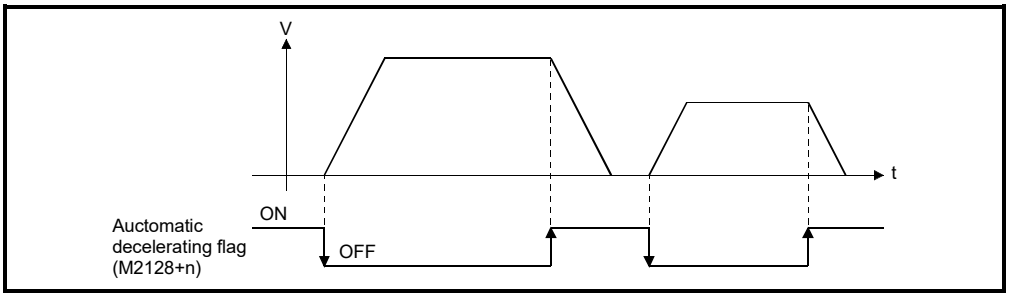

The automatic decelerating flag list is shown below.

Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.
1	M2128	9	M2136	17	M2144	25	M2152
2	M2129	10	M2137	18	M2145	26	M2153
3	M2130	11	M2138	19	M2146	27	M2154
4	M2131	12	M2139	20	M2147	28	M2155
5	M2132	13	M2140	21	M2148	29	M2156
6	M2133	14	M2141	22	M2149	30	M2157
7	M2134	15	M2142	23	M2150	31	M2158
8	M2135	16	M2143	24	M2151	32	M2159

(Note): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(20) Speed change "0" accepting flag (M2240 to M2271)

..... Status signal

This flag turns on while a speed change request to speed "0" or negative speed change request is being accepted.

It turns on when the speed change request to speed "0" or negative speed change request is accepted during a start. After that, this signal turns off when a speed change is accepted or on completion of a stop due to a stop cause.

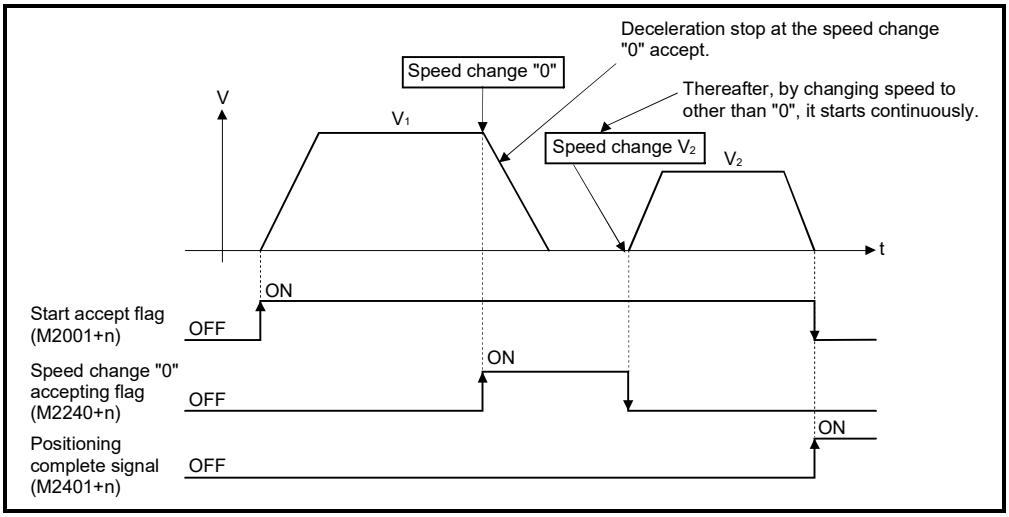

The speed change "0" accepting flag list is shown below.

Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.
1	M2240	9	M2248	17	M2256	25	M2264
2	M2241	10	M2249	18	M2257	26	M2265
3	M2242	11	M2250	19	M2258	27	M2266
4	M2243	12	M2251	20	M2259	28	M2267
5	M2244	13	M2252	21	M2260	29	M2268
6	M2245	14	M2253	22	M2261	30	M2269
7	M2246	15	M2254	23	M2262	31	M2270
8	M2247	16	M2255	24	M2263	32	M2271

(Note): The following range is valid.
• Q172DSCPU : Axis No.1 to 16
• Q172DCPU(-S1) : Axis No.1 to 8

REMARK

(1) Even if it has stopped, when the start accept flag (M2001+n) is ON state, the state where the request of speed change "0" is accepted is indicated. Confirm by this speed change "0" accepting flag (M2240+n).
(2) During interpolation, the flags corresponding to the interpolation axes are set.
(3) In any of the following cases, the speed change "0" request is invalid.
• After deceleration by the JOG signal off
• After positioning automatic deceleration start
• After deceleration due to stop cause

(a) The flag turns off if a speed change request occurs during deceleration to a stop due to speed change "0".

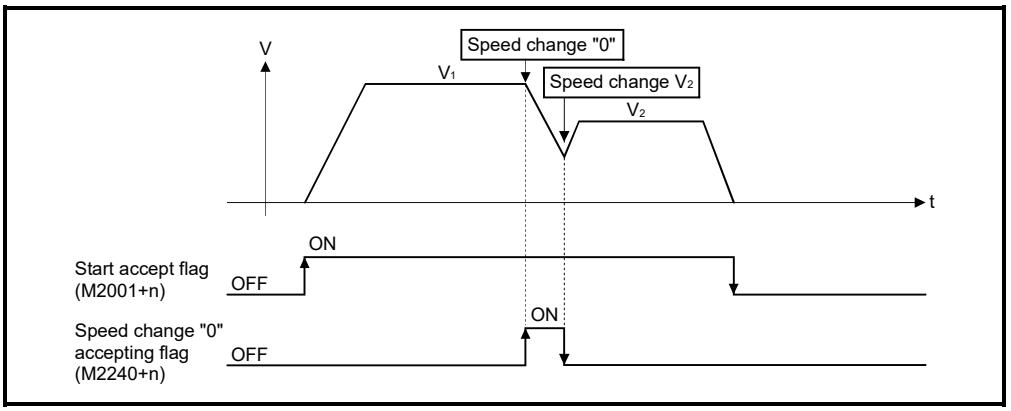

(b) The flag turns off if a stop cause occurs after speed change "0" accept.

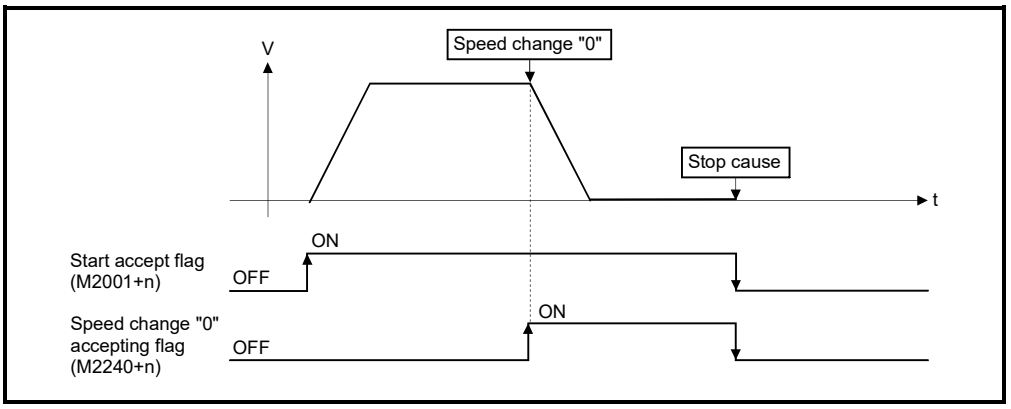

(c) The speed change "0" accepting flag (M2240+n) does not turn on if a speed change "0" occurs after an automatic deceleration start.

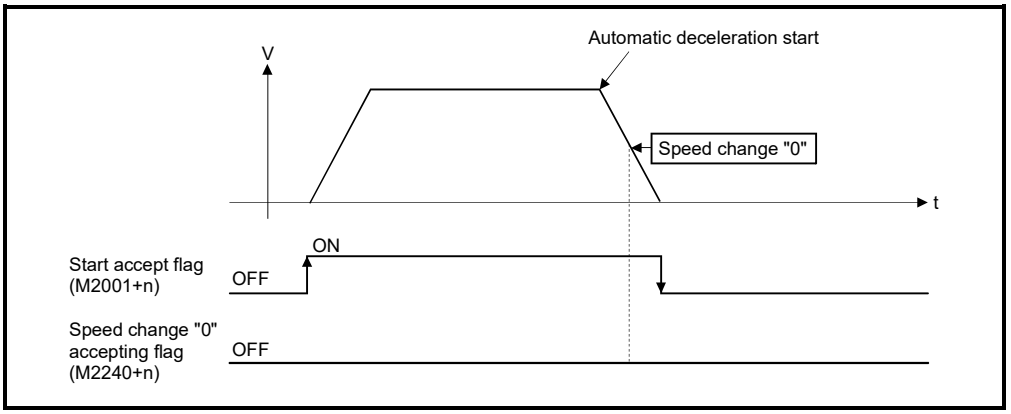

(d) Even if it is speed change "0" after the automatic deceleration start to the "command address", speed change "0" accepting flag (M2240+n) turns on.

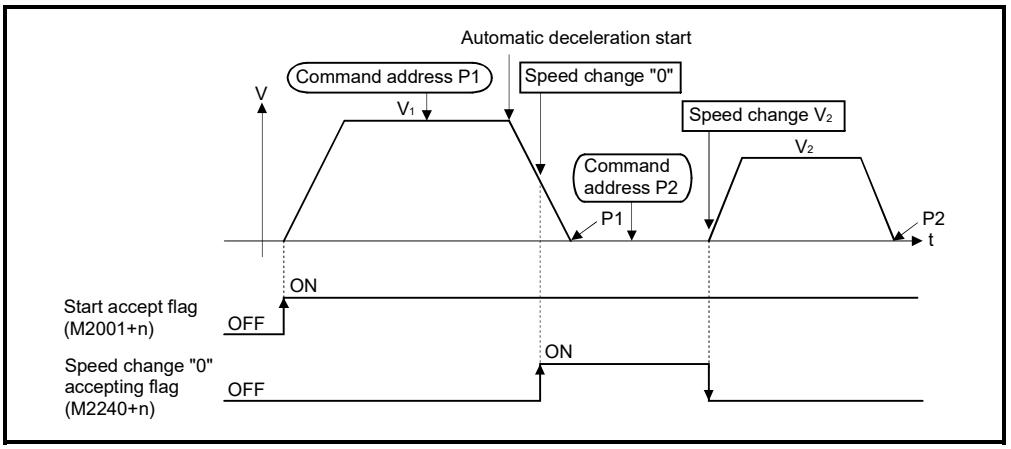

REMARK

It does not start, even if the "command address" is changed during speed change "0" accepting.

(21) Control loop monitor status (M2272 to M2303)

..... Command signal

When using the fully closed loop control servo amplifier, this signal is used to check the fully closed loop control/semi closed loop control of servo amplifier.

• ON ..... During fully closed loop control

• OFF ..... During semi closed loop control

It can be changed the fully closed loop control/semi closed loop control of servo amplifier in the Motion controller by the control loop changing command ON/OFF.

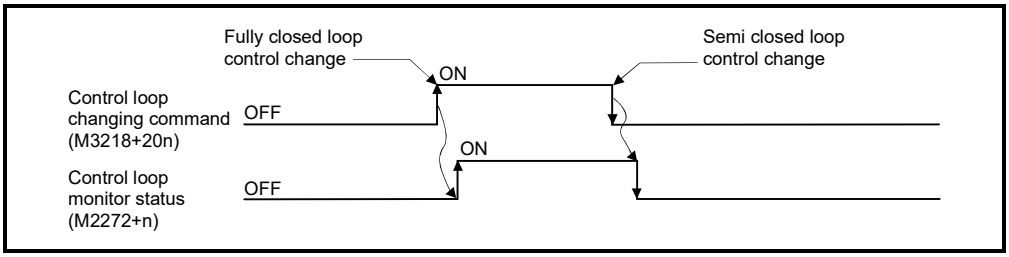

The Control loop monitor status list is shown below.

Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.	Axis No.	Device No.
1	M2272	9	M2280	17	M2288	25	M2296
2	M2273	10	M2281	18	M2289	26	M2297
3	M2274	11	M2282	19	M2290	27	M2298
4	M2275	12	M2283	20	M2291	28	M2299
5	M2276	13	M2284	21	M2292	29	M2300
6	M2277	14	M2285	22	M2293	30	M2301
7	M2278	15	M2286	23	M2294	31	M2302
8	M2279	16	M2287	24	M2295	32	M2303

(Note): The following range is valid.

• Q172DSCPU : Axis No.1 to 16

• Q172DCPU(-S1) : Axis No.1 to 8

4.2 Data Registers

(1) Data register list

SV22				
Device No.	Application	Real	Virtual	
D0 to	Axis monitor device (20 points × 32 axes) Real mode : Each axis Virtual mode : Output module	○	○	Real/virtual community
D640 to	Control change register (2 points × 32 axes)	○	○	
D704 to	Common device (Command signal) (54 points)	○	○	
D758 to	Unusable (42 points)	—	—	
D800	Virtual servo motor axis monitor device (6 points × 32 axes) (Note-1)	Backup	○	Virtual
	Current value after virtual servo motor axis main shaft's differential gear (4 points × 32 axes) (Note-1)			
D1120	Synchronous encoder axis monitor device (6 points × 12 axes)	Backup (Note-2)		
to	Current value after synchronous encoder axis main shaft's differential gear (4 points × 12 axes)	Backup		
D1240 to	Cam axis monitor device (10 points × 32 axes) (Note-1)			
D1560 to D8191	User device (6632 points)			

○ : Valid

□ It can be used as a user device.

POINT

(1) Total number of points for the user devices
6632 points

(2) (Note-1) : This device occupies only the areas of the axes set in the mechanical system program. The unused axis areas in the mechanical system program can be used as a user side.

(3) (Note-2) : It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

(4) This manual describes only details for data registers used in the virtual mode. If it is required, refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)".

(2) Axis monitor device list

Axis No.	Device No.	Signal name
1	D0 to D19	
2	D20 to D39	
3	D40 to D59	
4	D60 to D79	
5	D80 to D99	
6	D100 to D119	
7	D120 to D139	
8	D140 to D159	
9	D160 to D179	
10	D180 to D199	
11	D200 to D219	
12	D220 to D239	
13	D240 to D259	
14	D260 to D279	
15	D280 to D299	
16	D300 to D319	
17	D320 to D339	
18	D340 to D359	
19	D360 to D379	
20	D380 to D399	
21	D400 to D419	
22	D420 to D439	
23	D440 to D459	
24	D460 to D479	
25	D480 to D499	
26	D500 to D519	
27	D520 to D539	
28	D540 to D559	
29	D560 to D579	
30	D580 to D599	
31	D600 to D619	
32	D620 to D639	

	Signal name	Real	Virtual					Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam	Real mode axis			
0	Feed current value/roller cycle speed	○	○				○	Operation cycle		Monitor device
1										
2	Real current value									
3										
4	Deviation counter value									
5										
6	Minor error code							Immediately		
7	Major error code									
8	Servo error code							Main cycle		
9	Home position return re-travel value		Backup				Backup	Operation cycle		
10	Travel value after proximity dog ON						○			
11										
12	Execute program No.		×					At start		
13	M-code							Operation cycle		
14	Torque limit value		○							
15	Data set pointer for constant-speed control		×					At start/ during start		
16	Unusable (Note-1)	—	—				—	—	—	—
17										
18	Real current value at stop input	○	Backup				○	Operation cycle		Monitor device
19										

○ : Valid, × : Invalid

(Note-1): It can be used as the travel value change register. The travel value change register can be set to the device optionally in the servo program.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(3) Control change register list

Axis No.	Device No.	Signal name
1	D640, D641	
2	D642, D643	
3	D644, D645	
4	D646, D647	
5	D648, D649	
6	D650, D651	
7	D652, D653	
8	D654, D655	
9	D656, D657	
10	D658, D659	
11	D660, D661	
12	D662, D663	
13	D664, D665	
14	D666, D667	
15	D668, D669	
16	D670, D671	
17	D672, D673	
18	D674, D675	
19	D676, D677	
20	D678, D679	
21	D680, D681	
22	D682, D683	
23	D684, D685	
24	D686, D687	
25	D688, D689	
26	D690, D691	
27	D692, D693	
28	D694, D695	
29	D696, D697	
30	D698, D699	
31	D700, D701	
32	D702, D703	

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0 1	JOG speed setting	○	○		At start	Command device

○ : Valid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(4) Virtual servo motor axis monitor device list

Axis No.	Device No.	Signal name
1	D800 to D809	
2	D810 to D819	
3	D820 to D829	
4	D830 to D839	
5	D840 to D849	
6	D850 to D859	
7	D860 to D869	
8	D870 to D879	
9	D880 to D889	
10	D890 to D899	
11	D900 to D909	
12	D910 to D919	
13	D920 to D929	
14	D930 to D939	
15	D940 to D949	
16	D950 to D959	
17	D960 to D969	
18	D970 to D979	
19	D980 to D989	
20	D990 to D999	
21	D1000 to D1009	
22	D1010 to D1019	
23	D1020 to D1029	
24	D1030 to D1039	
25	D1040 to D1049	
26	D1050 to D1059	
27	D1060 to D1069	
28	D1070 to D1079	
29	D1080 to D1089	
30	D1090 to D1099	
31	D1100 to D1109	
32	D1100 to D1119	

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Feed current value	Backup	○				×	Operation cycle		Monitor device
1										
2	Minor error code							Immediately		
3	Major error code									
4	Execute program No.							At start		
5	M-code							Operation cycle		
6	Current value after virtual servo motor axis main shaft's differential gear									
7										
8	Error search output axis No.									
9	Data set pointer for constant-speed control									

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(5) Synchronous encoder axis monitor device list

Axis No.	Device No.
1	D1120 to D1129
2	D1130 to D1139
3	D1140 to D1149
4	D1150 to D1159
5	D1160 to D1169
6	D1170 to D1179
7	D1180 to D1189
8	D1190 to D1199
9	D1200 to D1209
10	D1210 to D1219
11	D1220 to D1229
12	D1230 to D1239

Signal name

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Current value	Backup (Note-1)	○	Operation cycle		Monitor device
1						
2	Minor error code	Backup		Immediately		
3	Major error code					
4	Unusable	—	—	—	—	—
5						
6	Current value after synchronous encoder axis main shaft's differential gear	Backup	○	Operation cycle		Monitor device
7						
8	Error search output axis No.					
9	Unusable	—	—	—	—	—

○ : Valid

(Note-1): It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

POINT

(1) It is unusable in the SV22 real mode.
(2) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(3) The device area of 9 axes or more can be used as a user device.
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(6) Cam axis monitor device list

Axis No.	Device No.	Signal name
1	D1240 to D1249	
2	D1250 to D1259	
3	D1260 to D1269	
4	D1270 to D1279	
5	D1280 to D1289	
6	D1290 to D1299	
7	D1300 to D1309	
8	D1310 to D1319	
9	D1320 to D1329	
10	D1330 to D1339	
11	D1340 to D1349	
12	D1350 to D1359	
13	D1360 to D1369	
14	D1370 to D1379	
15	D1380 to D1389	
16	D1390 to D1399	
17	D1400 to D1409	
18	D1410 to D1419	
19	D1420 to D1429	
20	D1430 to D1439	
21	D1440 to D1449	
22	D1450 to D1459	
23	D1460 to D1469	
24	D1470 to D1479	
25	D1480 to D1489	
26	D1490 to D1499	
27	D1500 to D1509	
28	D1510 to D1519	
29	D1520 to D1529	
30	D1530 to D1539	
31	D1540 to D1549	
32	D1550 to D1559	

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Unusable	—	—	—	—	—
1	Execute cam No.	Backup	○	Operation cycle		Monitor device
2	Execute stroke amount					
3						
4	Current value within 1 cam shaft revolution					
5						
6	Unusable	—	—	—	—	—
7						
8						
9						

○ : Valid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(7) Common device list

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction
D704	PLC ready flag request			Main cycle	Command device
D705	Speed switching point specified flag request				
D706	All axes servo ON command request				
D707	Real mode/virtual mode switching request (SV22)				
D708	JOG operation simultaneous start command request				
D709	Unusable		—	—	—
D710	JOG operation simultaneous start axis setting register			At start	Command device
D711					
D712					
D713					
D714	Manual pulse generator axis 1 No. setting register			At the manual pulse generator enable flag OFF to ON	
D715					
D716	Manual pulse generator axis 2 No. setting register				
D717					
D718	Manual pulse generator axis 3 No. setting register				
D719					
D720	Axis 1	Manual pulse generators 1 pulse input magnification setting register (Note-1), (Note-2)			
D721	Axis 2				
D722	Axis 3				
D723	Axis 4				
D724	Axis 5				
D725	Axis 6				
D726	Axis 7				
D727	Axis 8				
D728	Axis 9				
D729	Axis 10				
D730	Axis 11				
D731	Axis 12				
D732	Axis 13				
D733	Axis 14				
D734	Axis 15				
D735	Axis 16				
D736	Axis 17				
D737	Axis 18				
D738	Axis 19				
D739	Axis 20				
D740	Axis 21				
D741	Axis 22				
D742	Axis 23				
D743	Axis 24				
D744	Axis 25				
D745	Axis 26				
D746	Axis 27				
D747	Axis 28				
D748	Axis 29				
D749	Axis 30				
D750	Axis 31				
D751	Axis 32				

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
D752	Manual pulse generator 1 smoothing magnification setting register		At the manual pulse generator enable flag OFF to ON	Command device
D753	Manual pulse generator 2 smoothing magnification setting register			
D754	Manual pulse generator 3 smoothing magnification setting register			
D755	Manual pulse generator 1 enable flag request		Main cycle	
D756	Manual pulse generator 2 enable flag request			
D757	Manual pulse generator 3 enable flag request			
D758	Unusable (42 points)	—	—	—
D759				
D760				
D761				
D762				
D763				
D764				
D765				
D766				
D767				
D768				
D769				
D770				
D771				
D772				
D773				
D774				
D775				
D776				
D777				
D778				
D779				
D780				
D781				
D782				
D783				
D784				
D785				
D786				
D787				
D788				
D789				
D790				
D791				
D792				
D793				
D794				
D795				
D796				
D797				
D798				
D799				

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(Note-2): The following device area is unusable.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

4.2.1 Axis monitor devices

The monitoring data area is used by the Motion CPU to store data such as the feed current value during positioning control, the real current value and the deviation counter value.
It can be used to check the positioning control state using the Motion SFC program.
The user cannot write data to the monitoring data area.
Refer to "APPENDIX 3 Processing Times of the Motion CPU" for the delay time between a positioning device (input, internal relay and special relay) turning on/off and storage of data in the monitor data area.

(1) Feed current value/roller cycle speed storage register (D0+20n, D1+20n) ..... Monitor device

(a) The target address which is output to the servo amplifier is stored in this register. The target address is based on the command address calculated from the mechanical system program settings.

(b) The stroke range check is performed on this feed current value data.

(c) Roller cycle speed is stored.
The storage range for cycle speed the roller cycle speed storage register is shown below.

Setting Units	Storage Range	Real Roller Cycle Speed
mm	1 to 600000000	0.01 to 6000000.00 [mm/min]
inch		0.001 to 600000.000 [inch/min]

(2) Real current value storage register (D2+20n, D3+20n) ..... Monitor device

(a) This device stores the converted value (in an axis control unit) of the feedback position of the motor encoder (in pulse unit).

(b) The "feed current value" is equal to the "real current value" in the stopped state.

(3) Deviation counter value storage register (D4+20n, D5+20n) ..... Monitor device

This register stores the droop pulses read from the servo amplifier.

(4) Minor error code storage register (D6+20n) ..... Monitor device

(a) This register stores the corresponding error code (Refer to APPENDIX 1.4 and 1.6) at the minor error occurrence. If another minor error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Minor error codes can be cleared by an error reset command (M3207+20n).

(5) Major error code storage register (D7+20n) ..... Monitor device

(a) This register stores the corresponding error code (Refer to APPENDIX 1.4 and 1.6) at the major error occurrence. If another major error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Major error codes can be cleared by an error reset command (M3207+20n).

(6) Servo error code storage register (D8+20n) ..... Monitor device

(a) This register stores the corresponding error code (Refer to APPENDIX 1.5) at the servo error occurrence. If another servo error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) It returns to the real mode by the servo error.

(c) For MR-J5(W)-□B, the register stores error codes (2000 or 2100) (Refer to APPENDIX 1.5) at the servo error occurrence. QDS
Error codes read by the servo amplifier are stored in the servo amplifier display servo error code (#8008+20n).

(7) Torque limit value storage register (D14+20n) ..... Monitor device

(a) This register stores the positive direction torque limit value to command the servo amplifier (unit: [%]).
The default value "300[%]" is stored at the power supply of servo amplifier ON.

(b) To monitor the positive/negative direction torque limit value, set "Positive Direction Torque Limit Value Monitor Device" and "Negative Direction Torque Limit Value Monitor Device" with the expansion parameter. QDS
(Refer to "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of expansion parameter.)

4.2.2 Control change registers

This area stores the JOG operation speed data of the virtual servo motor axis.

Table 4.3 Data storage area for control change list

Name	Axis 1	Axis 2	Axis 3	Axis 4	Axis 5	Axis 6	Axis 7	Axis 8
JOG speed setting register	D641, D640	D643, D642	D645, D644	D647, D646	D649, D648	D651, D650	D653, D652	D655, D654
	Axis 9	Axis 10	Axis 11	Axis 12	Axis 13	Axis 14	Axis 15	Axis 16
	D657, D656	D659, D658	D661, D660	D663, D662	D665, D664	D667, D666	D669, D668	D671, D670
	Axis 17	Axis 18	Axis 19	Axis 20	Axis 21	Axis 22	Axis 23	Axis 24
	D673, D672	D675, D674	D677, D676	D679, D678	D681, D680	D683, D682	D685, D684	D687, D686
	Axis 25	Axis 26	Axis 27	Axis 28	Axis 29	Axis 30	Axis 31	Axis 32
	D689, D688	D691, D690	D693, D692	D695, D694	D697, D696	D699, D698	D701, D700	D703, D702

(Note): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(1) JOG speed setting registers (D640+2n, D641+2n)

..... Command device

(a) This register stores the JOG speed at the JOG operation.

(b) Setting range of the JOG speed is shown below.

Item \ Unit	pulse	
	Setting Range	Unit
JOG speed	1 to 2147483647	[pulse/s]

(c) The JOG speed is the value stored in the JOG speed setting registers (D640+2n, D641+2n) at leading edge of the JOG start signal.
Even if data is changed during JOG operation, JOG speed cannot be changed.

(d) Refer to Section 6.21 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the JOG operation.

4.2.3 Virtual servo motor axis monitor devices

(1) Feed current value storage register (D800+10n, D801+10n)

..... Monitor device

(a) This register stores the target address output to the servo amplifier based on the positioning address/travel value specified with the servo program.

(b) The stroke range check is performed on this feed current value data.

(c) Ring address is –2147483648 (-2^{31}) [pulse] to 2147483647 (2^{31}-1) [pulse] in the infinite operation.

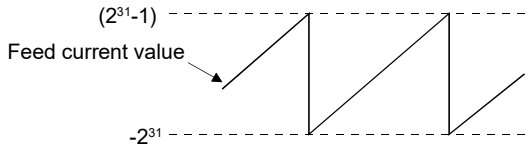

(d) The data of feed current value storage register is also stored in a backup memory at the power supply off or resetting of the Multiple CPU system.

(2) Minor error code storage register (D802+10n)

..... Monitor device

(a) This register stores the corresponding error code (refer to APPENDIX 1.4 and 1.6) at the minor error occurrence in the virtual servo motor or output module. If another minor error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Minor error codes in the virtual servo motor can be cleared by an error reset command (Note-1) of the drive module.
Minor error codes in the output module can be cleared by an error reset command (Note-2) of the output module.

REMARK

(Note-1): Refer to Section 4.1.4 for details of the error reset command for the virtual servo motor axis.
(Note-2): Refer to Section 4.1.2 for details of the error reset command for the output module.

(3) Major error code storage register (D803+10n)

..... Monitor device

(a) This register stores the corresponding error code (refer to APPENDIX 1.4 and 1.6) at the major error occurrence in the virtual servo motor or output module. If another major error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Major error codes in the virtual servo motor can be cleared by an error reset command (Note-1) of the drive module.
Major error codes in the output module can be cleared by an error reset command (Note-2) of the output module.

REMARK

(Note-1): Refer to Section 4.1.4 for details of the error reset command for the virtual servo motor axis.

(Note-2): Refer to Section 4.1.2 for details of the error reset command for the output module.

4.2.4 Current value after virtual servo motor axis main shaft's differential gear

(1) Current value after virtual servo motor axis main shaft's differential gear storage register (D806+10n, D807+10n)

..... Monitor device

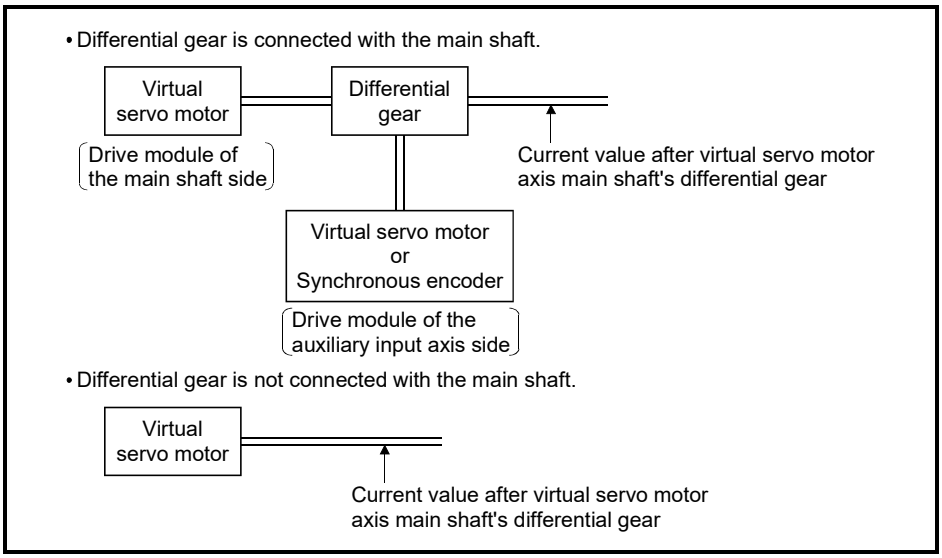

(a) The current value will be the same as the drive module current value of the main shaft side at the virtual mode switching.

(b) When the current value change is executed toward the drive module current value of the main shaft side, the current value after main shaft's differential gear is also simultaneous changed to the specified current value.

(c) If the differential gear is not connected with the main shaft, drive module feed current value of the main shaft side is always stored in the current value storage register after main shaft's differential gear.

(d) In the case of following figure, use "current value after virtual servo motor axis main shaft's differential gear" of axis 1 as "current value after virtual servo motor axis main shaft's differential gear".
(The drive module feed current value of the auxiliary input axis side is stored as "current value after virtual servo motor axis main shaft's differential gear" of axis 2.)

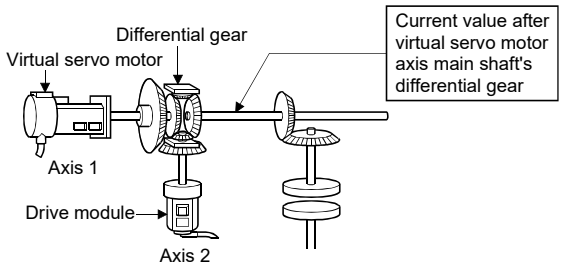

(2) Error search output axis No. storage register (D808+10n)
..... Monitor device

(a) This register stores the axis No. of the output module in error by the error search function in the virtual mode.

(b) If there are no errors at the virtual servo motor axes of the main shaft and auxiliary input axis, the error occurrence output axis No. is stored into the error search output axis No. storage register of the corresponding drive module No. when a minor or major error occurs at the connected output axis.

(c) Error search and error reset

1) Searching the main shaft for error
The output axes connected to the main shaft are searched for an error in order of lower to higher numbers. If either a minor or major error has occurred, the corresponding output axis No. is stored into the error search output axis No. storage register.
Resetting the error of the corresponding output axis stores the other error occurrence output axis No. connected to the same main shaft.

2) Searching the auxiliary input axis for error
If either a minor or major error has occurred at the output axis connected to the auxiliary input axis, the corresponding output axis No. is stored into the error search output axis No. storage register.
However, when the differential gear (for virtual main shaft connection) is used to provide auxiliary input to the main shaft, the output axis connected to the auxiliary input axis is not searched for an error. Use the main shaft side error search output axis No. storage register to confirm the error occurrence output axis No.

(d) When error occurs at the drive module axis
When an error occurs at the main shaft/auxiliary input axis to which the output axis is connected, "0" (no error) is stored into the error search output axis No. storage device if an error occurred at the output axis.

4.2.5 Synchronous encoder axis monitor devices

(1) Current value storage register (D1120+10n, D1121+10n)
..... Monitor device

(a) This register stores the synchronous encoder current value.

(b) Ring address is "-2147483648 (-2^{31}) to 2147483647 (2^{31}-1)" [pulse].

(c) The current value storage register data is also stored in a backup memory at the power supply off or resetting of the Multiple CPU system.

(2) Minor error code storage register (D1122+10n) ..... Monitor device

(a) This register stores the corresponding error code (refer to APPENDIX 1.4 and 1.6) at the minor error occurrence in the synchronous encoder or output module. If another minor error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Minor error codes in the synchronous encoder can be cleared by an error reset command (Note-1) of the synchronous encoder axis.
Minor error codes in the output module can be cleared by an error reset command (Note-2) of the output module.

REMARK

(Note-1): Refer to Section 4.1.6 for details of the error reset command for the synchronous encoder axis.
(Note-2): Refer to Section 4.1.2 for details of the error reset command for the output module.

(3) Major error code storage register (D1123+10n) ..... Monitor device

(a) This register stores the corresponding error code (refer to APPENDIX 1.4 and 1.6) at the major error occurrence in the synchronous encoder or output module. If another major error occurs after error code storing, the previous error code is overwritten by the new error code.

(b) Major error codes in the synchronous encoder axis can be cleared by an error reset command (Note-1) of the synchronous encoder.
Major error codes in the output module can be cleared by an error reset command (Note-2) of the output module.

REMARK

(Note-1): Refer to Section 4.1.6 for details of the error reset command for the synchronous encoder axis.
(Note-2): Refer to Section 4.1.2 for details of the error reset command for the output module.

4.2.6 Current value after synchronous encoder axis main shaft's differential gear

(1) Current value after synchronous encoder axis main shaft's differential gear storage registers (D1126+10n, D1127+10n)

..... Monitor device

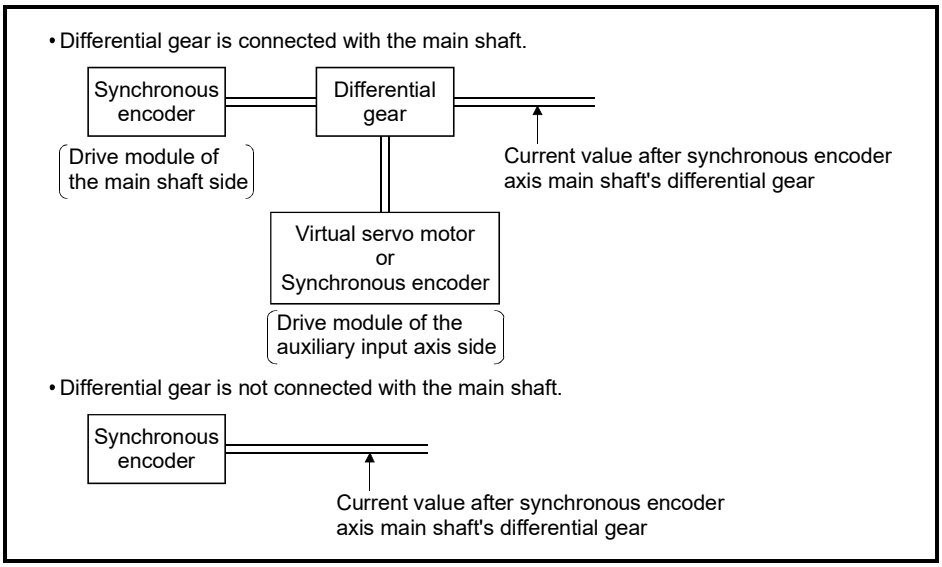

(a) The current value will be the same as the drive module current value of the main shaft side at the virtual mode switching.

(b) When the current value change is executed toward the drive module current value of the main shaft side, the current value after main shaft's differential gear is also simultaneous changed to the specified current value.

(c) If the differential gear is not connected with the main shaft, drive module current value of the main shaft side is always stored in the current value storage register after main shaft's differential gear.

(d) In the case of following figure, use "current value after synchronous encoder axis main shaft's differential gear" of axis 1 as "current value after synchronous encoder axis main shaft's differential gear".
(The drive module feed current value of the auxiliary input axis side is stored as "current value after synchronous encoder axis main shaft's differential gear" of axis 2.)

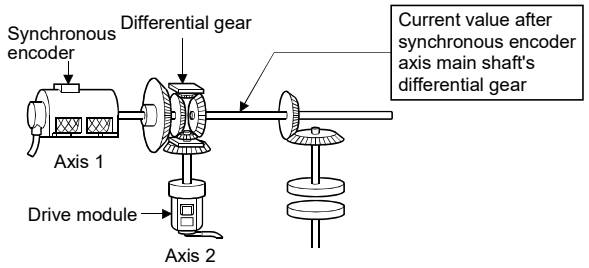

(2) Error search output axis No. storage register (D1128+10n)
..... Monitor device

(a) This register stores the axis No. of the output module in error by the error search function in the virtual mode.

(b) If there are no errors at the synchronous encoder axes of the main shaft and auxiliary input axis, the error occurrence output axis No. is stored into the error search output axis No. storage register of the corresponding drive module No. when a minor or major error occurs at the connected output axis.

(c) Error search and error reset

1) Searching the main shaft for error
The output axes connected to the main shaft are searched for an error in order of lower to higher numbers. If either a minor or major error has occurred, the corresponding output axis No. is stored into the error search output axis No. storage register.
Resetting the error of the corresponding output axis stores the other error occurrence output axis No. connected to the same main shaft.

2) Searching the auxiliary input axis for error
If either a minor or major error has occurred at the output axis connected to the auxiliary input axis, the corresponding output axis No. is stored into the error search output axis No. storage register.
However, when the differential gear (for virtual main shaft connection) is used to provide auxiliary input to the main shaft, the output axis connected to the auxiliary input axis is not searched for an error. Use the main shaft side error search output axis No. storage register to confirm the error occurrence output axis No.

(d) When error occurs at the drive module axis
When an error occurs at the main shaft/auxiliary input axis to which the output axis is connected, "0" (no error) is stored into the error search output axis No. storage device if an error occurred at the output axis.

4.2.7 Cam axis monitor devices

(1) Execute cam No. storage register (D1241+10n) ..... Monitor device

(a) This register stores the cam No. currently being controlled.

(b) Cam No. of the execute cam No. storage register is held until next cam is executed. (Cam No. is not cleared, even if cam control is completed.)

(2) Execute stroke amount storage register (D1242+10n, D1243+10n) ..... Monitor device

(a) This register stores the stroke amount currently being controlled.

(3) Current value within 1 cam shaft revolution storage register (D1244+10n, D1245+10n) ..... Monitor device

(a) This register stores the current value within 1 cam shaft revolution set in the parameter.
The current value is a ring address of "0 to [Number of pulses per cam shaft revolution (Nc)-1]".



4.2.8 Common devices

(1) Common bit device SET/RST request register (D704 to D708, D755 to D757) ..... Command device

Because cannot be turn on/off in every bit from the PLC CPU, the bit device is assigned to data register (D), and each bit device turns on with the lowest rank bit 0 to 1 and each bit device becomes off with 1 to 0.
The details of request register are shown below.
(Refer to Section "4.1.7 Common devices" for the bit device M2000 to M2053.)

Details of the request register

No.	Function	Request register	Bit device	Remark (Note-1)
1	PLC ready flag	D704	M2000	M3072
2	Speed switching point specified flag	D705	M2040	M3073
3	All axes servo ON command	D706	M2042	M3074
4	Real mode/virtual mode switching request (SV22)	D707	M2043	M3075
5	JOG operation simultaneous start command	D708	M2048	M3076
6	Manual pulse generator 1 enable flag	D755	M2051	M3077
7	Manual pulse generator 2 enable flag	D756	M2052	M3078
8	Manual pulse generator 3 enable flag	D757	M2053	M3079

(Note-1): It can also be ordered the device of a remark column.

(2) JOG operation simultaneous start axis setting registers (D710 to D713) ..... Command device

(a) These registers set the virtual servo motor axis No. and direction which start simultaneously the JOG operation.

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0	
D710	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1	Forward rotation JOG
D711	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17	
D712	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1	Reverse rotation JOG
D713	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17	

(Note-1): Make JOG operation simultaneous start axis setting with 1/0.
- 1: Simultaneous start execution
- 0: Simultaneous start not execution

(Note-2): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-3): Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(b) Refer to Section 6.21.3 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the JOG operation simultaneous start.

(3) Manual pulse generator axis No. setting registers (D714 to D719) ..... Command signal

(a) These registers store the virtual servo motor axis No. controlled with the manual pulse generator.

		b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
P1	D714	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
	D715	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17
P2	D716	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
	D717	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17
P3	D718	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
	D719	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17

(Note-1): Make the axis No. controlled with the manual pulse generator setting with 1/0.
- 1 : Specified axis
- 0 : Unspecified axis

(Note-2): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-3): Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(b) Refer to Section 6.22 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the manual pulse generator operation.

(4) Manual pulse generator 1-pulse input magnification setting registers (D720 to D751) ..... Command device

(a) These registers set the magnification (1 to 10000) per pulse of number of the input pulses from manual pulse generator at the pulse generator operation.

1-pulse input magnification setting register	Axis No.	Setting range	1-pulse input magnification setting register	Axis No.	Setting range
D720	Axis 1	1 to 10000	D736	Axis 17	1 to 10000
D721	Axis 2		D737	Axis 18	
D722	Axis 3		D738	Axis 19	
D723	Axis 4		D739	Axis 20	
D724	Axis 5		D740	Axis 21	
D725	Axis 6		D741	Axis 22	
D726	Axis 7		D742	Axis 23	
D727	Axis 8		D743	Axis 24	
D728	Axis 9		D744	Axis 25	
D729	Axis 10		D745	Axis 26	
D730	Axis 11		D746	Axis 27	
D731	Axis 12		D747	Axis 28	
D732	Axis 13		D748	Axis 29	
D733	Axis 14		D749	Axis 30	
D734	Axis 15		D750	Axis 31	
D735	Axis 16		D751	Axis 32	

(Note): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(b) Refer to Section 6.22 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the manual pulse generator operation.

(5) Manual pulse generator smoothing magnification setting registers (D752 to D754) ..... Command device

(a) These registers set the smoothing time constants of manual pulse generators.

Manual pulse generator smoothing magnification setting register	Setting range
Manual pulse generator 1 (P1): D752	0 to 59
Manual pulse generator 2 (P2): D753	
Manual pulse generator 3 (P3): D754	

(b) When the smoothing magnification is set, the smoothing time constant is as indicated by the following expression.
Smoothing time constant (t) = (Smoothing magnification + 1) × 56.8 [ms]

(c) Operation

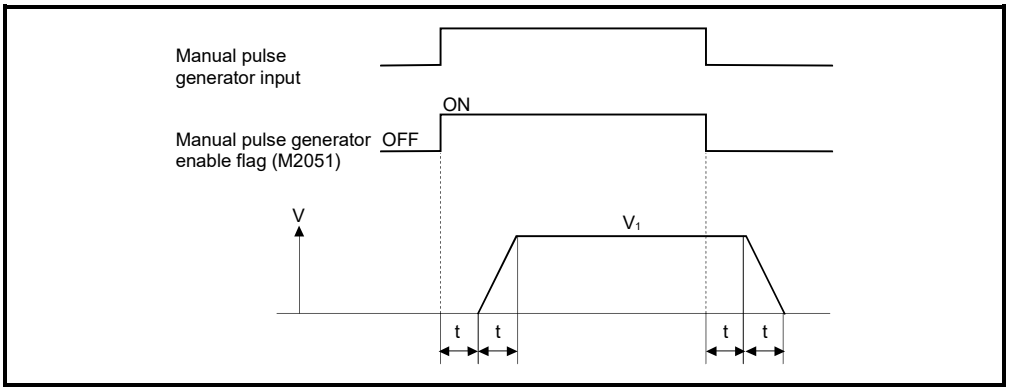

Output speed (V_1) [pulse/s] = (Number of input pulses/s) × (Manual pulse generator 1-pulse input magnification setting)

Travel value (L) = (Number of input pulses) × (Manual pulse generator 1-pulse input magnification setting)

(d) The manual pulse operation in the virtual mode is effective at the only test mode.

REMARK

(1) The smoothing time constant is 56.8[ms] to 3408[ms].

4.3 Motion Registers (#)

There are motion registers (#0 to #12287) in the Motion CPU. #8000 to #8639 are used as the monitor device, #8640 to #8735 are used as the Motion error history device and #8736 to #8751 are used as the product information list device.
Refer to the "Q173D(S)CPU/Q172D(S)Motion Controller (SV13/SV22) Programming Manual (Motion SFC)" for details of the motion registers and Motion error history device.

(1) Monitor devices (#8000 to #8639)

Information for each axis is stored in the monitor devices.
The details of the storage data are shown below.

Axis No.	Device No.	Signal name
1	#8000 to #8019	
2	#8020 to #8039	
3	#8040 to #8059	
4	#8060 to #8079	
5	#8080 to #8099	
6	#8100 to #8119	
7	#8120 to #8139	
8	#8140 to #8159	
9	#8160 to #8179	
10	#8180 to #8199	
11	#8200 to #8219	
12	#8220 to #8239	
13	#8240 to #8259	
14	#8260 to #8279	
15	#8280 to #8299	
16	#8300 to #8319	
17	#8320 to #8339	
18	#8340 to #8359	
19	#8360 to #8379	
20	#8380 to #8399	
21	#8400 to #8419	
22	#8420 to #8439	
23	#8440 to #8459	
24	#8460 to #8479	
25	#8480 to #8499	
26	#8500 to #8519	
27	#8520 to #8539	
28	#8540 to #8559	
29	#8560 to #8579	
30	#8580 to #8599	
31	#8600 to #8619	
32	#8620 to #8639	

	Signal name	Refresh cycle	Signal direction
0	Servo amplifier type	When the servo amplifier power-on	Monitor device
1	Motor current value	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	
2	Motor speed		
3			
4	Command speed	Operation cycle	
5			
6	Home position return re-travel value	At home position return re-travel	
7			
8	Servo amplifier display servo error code	Main cycle	
9	Parameter error No. QDS		
10	Servo status1 QDS	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	
11	Servo status2 QDS		
12	Servo status3 QDS		
13	Unusable	—	—
14	Servo status5 QDS Ver.!	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	Monitor device
15	Unusable	—	—
16			
17			
18	Servo status7 QDS Ver.!	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	Monitor device
19	Unusable	—	—

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(a) Servo amplifier type (#8000+20n) ..... Monitor device
This register stores the servo amplifier type for each axis at the servo amplifier power supply ON.
- 0 ..... Unused
- 256 ..... MR-J3-□B
  MR-J3W-□B (For 2-axis type)
- 257 ..... MR-J3-□B-RJ006 (For fully closed loop control)
  MR-J3-□B Safety (For drive safety servo)
- 258 ..... MR-J3-□B-RJ004 (For Linear servo motor)
- 263 ..... MR-J3-□B-RJ080W (For direct drive motor) Ver.!
- 4096 ..... MR-J4-□B QDS
  MR-J4W-□B (For 2-axis type, 3-axis type) QDS
- 4352 ..... VCⅡ series (Note-1) (CKD Nikki Denso Co., Ltd. make) QDS Ver.!
- 4354 ..... VCⅡ series (For Linear stage) (Note-2)
  (CKD Nikki Denso Co., Ltd. make) Ver.!
- 4359 ..... VCⅡ series (For direct drive motor) (Note-2)
  (CKD Nikki Denso Co., Ltd. make) Ver.!
- 4864 ..... VPH series (Note-1) (CKD Nikki Denso Co., Ltd. make) QDS Ver.!
- 4866 ..... VPH series (For Linear stage) (Note-2)
  (CKD Nikki Denso Co., Ltd. make) QDS Ver.!
- 4871 ..... VPH series (For direct drive motor) (Note-2)
  (CKD Nikki Denso Co., Ltd. make) QDS Ver.!
- 5210 ..... MR-J5-□B QDS Ver.!
  MR-J5W-□B (For 2-axis type, 3-axis type) QDS Ver.!
- 8192 ..... FR-A800-1 (Inverter) QDS Ver.!
- 8193 ..... FR-A800-2 (Inverter) QDS Ver.!
- 8193 ..... IAI electric actuator controller
  (IAI Corporation make) QDS Ver.!
- 8233 ..... 5-phase stepping motor driver
  (ORIENTAL MOTOR Co., Ltd. make) QDS Ver.!
- 8234 ..... Stepping motor driver AlphaStep (AZ series)
  (ORIENTAL MOTOR Co., Ltd. make) QDS Ver.!
- 16640 ..... FR-A700 series (Inverter) Ver.!
  (Note-1): When connecting SSCNETⅢ/H
  (Note-2): When connecting SSCNETⅢ

It is not cleared even if the servo amplifier power supply turns OFF.

(b) Motor current value (#8001+20n) ..... Monitor device
This register stores the motor current value (×0.1[%]) (signed) read from the servo amplifier.

Ver.!: Refer to Section 1.4 for the software version that supports this function.

(c) Motor speed (#8002+20n, #8003+20n) ..... Monitor device
This register stores the motor speed (×0.1[r/min]) (signed) read from the servo amplifier.
The motor speed (×0.1[mm/s]) (signed) is stored at linear servo use.

(d) Command speed (#8004+20n, #8005+20n)..... Monitor device
This register stores the speed (signed) at which command value to the servo amplifier for every operation cycle is converted into [pulse/s].

(e) Home position return re-travel value (#8006+20n, #8007+20n)
.....Monitor device
If the position stopped in the position specified with the travel value after proximity dog ON using MT Developer2 is not zero point, it made to travel to zero point by re-travel in the Motion CPU. The travel value (signed ([pulse] units)) of making it travel to zero point by re-travel at this time is stored.
(Data does not change with the last value in the data setting type.)

(f) Servo amplifier display servo error code (#8008+20n) Ver.!
..... Monitor device
This register stores the servo error code read from the servo amplifier.
The hexadecimal display is the same as the LED of servo amplifier.
Refer to the "Servo amplifier Instruction Manual" for details of the servo error codes.

Servo amplifier type	Servo amplifier LED display
MR-J5(W)-□B QDS Ver.!	Displays 4 digits (Note-1) on the LED display
MR-J4(W)-□B QDS	Displays 3 digits on the LED display
MR-J3-□B	Displays 2 digits on the LED display
MR-J3W-□B	Displays the first 2 digits on the LED display

(Note-1): Alarm No. (3 digits) + Alarm detail No. (1 digit)

(g) Parameter error No. (#8009+20n) QDS ..... Monitor device
The parameter number of error servo parameter is stored in hexadecimal at the servo error occurrence.

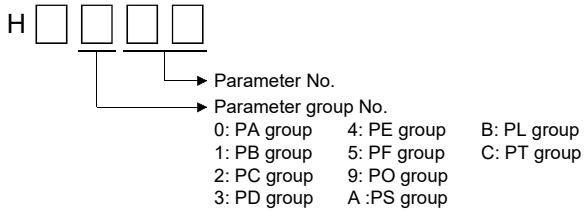

Ver.!: Refer to Section 1.4 for the software version that supports this function.

(h) Servo status1 (#8010+20n) QDS ..... Monitor device

This register stores the servo status read from the servo amplifier.

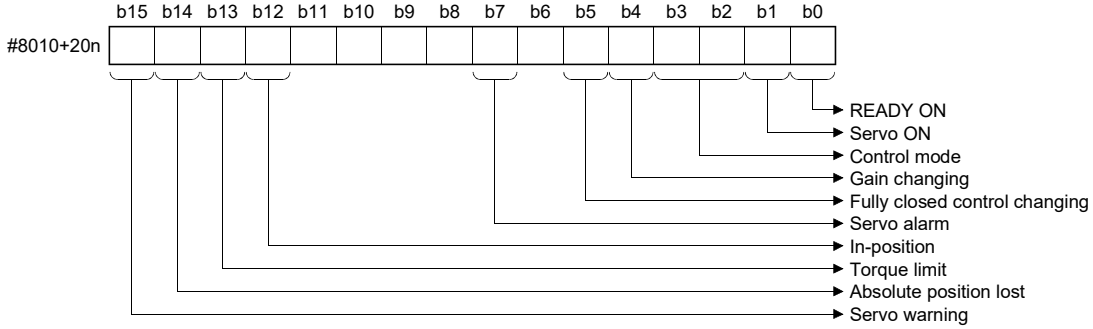

(Note): The 0/1 is stored in the servo status 1.
- 0: OFF
- 1: ON

- READY ON (b0).....Indicates the ready ON/OFF.
- Servo ON (b1).....Indicates the servo ON/OFF.
- Control mode (b2, b3).....Indicates the control mode of the servo amplifier.

b3	b2	Control mode
0	0	Position control mode
0	1	Speed control mode
1	0	Torque control mode

- Gain changing (b4) .....Turns ON when the servo amplifier is gain changing.
- Fully closed control changing (b5) .....Turns ON when the servo amplifier is using fully closed loop control.
- Servo alarm (b7) .....Turn ON during the servo alarm.
- In-position (b12).....The dwell pulse turns ON within the servo parameter "in-position".
- Torque limit (b13).....Turns ON when the servo amplifier is having the torque restricted.
- Absolute position lost (b14).....Turns ON when the servo amplifier has lost the absolute position.
- Servo warning (b15) .....Turn ON during the servo warning.

POINT
Servo warning (b15) turns ON during Motion controller forced stop or servo forced stop.

(i) Servo status2 (#8011+20n) QDS ..... Monitor device

This register stores the servo status read from the servo amplifier.

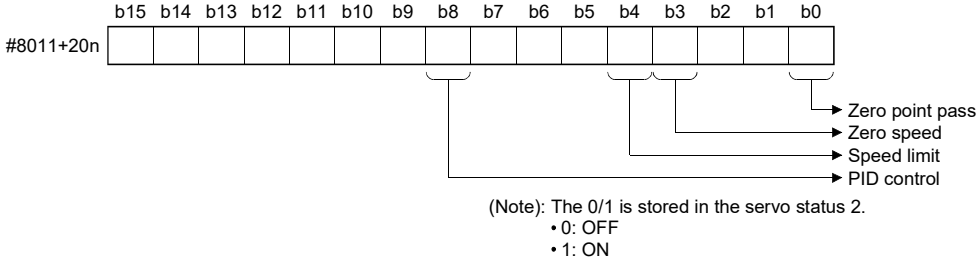

(Note): The 0/1 is stored in the servo status 2.
- 0: OFF
- 1: ON

- Zero point pass (b0).....Turns ON if the zero point of the encoder has been passed even once.
- Zero speed (b3) .....Turns ON when the motor speed is lower than the servo parameter "zero speed."
- Speed limit (b4).....Turn ON during the speed limit in torque control mode.
- PID control (b8).....Turn ON when the servo amplifier is PID control.

(j) Servo status3 (#8012+20n) QDS ..... Monitor device

This register stores the servo status read from the servo amplifier.

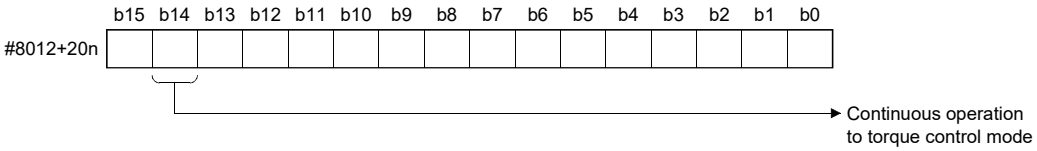

(Note): The 0/1 is stored in the servo status 3.
- 0: OFF
- 1: ON

- Continuous operation to torque control mode (b14) .....Turn ON when the continuous operation to torque control mode.

(k) Servo status5 (#8014+20n) QDS Ver.! ..... Monitor device

This register stores the servo status read from the servo amplifier (MR-J5(W)-☐B).

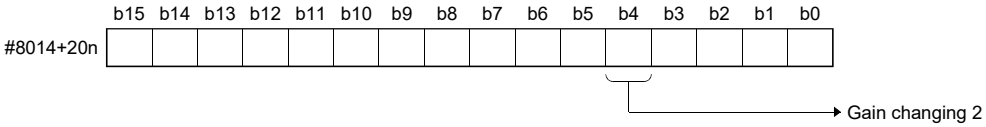

(Note): The 0/1 is stored in the servo status 5.
- 0: OFF
- 1: ON

- Gain changing 2 (b4) .....Turns ON when the servo amplifier (MR-J5(W)-☐B) is in gain changing 2.

Ver.!: Refer to Section 1.4 for the software version that supports this function.

(l) Servo status7 (#8018+20n) QDS Ver.! ..... Monitor device

This register stores the servo status read from the servo amplifier.

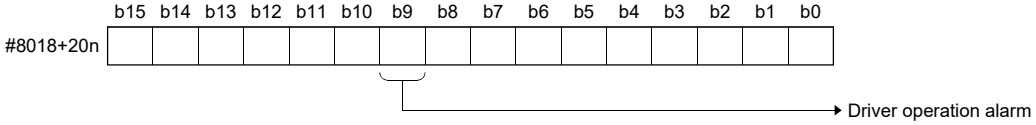

(Note): The 0/1 is stored in the servo status 7.
- 0: OFF
- 1: ON

• Driver operation alarm (b9) .....Turn ON when the driver operation alarm occurs.

Ver.!: Refer to Section 1.4 for the software version that supports this function.

(2) Product information list devices (#8736 to #8751) Ver.!

The operating system software version and serial number of Motion CPU is stored in ASCII code.
The product information list devices are shown below.

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
#8736 to #8743	Operating system software version	At power on		Monitor device
#8744 to #8751	Motion CPU module serial number			

(a) Operating system software version (#8736 to #8743) ..... Monitor device
The operating system software version of Motion CPU displayed on the system monitor (product information list) of GX Works2/GX Developer is stored in ASCII code.
(Example) Operating system software version: "SV22j VER300A"

	Device No.															
	#8736		#8737		#8738		#8739		#8740		#8741		#8742		#8743	
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High
ASCII code	20H	53H	56H	32H	32H	6AH	20H	20H	56H	45H	52H	33H	30H	30H	41H	20H
Character	␣	S	V	2	2	j	␣	␣	V	E	R	3	0	0	A	␣

␣ : Space.

(b) Motion CPU module serial number (#8744 to #8751) ..... Monitor device
The serial number of Motion CPU displayed on the system monitor (product information list) of GX Works2/GX Developer is stored in ASCII code.
(Example) Serial number: "A7Z123015"

	Device No.															
	#8744		#8745		#8746		#8747		#8748		#8749		#8750		#8751	
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High
ASCII code	41H	37H	5AH	31H	32H	33H	30H	31H	35H	20H	20H	20H	20H	20H	20H	20H
Character	A	7	Z	1	2	3	0	1	5	␣	␣	␣	␣	␣	␣	␣

␣ : Space.

POINT

Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion Controller User's Manual" or "Q173D(S)CPU/Q172D(S)CPU Motion Controller Programming Manual (COMMON)" for checking of the operating system software version and serial number.

Ver.! : Refer to Section 1.4 for the software version that supports this function.

4.4 Special Relays (SM)

There are 2256 special relay points of SM0 to SM2255 in the Motion CPU.
Of these, devices in a Table 4.4 are used for the positioning control.
The special relay list used for the positioning control is shown below.
(Refer to " Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for the application of special relays except below.)

Table 4.4 Special relay list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal type
SM500	PCPU READY complete flag	Main cycle		Status signal
SM501	TEST mode ON flag			
SM502	External forced stop input flag	Operation cycle		
SM503	Digital oscilloscope executing flag	Main cycle		
SM506	External forced stop input ON latch flag Ver.!	Operation cycle		
SM508	Amplifier-less operation status flag	Main cycle		
SM510	TEST mode request error flag			
SM512	Motion CPU WDT error flag			
SM513	Manual pulse generator axis setting error flag			
SM516	Servo program setting error flag			

(1) PCPU READY complete flag (SM500) ..... Status signal

This flag is used as judgement of the normal or abnormal in the Motion CPU side using the sequence program.

(a) At leading edge of PLC ready flag (M2000), the fixed parameters, servo parameters and limit switch output data are checked, and if error is not detected, this flag turns on.
The servo parameters are written to the servo amplifiers and the M-codes are cleared.

(b) This flag turns off when the PLC ready flag (M2000) turns off.

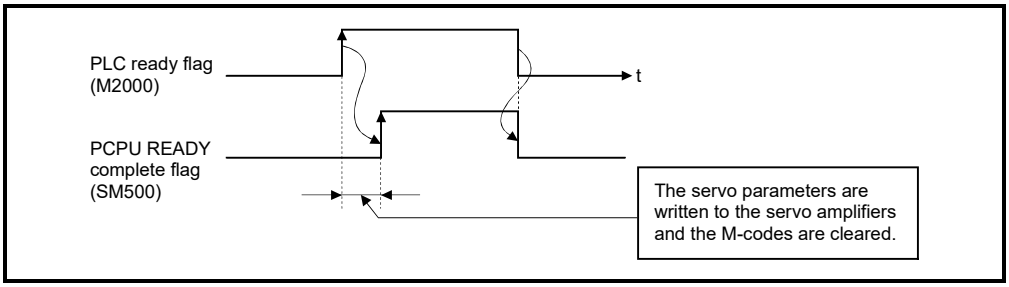

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(2) TEST mode ON flag (SM501) ..... Status signal

(a) This flag is used as judgement of during the test mode or not using MT Developer2.
Use it for an interlock, etc. at the starting of the servo program using the Motion SFC program.
• OFF.....Except the test mode
• ON.....During the test mode

(b) If the test mode is not executed in the test mode request from MT Developer2, the TEST mode request error flag (SM510) turns on.

(3) External forced stop input flag (SM502) ..... Status signal

This flag is used to check the external forced stop input signal ON/OFF.
• OFF ..... External forced stop input ON
• ON ..... External forced stop input OFF

POINT

(1) If the forced stop signal is input during positioning, the operation is as follows.
• When using Q173DSCPU/Q172DSCPU
The feed current value becomes the same value as the real current value.
• When using Q173DCPU(-S1)/Q172DCPU(-S1)
The feed current value is advanced within the rapid stop deceleration time set in the parameter block.
At the same time, the servo OFF state is established because the all axes servo ON command (M2042) turns off.
When the rapid stop deceleration time has elapsed after input of the forced stop signal, the feed current value returns to the value at the point when the emergency stop was initiated.
(2) If the forced stop is cancelled while the rapid stop deceleration time isn't progressing, an overspeed error or error excessive error may occur.

(4) Digital oscilloscope executing flag (SM503) ..... Status signal

This flag is used to check the state of execution for the digital oscilloscope.
• OFF ..... Digital oscilloscope has stopped.
• ON ..... Digital oscilloscope is executing.

(5) External forced stop input ON latch flag (SM506) Ver.!
..... Status signal

This flag turns on when an external forced stop input is detected.
After that, it remains ON even if the external forced stop input is cancelled.
Reset the external forced stop input ON latch flag using the Motion SFC program.
• OFF ..... External forced stop input is not detected.
• ON ..... External forced stop input is detected.

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(6) Amplifier-less operation status flag (SM508) ..... Status signal

This flag is used to check the state of amplifier-less operation.

- OFF ..... During normal operation
- ON ..... During amplifier-less operation

(7) TEST mode request error flag (SM510) ..... Status signal

(a) This flag turns on when the test mode is not executed in the test mode request using MT Developer2.

(b) When SM510 turns on, the error contents are stored in the test mode request error information (SD510, SD511).

(8) Motion CPU WDT error flag (SM512)..... Status signal

This flag turns on when a WDT error (watchdog timer error) is detected of the Motion CPU self-diagnosis function.
When the Motion CPU detects a WDT error, it executes an immediate stop without deceleration of the operating axes.
If the Motion CPU WDT error flag has turn on, reset the Multiple CPU system.
If SM512 remains on after resetting, there is a fault at the Motion CPU side.
The error cause is stored in the "Motion CPU WDT error cause (SD512)".
(Refer to Section 4.5(7)).

(9) Manual pulse generator axis setting error flag (SM513)
..... Status signal

(a) This flag is use as judgement of normal or abnormal setting of the manual pulse generator axis No. setting registers (D714 to D719).
- OFF.....D714 to D719 is normal
- ON.....D714 to D719 is abnormal

(b) This flag turns ON by turning ON the manual pulse generator enable flag (M2051 to M2053) with the manual pulse generator axis P1 to P3 unused after setting the manual pulse generator interface module (Q173DPX) in the system setting.

(c) When SM513 turns on, the error contents are stored in the manual pulse generator axis setting error information (SD513 to SD515).

(10) Servo program setting error flag (SM516) ..... Status signal

This flag is used as judgement of normal or abnormal for the servo program positioning data.

- OFF..... Normal
- ON ..... Abnormal

4.5 Special Registers (SD)

There are 2256 special register points of SD0 to SD2255 in the Motion CPU.
Of these, devices in a Table 4.5 are used for the positioning control.
The special register list used for the positioning control is shown below.
(Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for the applications of special registers except below.)

Table 4.5 Special register list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
SD200	State of switch	Main cycle		Monitor device
SD500	Real mode axis information register (SV22)			
SD501				
SD502	Servo amplifier loading information	At power supply on/ operation cycle		
SD503				
SD504	Real mode/virtual mode switching error information (SV22)	At virtual mode transition		
SD505				
SD506				
SD508	SSCNET control (status)	Main cycle		
SD510	Test mode request error information	At test mode request		
SD511				
SD512	Motion CPU WDT error cause	At Motion CPU WDT error occurrence		
SD513	Manual pulse generator axis setting error information	At the manual pulse generator enable flag OFF to ON		
SD514				
SD515				
SD516	Error program No.	At start		
SD517	Error item information			
SD522	Motion operation cycle	Operation cycle		
SD523	Operation cycle of the Motion CPU setting	At power supply on		
SD524	Maximum Motion operation cycle QDS	Operation cycle		
SD550	System setting error information QDS	At System setting error occurrence		
SD551				
SD560	Operation method QDS Ver.!	At power supply on		
SD803	SSCNET control (command)		Main cycle	Command device

(1) State of switch (SD200) ..... Monitor device

The switch state of CPU is stored in the form of the following.

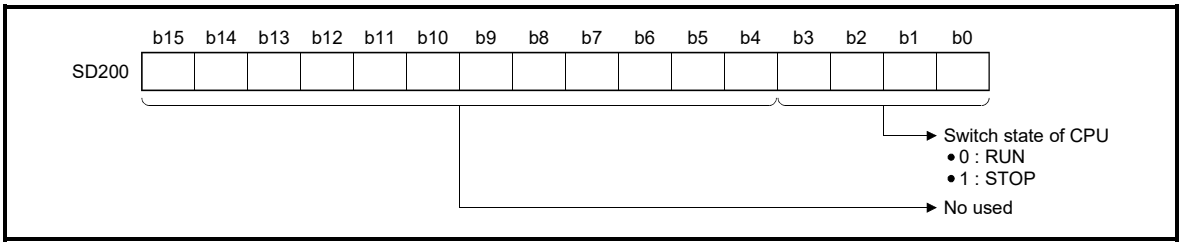

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(2) Real mode axis information register (SD500, SD501)

..... Monitor device

This signal is used to store the information used as a real mode axis at the time of switching from real mode to virtual mode.
The real mode axis information does not change at the time of switching from virtual mode to real mode.

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD500	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
SD501	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17

→ Real mode axis information
- 0 : Except real mode axis
- 1 : Real mode axis

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-2): Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(3) Servo amplifier loading information (SD502, SD503)

..... Monitor device

The mounting status of the servo amplifier is checked at the power supply on or reset of the Multiple CPU system and its results are stored in this device.
If communication with servo amplifier stops, it is reset.
The mounting status of changed axis after the power supply on is stored.

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD502	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
SD503	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17

→ Servo amplifier mounting status
- 0: Not mounted
- 1: Mounted

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-2) : Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(a) Servo amplifier mounting status

1) Mounting status

- Mounted ..…..... The servo amplifier is normal. (Communication with the servo amplifier is normal.)
- Not mounted .... The servo amplifier is not mounted.
  The servo amplifier control circuit power is off.
  Normal communication with the servo amplifier is not possible due to a connecting cable fault, etc.

2) The system settings and servo amplifier mounting status are shown below.

System Settings	Servo amplifier	
	Mounted	Not mounted
Used (axis No. setting)	1 is stored	0 is stored
Unused	0 is stored	

(4) Real mode/virtual mode switching error information (SD504 to SD506) ..... Monitor device

When a mode switching error occurs in real-to-virtual or virtual-to-real mode switching, or a mode continuation error occurs in the virtual mode, its error information is stored.

Refer to APPENDIX 1.7 for details of the stored error code.

The axis error code among the error codes stored in SD504 to SD506 is shown below.

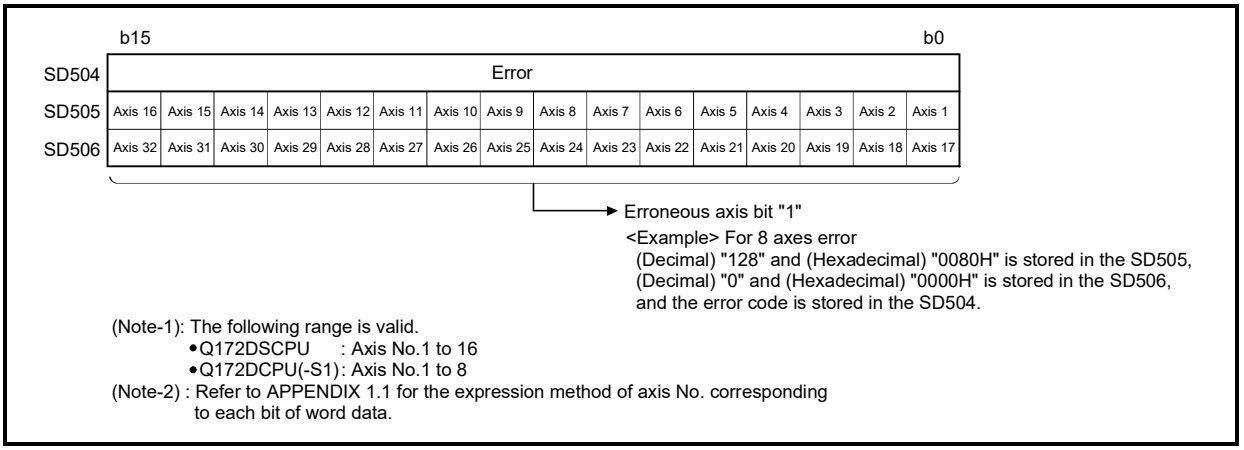

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-2) : Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(5) SSCNET control (status) (SD508) ..... Monitor device

SSCNET control (status) (SD508) stores the executing state for connect/disconnect of SSCNET communication and start/release of amplifier-less operation.

- 0 ..... Command accept waiting
- -1 ..... Execute waiting
- -2 ..... Executing

Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller programming Manual (COMMON)" for details of the SSCNET control function.

(6) Test mode request error information (SD510, SD511) ..... Monitor device

If there are operating axis at a test mode request using MT Developer2, a test mode request error occurs, the test mode request error flag (SM510) turns on, and the during operation/stop data of each axis are stored.

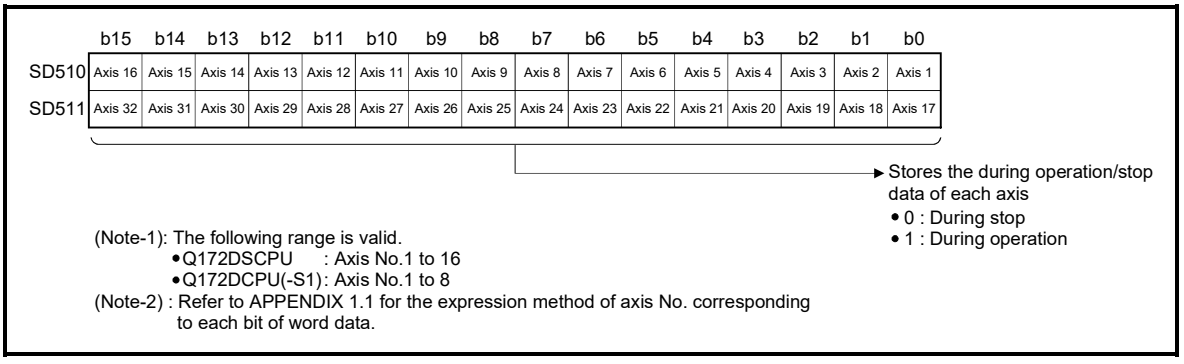

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1): Axis No.1 to 8

(Note-2) : Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(7) Motion CPU WDT error cause (SD512) ..... Monitor device

This register is used as judgement of the error contents in the Motion CPU.

Error code	Error cause	Operation when error occurs	Action to take
1	S/W fault 1	All axes stop immediately, after which operation cannot be started.	• Reset the Multiple CPU system. • If the an operation cycle time over reoccurs after resetting, or a main cycle is lengthened (more than 1.0[s]), 1) Change the operation cycle into a large value in the system setting. 2) Reduce the number of command execution of the event task or NMI task in the system setting.
2	Operation cycle time over		
4	WDT error		• Reset the Multiple CPU system. • If the error reoccurs after resetting, explain the error symptom and get advice from our sales representative.
300	S/W fault 3		
303	S/W fault 4		
304	RIO WDT error		

(8) Manual pulse generator axis setting error information (SD513 to SD515) ..... Monitor device

The setting information is checked at leading edge of manual pulse generator enable signal, if an error is found, the following error information is stored into SD513 to SD515 and the manual pulse generator axis setting error flag (SM513) turns on.

If there is an unused setting error for the manual pulse generator axis, a correspondence bit of SD513 turns ON.

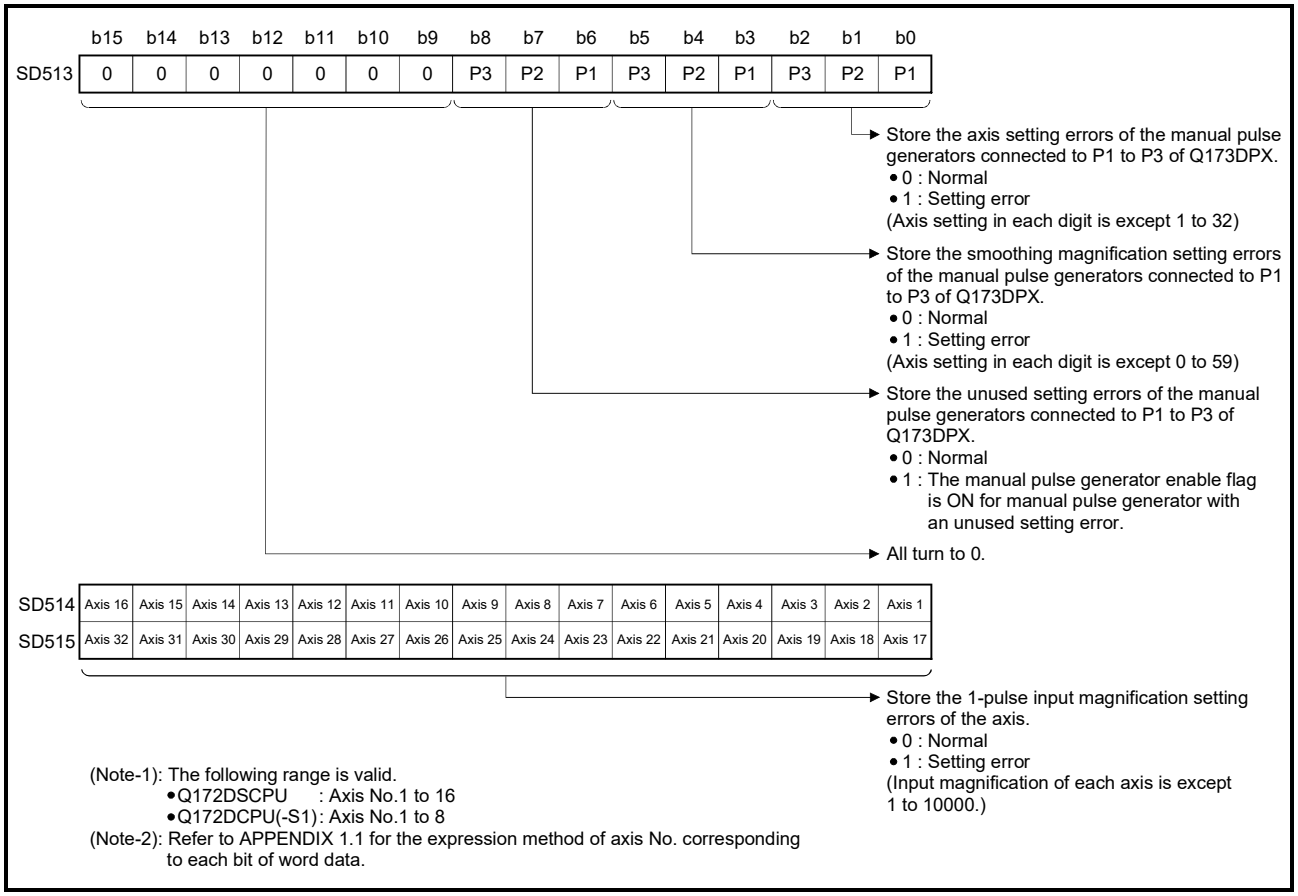

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(Note-2): Refer to APPENDIX 1.1 for the expression method of axis No. corresponding to each bit of word data.

(9) Error program No. (SD516) ..... Monitor device

(a) When the servo program error occurs at the servo program start, the servo program setting error flag (SM516) turns on and the error servo program No. (0 to 4095).

(b) If an error occurs in another servo program when error program No. has been stored, the program No. of the new error is stored.

(10) Error item information (SD517) ..... Monitor device

When the servo program error occurs at the servo program start, the servo program setting error flag (SM516) turns on and the error code corresponds to the error setting item is stored.
Refer to APPENDIX 1.3 for details of servo program setting errors.

(11) Motion operation cycle (SD522) ..... Monitor device

The time which motion operation took for every motion operation cycle is stored in [μs] unit.

(12) Operation cycle of the Motion CPU setting (SD523)
..... Monitor device

The setting operation cycle is stored in [μs] unit.
When the "Default Setting" is set in the system setting, the operation cycle corresponding to the number of setting axes. When "0.2[ms]QDS/ 0.4[ms] / 0.8[ms] / 1.7[ms] / 3.5[ms] / 7.1[ms] /14.2[ms]QD" is set in the system setting, the operation cycle corresponding to each setting.
(Note): If the servo amplifiers of 9 axes or more are connected to one SSCNETⅢ line, it does not support an operation cycle of 0.4[ms]. 0.8[ms] is used as the real operation cycle, even if 0.4[ms] is set in the system setting.

(13) Maximum Motion operation cycle (SD524) QDS
..... Monitor device

The maximum time for motion operation is stored every motion operation cycle in [μs] unit.

(14) System setting error information (SD550,SD551) QDS
..... Monitor device

The error code and error individual information are stored at the system setting error occurrence.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for details of the system setting errors.

(15) Operation method (SD560) QDS Ver.! ..... Monitor device

When the operating system software is SV22, the operation method information is stored.

- 0 ..... Virtual mode switching method
- 1 ..... Advanced synchronous control method

(16) SSCNET control (command) (SD803) ..... Command device

SSCNET control (command) (SD803) is required for connect/disconnect of SSCNET communication and start/release of amplifier-less operation.

- 0 ..... No command
- 1 to 32 ..... Disconnect command of SSCNET communication
- -10 ..... Re-connect command of SSCNET communication
- -20 ..... Start command 1 of amplifier-less operation (EMI invalid)
- -21 ..... Start command 2 of amplifier-less operation (EMI valid)
- -25 ..... Release command of amplifier-less operation
- -2 ..... Execute command

Refer to the "Q173DCPU/Q172DCPU Motion controller Programming Manual (COMMON)" for details of the SSCNET control function.

Ver.! : Refer to Section 1.4 for the software version that supports this function.

MEMO

5. MECHANICAL SYSTEM PROGRAM

This section describes the mechanical system program in the virtual mode.

In the mechanical system program (Mechanical support language), what was performing synchronous control by hardware using the gear, shaft, belt, pulley, cam or infinitely variable speed changer, etc. is transposed to software, and same operation control is performed.
The mechanical system program is composed with the mechanical module connection diagram and mechanical module parameter.

- The mechanical module connection diagram shows the virtual mechanical system which connected the virtual mechanical modules.
- The mechanical module parameters are used to control of the mechanical modules used at the mechanical module connection diagram.

Refer to the mechanical module parameter lists shown in Chapters 6 to 8 for the mechanical module parameters.

5.1 Mechanical Module Connection Diagram

The mechanical module connection diagram shows a virtual system diagram which arranged the mechanical modules and was composed.
Configuration of the mechanical module connection is shown in Fig. 5.1 below.

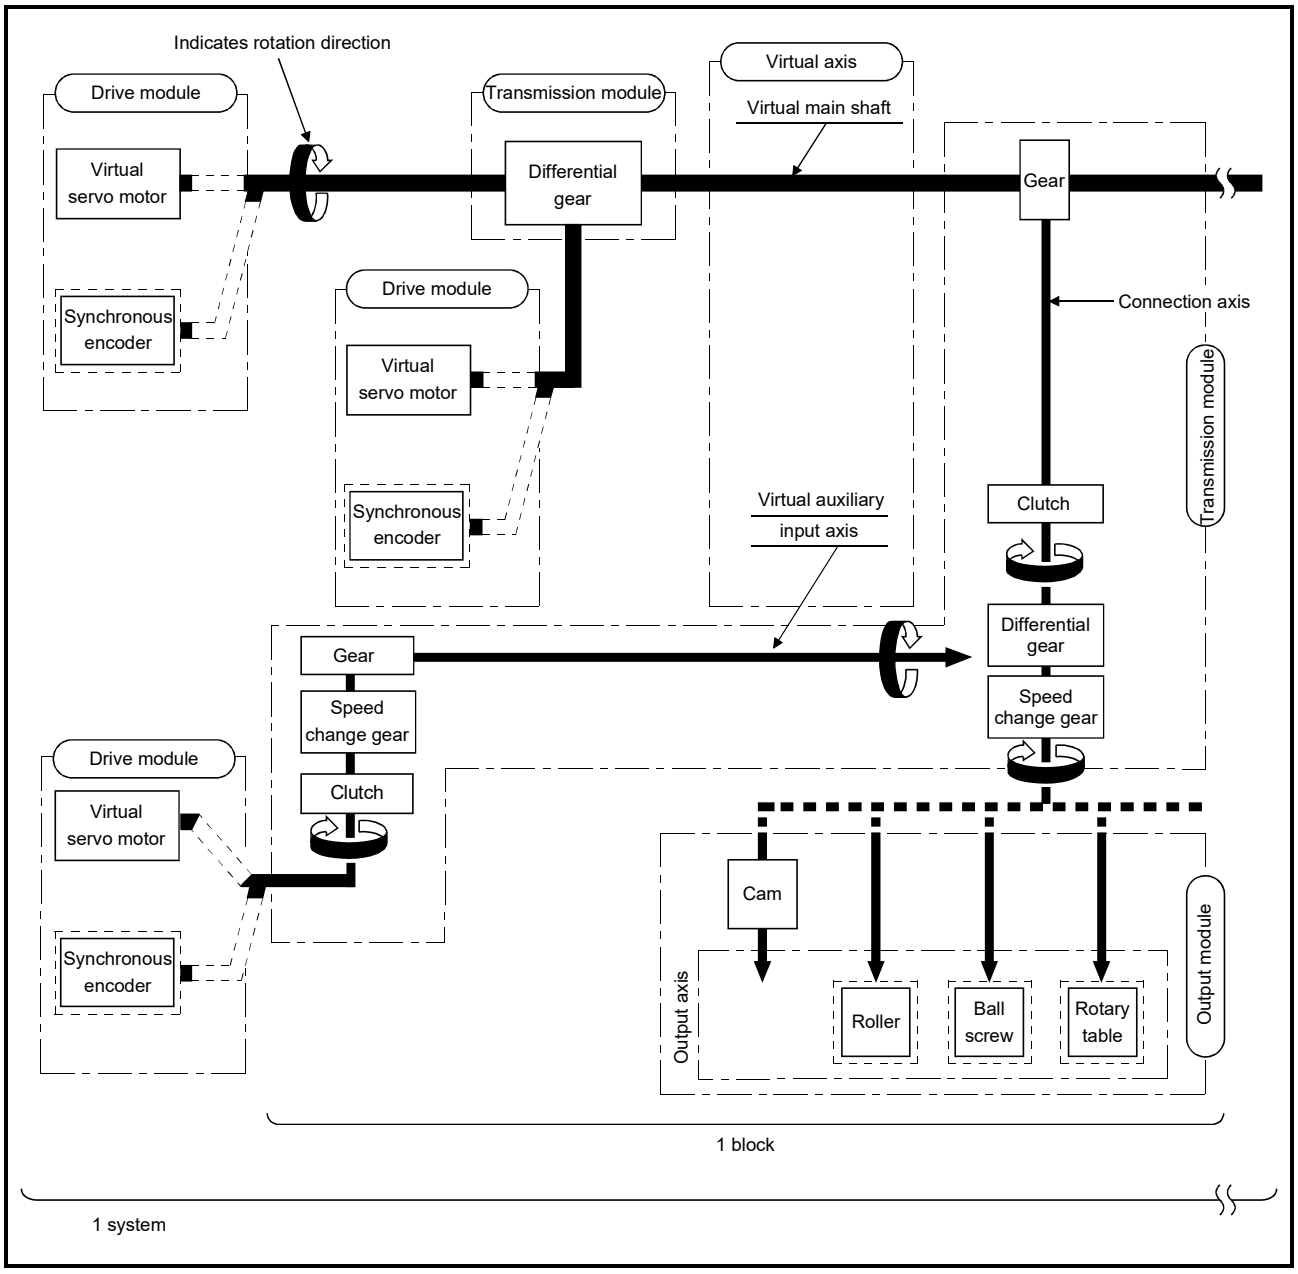

Fig. 5.1 Configuration of the Mechanical Module Connection

POINT

(1) Either a virtual servo motor or a synchronous encoder can be connected in the drive module.
(2) One of the cam, roller, ball screw or rotary table can be connected in the output module.

(1) Block

The term "block" is one relation from the virtual transmission module (gear) connected to the virtual main shaft to the output module.
Refer to Section 5.2 for the number of mechanical modules which can be connected in one block.

(2) System

The term "system" is a generic term of multiple blocks connected to one virtual main shaft.
The number of blocks connectable with one system is up to 32 blocks.

(3) Transmission module connections

There are 3 transmission module connection patterns:

- Pattern 1..... Without a differential gear.
- Pattern 2..... Without a speed change gear at the output side of the differential gear.
- Pattern 3..... With a speed change gear at the output side of the differential gear.

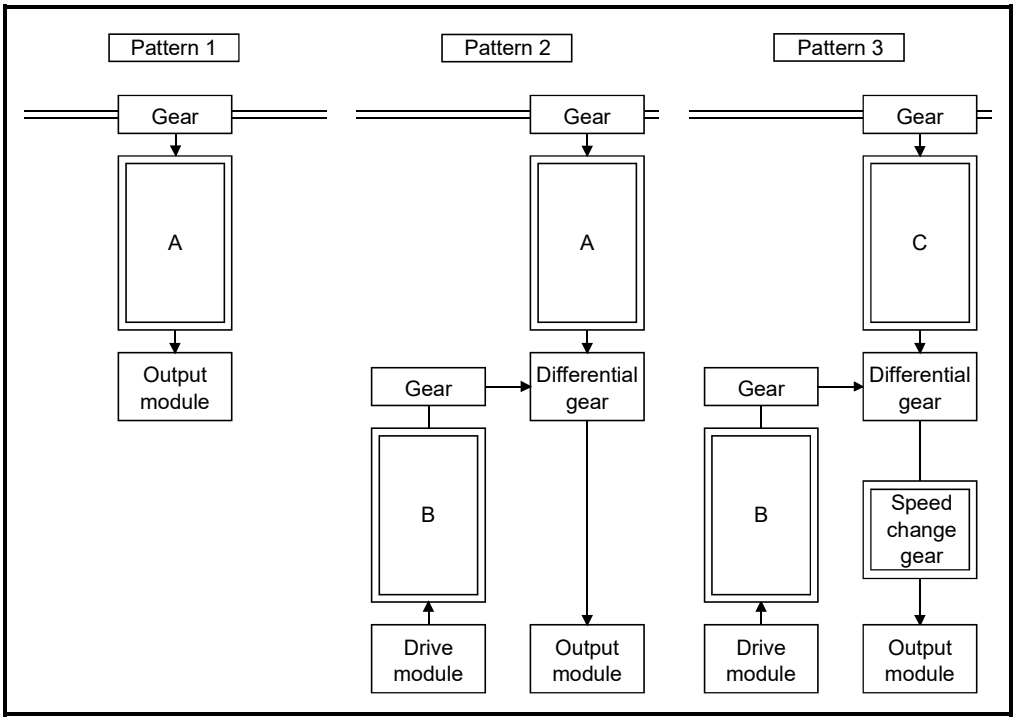

(a) Transmission modules which can be connected at "A" and "B" above

1) A clutch, speed change gear, and "clutch + speed change gear" can be connected at "A" and "B".

2) If a "clutch + speed change gear" are used, connection constraints have not restrictions.

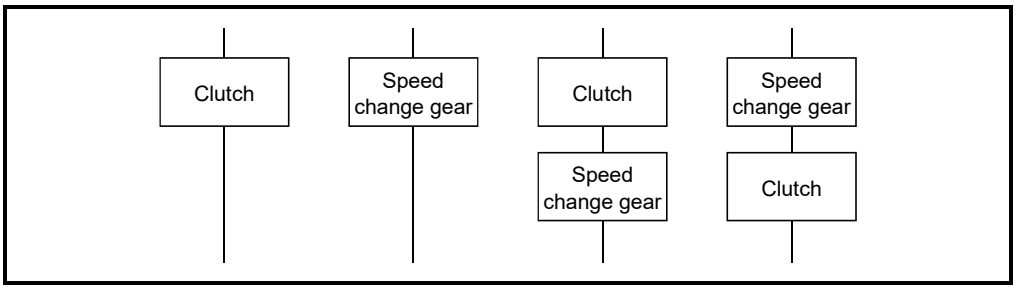

(b) Transmission module which can be connected at "C" (pattern 3)

Only a clutch can be connected at "C".

MEMO

5.2 Mechanical Module List

An overview of the mechanical modules used at the mechanical module connection diagrams in the virtual mode is shown in Tables 5.1.
Refer to Chapter 6 to 8 for details of each mechanical module.

Table 5.1 Mechanical Module List

Classification	Mechanical Module		Maximum Number of Usable										
			Q173DSCPU						Q172DSCPU				
	Name	Appearance	Number Per Motion CPU module		Number Per System		Number Per Block		Number Per Motion CPU module		Number Per System		Number Per Block	
							Connection Shaft Side	Auxiliary Input Axis Side					Connection Axis Side	Auxiliary Input Axis Side
Drive module	Virtual servo motor		32	Total 44	32	Total 34	—	—	16	Total 28	16	Total 18	—	—
	Synchronous encoder		12		12		—	—	12		12		—	—
Virtual axis	Virtual main shaft	—	32	Total 64	32		—	—	16	Total 32	16		—	—
	Virtual auxiliary input axis	—	32		32		—	—	16		16		—	—
Transmission module	Gear		64		64		1	1	32		32		1	1
	Direct clutch		64		64		1	1	32		32		1	1
	Smoothing clutch													
	Speed change gear		64		64		1	1	32		32		1	1
	Differential gear		32		32		1	—	16		16		1	—
	Differential gear to main shaft		32		1		—		16		1		—	

Maximum Number of Usable											Function Description	Section
Q173DCPU(-S1)						Q172DCPU(-S1)						
Number Per Motion CPU module		Number Per System		Number Per Block		Number Per Motion CPU module		Number Per System		Number Per Block		
				Connection Shaft Side	Auxiliary Input Axis Side					Connection Axis Side	Auxiliary Input Axis Side	
32	Total 44	32	Total 34	—	—	8	Total 16	8	Total 10	—	—	• It is used to drive the virtual axis of mechanical system program by the servo program or JOG operation.	Section 6.1
12		12		—	—	8		8		—	—	• It is used to drive the virtual axis by the input pulses from the external synchronous encoder.	Section 6.2
32	Total 64	32		—	—	8	Total 16	8		—	—	• This is a virtual "link shaft". • Drive module rotation is transferred to the transmission module.	—
32		32		—	—	8		8		—	—	• This is the auxiliary input axis for input to the differential gear of transmission module. • It is automatically displayed when a differential gear and gear are connected.	—
64		64		1	1	16		16		1	1	• The drive module rotation is transmitted to the output axis. • A setting gear ratio is applied to the travel value (pulse) input from the drive module, and then transmits to the output axis that it becomes in the setting rotation direction.	Section 7.1
64		64		1	1	16		16		1	1	• Transmit or separate the drive module rotation to the output module. • There are a direct clutch transmitted directly and the smoothing clutch which performs the acceleration/deceleration and transmission by the smoothing time constant setting at the switching ON/OFF of the clutch. • It can be selected the ON/OFF mode, address mode or the external input mode depending on the application. • Time constant system or slippage system can be selected as a smoothing method.	Section 7.2
64		64		1	1	16		16		1	1	• It is used to change the speed of output module (roller). • The setting speed change ratio is applied to input axis speed, and transmits to the output axis.	Section 7.3
32		32		1	—	8		8		1	—	• Auxiliary input axis rotation is subtracted from virtual main shaft rotation and the result is transmitted to the output axis.	Section 7.4
32		1		—		8		1		—		• Auxiliary input axis rotation is subtracted from virtual main shaft rotation, and the result is transmitted to the output axis. (Connected to the virtual main shaft)	

Table 5.1 Mechanical Module List (Continued)

Classification	Mechanical Module		Maximum Number of Usable												
			Q173DSCPU						Q172DSCPU						
	Name	Appearance	Number Per Motion CPU module		Number Per System		Number Per Block		Number Per Motion CPU module		Number Per System		Number Per Block		
							Connection Shaft Side	Auxiliary Input Axis Side					Connection Axis Side	Auxiliary Input Axis Side	
Output module	Roller		32	Total 32	32	Total 32	1	1	16	Total 16	16	Total 16	1	1	
	Ball screw		32		32				16		16				
	Rotary table		32		32				16		16				
	Cam		32		32				16		16				

	Maximum Number of Usable										Function Description	Section
	Q173DCPU(-S1)						Q172DCPU(-S1)					
	Number Per Motion CPU module		Number Per System		Number Per Block		Number Per Motion CPU module		Number Per System		Number Per Block			
					Connection Shaft Side	Auxiliary Input Axis Side					Connection Axis Side	Auxiliary Input Axis Side		
	32	Total 32	32	Total 32	1	1	8	Total 8	8	Total 8	1	1	• It is used to perform the speed control at the final output.	Section 8.1
	32		32				8		8				• It is used to perform the linear positioning control at the final output.	Section 8.2
	32		32				8		8				• It is used to perform the angle control at the final output.	Section 8.3
	32		32				8		8				• It is used to perform the position control based on the cam pattern setting data. • There are 2 cam control modes: the two-way cam and feed cam.	Section 8.4

MEMO

6. DRIVE MODULE

The drive module is the source of drive for the virtual axis (virtual main shaft, virtual auxiliary input axis).
There are following 2 types drive module.
• Virtual servo motor ..... Refer to Section 6.1
• Synchronous encoder ..... Refer to Section 6.2

POINT
Set the travel value of drive module so large as possible to prevent the speed fluctuation of output module in the mechanical system program. If the travel value of drive module is small, the speed fluctuation of output module may occur depending on the setting for transmission module.

6.1 Virtual Servo motor

The virtual servo motor is used to operate the virtual axis (virtual main shaft, virtual auxiliary input axis) using the servo program or JOG operation.
Virtual servo motor operation and parameters are shown below.

6.1.1 Operation description

(1) Operation

When the virtual servo motor is started, the pulses are transmitted to the virtual axis (virtual main shaft, virtual auxiliary input axis) by the start conditions (command speed, travel value).
The transmitted pulses are transmitted to the output module connected via the transmission module (gear, differential gear, clutch, speed change gear).

(2) Starting method

The virtual servo motor is started using the servo program or JOG operation.

(a) Start using the servo program

The servo program of Motion SFC program (motion control step) is executed. At this time, the start accept flag (Note-1) (M2001 to M2032) of the starting axis turns on.
Example of the Motion SFC program is shown below.

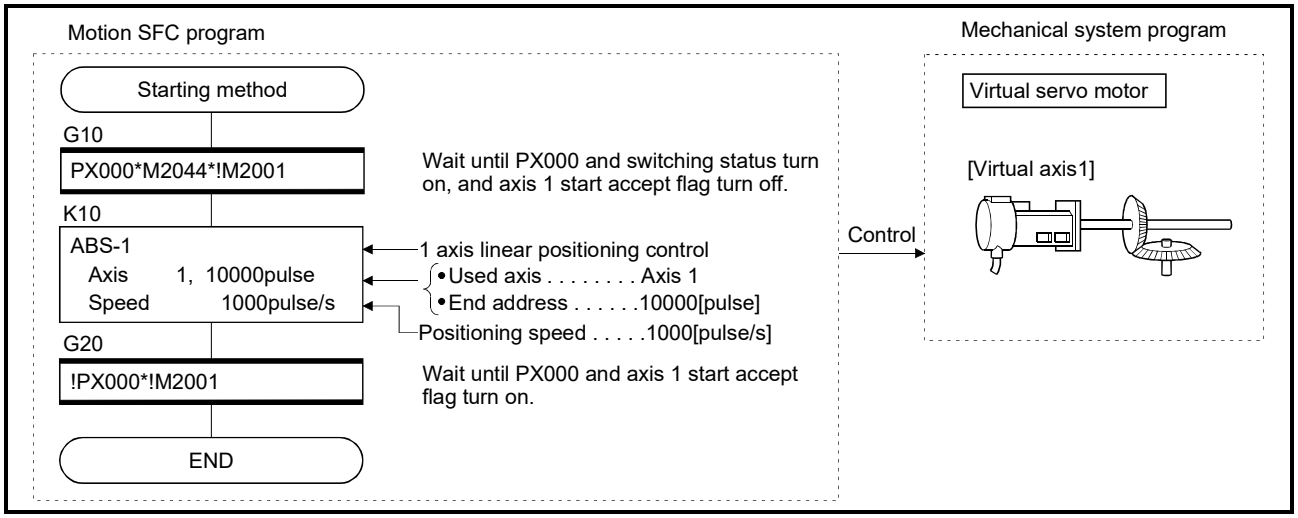

(Note) : Example of the above Motion SFC program is started using the automatic start or sequence program.

REMARK

(Note-1): Refer to Section 4.1.7 (2) for details of the start accept flag.

(b) Start using the JOG operation

An individual start and simultaneous start can be executed in the JOG operation (Note-1).

1) Individual start

.....It is started by turning on the forward/reverse JOG command (Note-2) of each axis.

Motion SFC program for which executes the JOG operation is shown below.

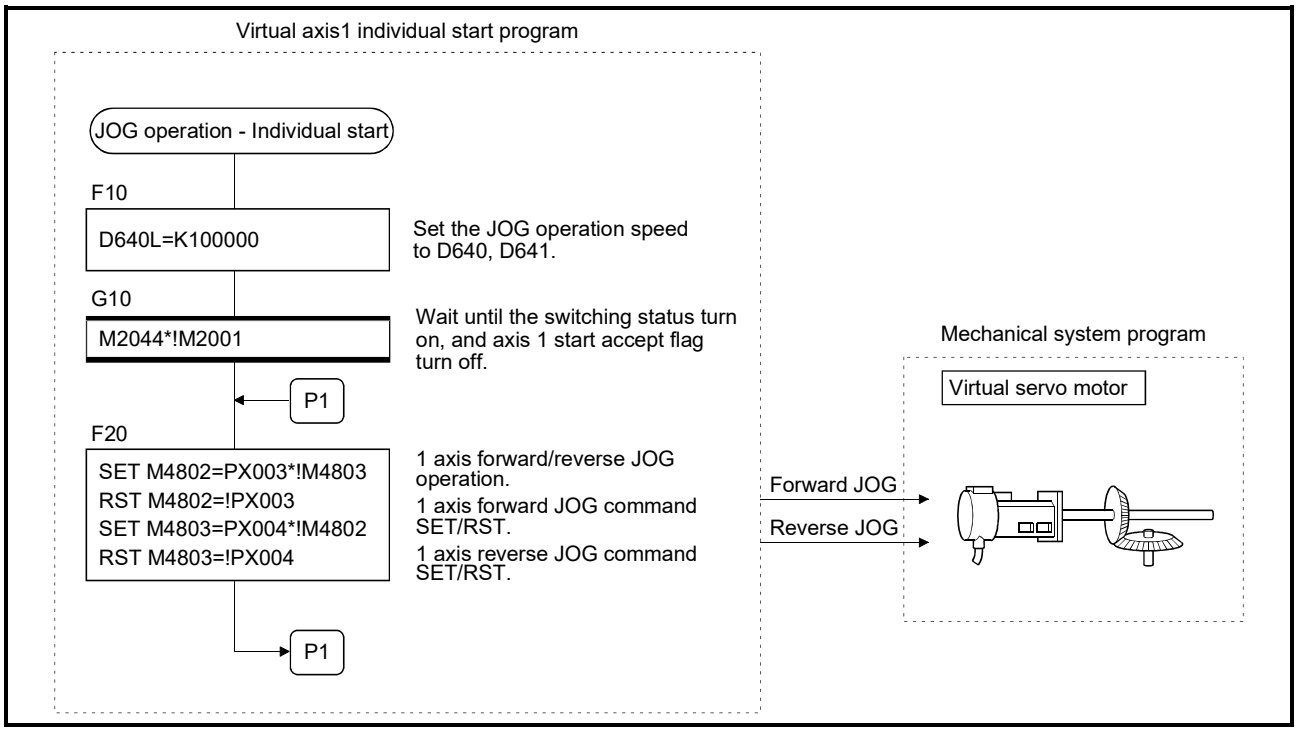

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

2) Simultaneous start

.....The simultaneous start axis No. and directions (forward/reverse) are set by the JOG operation simultaneous start axis setting register (D710 to D713) (Note-3), and it is started by turning on the JOG operation simultaneous start command flag (M2048) (Note-3).

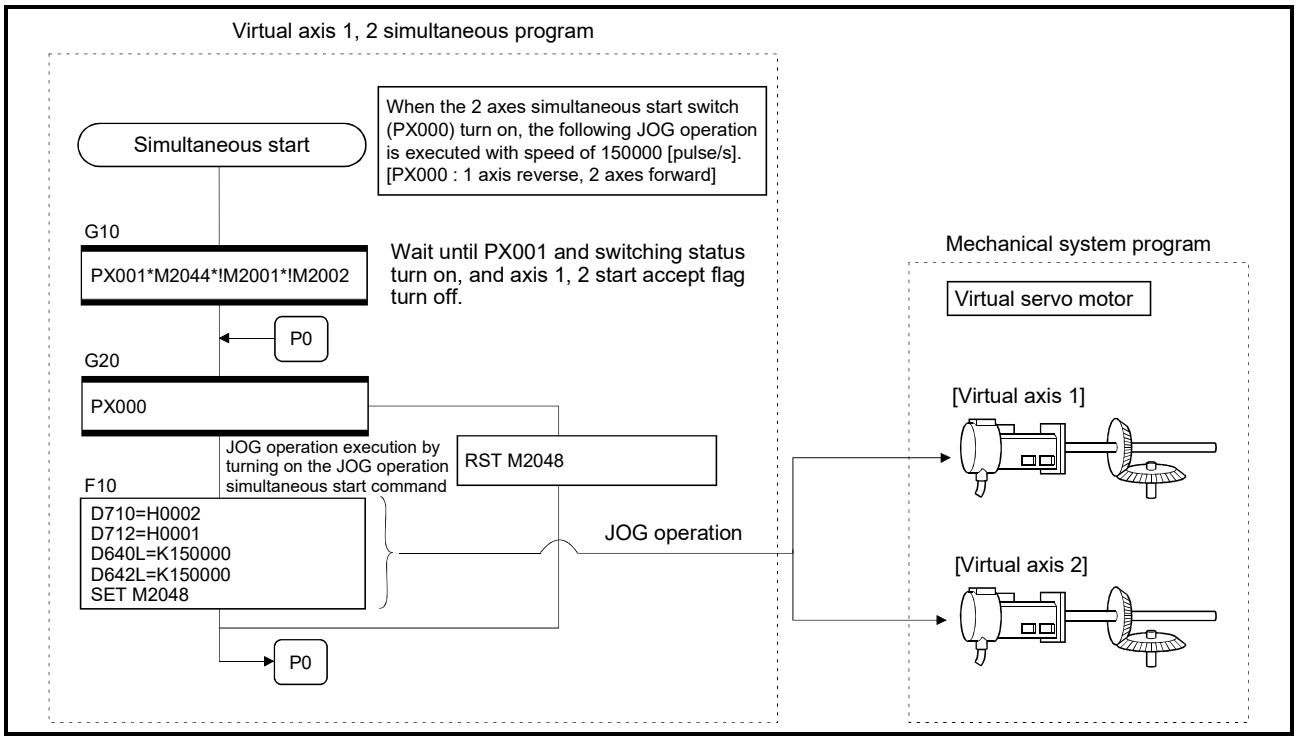

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

REMARK

(Note-1): Refer to Section "6.21 JOG Operation" of the "Q173D(S)CPU/ Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the JOG operation.

(Note-2): Refer to Section 4.1.4 (3) for details of the forward/reverse rotation JOG start commands.

(Note-3): Refer to Section 4.2.8 (2) for details of the JOG operation simultaneous start axis setting registers, and Section 4.1.7 (14) for details of the JOG operation simultaneous start command.

(3) Stopping method during operation

When the virtual servo motor is stopped during operation after the start, turn the stop command (M4800+20n)/rapid stop command (M4801+20n) on using the Motion SFC program.
(There are no external stop causes (STOP, FLS, RLS) for the virtual servo motor.)

(4) Control items

(a) It is controlled as the virtual servo motor backlash compensation amount "0" at the positioning control.

(b) The deviation counter value and the real current value are not stored, so that the virtual servo motor has no feedback pulse.

(c) The feed current value of virtual servo motor is recorded in a backup memory, and it is restored at the switching from real mode to virtual mode after the power supply of the Multiple CPU system turned on.

1) When the output module is using the absolute position system, continuation operation is possible. However, if the servo motor of the output module connected to the virtual servo motor is operated while the power supply of the Multiple CPU system turns off, continuation operation is impossible even if the absolute position system is being used.
At this time, the virtual mode continuation operation disabled warning signal (Note-1) turns on.
Set the virtual servo motor or servo motor of output module to the position which synchronous operation is possible.

2) When the output module is not using the absolute position system, correct the feed current value of virtual servo motor by the current value change switching from real mode to virtual mode.

(5) Control change

The following control changes are possible for the virtual servo motor.

- Current value change
- Speed change
- Target position change QDS

Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details of the current value change, speed change or target position change.

REMARK

(Note-1): Refer to Section 4.1.5 (3) for details of the virtual mode continuation operation disabled warning signal.

(6) Error-time operation mode

The processing shown below applies when major errors occur with the output modules per 1 system.

The following control is executed based on the parameter settings (Refer to Section 6.1.2) of the virtual servo motor connected to the virtual main shaft.

(a) Continuation

Even if a major error occurs with the output module, the output module continues operation. At this time, the error detection signal (M2407+20n) turns on, and the applicable error code is stored in the major error code storage register.

Use the Motion SFC program for continue/stop of the system and the output module operation at the major error occurrence.

(b) Clutch OFF

If a major error occurs with the output module, the clutch within 1 system turns off and stops connected output modules. (The smoothing processing is executed by the clutch setting.)

At this time, the clutch ON/OFF command device does not turn off.

However, the clutch status storage device turns off regardless of the clutch ON/OFF command device's ON/OFF status.

Operation continues at axes where no clutch is connected.

Use the Motion SFC program to stop the drive module.

Eliminate the error cause, then turn the clutch ON/OFF command device off to on to resume the operation.

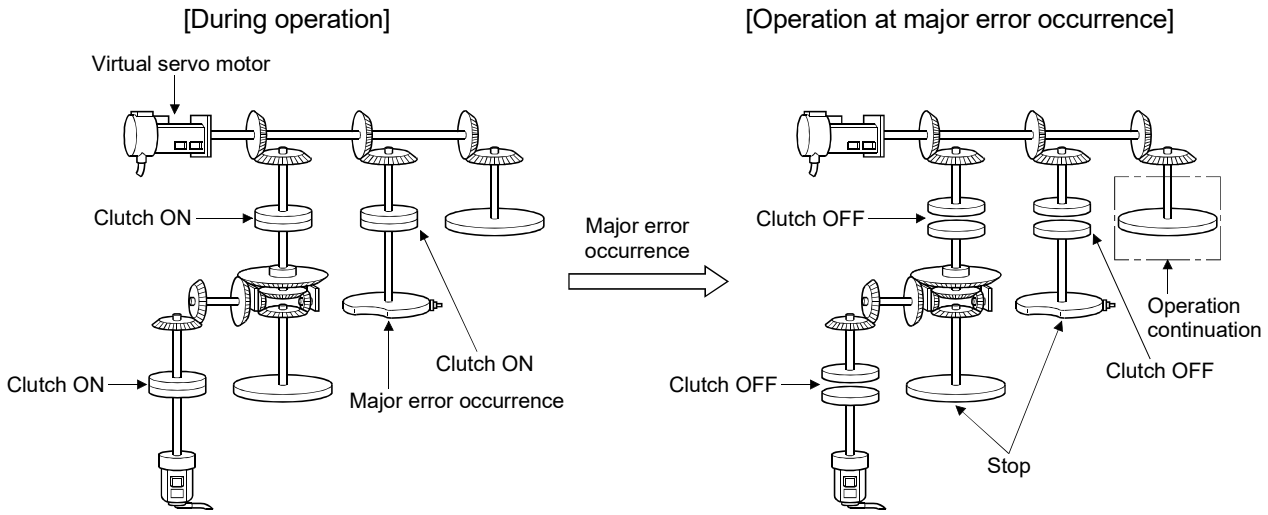

(7) Virtual servo motor axis infinite operation

By setting the upper stroke limit value and lower stroke limit value of the virtual servo motor parameters such that the "upper stroke limit value = lower stroke limit value", the stroke limit becomes invalid and infinite operation becomes possible.

When the stroke limit is invalid, it is also possible for the start of the feed current value to take place in a direction that exceeds 32 bits. In this case, the feed current value is converted to a 32 bits ring address.

-2147483648.....2147483647

The following operations are possible by the control mode.

Control mode	Control contents
Positioning (Linear)	• When the ABS command is used for the start, it starts in a direction within the 32 bits range. It does not start in a direction that exceeds the 32 bits range. • When the INC command is used for the start, it starts in the specified direction, so it also can be start in a direction that exceeds 32 bits.
Speed-switching	
Constant-speed (Linear)	
Fixed-pitch feed	• It starts in the specified direction, it also can be start in a direction that exceeds 32 bits.
Position follow-up	• The command address is controlled by the absolute method so it does not start in a direction that exceeds the 32 bits range.
Speed	• Stroke is invalid. (It is ignored.) Moves in the specified direction.
JOG	
Manual pulse generator (Test mode)	
Positioning (Circular, Helical)	• A start error (107, 108, 109) accompanies the ABS, ABH, INC or INH command and start is not possible.
Constant-speed (Circular, Helical)	

(8) Reverse return during positioning

By specifying a negative speed and making a speed change request by the CHGV instruction during the start, allow the axis start deceleration at that point and return in the opposite direction upon completion of deceleration.

Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details.

(9) Target position change QDS

Making a target position change request by the CHGP instruction during the start.

Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details.

6.1.2 Parameter list

The virtual servo motor parameters are shown in Table 6.1 and the parameters shown in this table are explained in items (1) to (4) below.
Refer to the help of MT Developer2 for the parameter setting method of virtual servo motor.
A parameter is requested except for the above for program operation of the virtual servo motor. Refer to the item (5) for precautions of the parameter blocks.

Table 6.1 Virtual Servo motor Parameter List

No.	Setting item		Default value		Setting range	
1	Virtual axis No.		—	—	Q173DSCPU/Q173DCPU(-S1): 1 to 32 Q172DSCPU : 1 to 16 Q172DCPU(-S1) : 1 to 8	—
2	Upper stroke limit value		2147483647	pulse	-2147483648 to 2147483647	pulse
3	Lower stroke limit value		0	pulse	-2147483648 to 2147483647	pulse
4	Command in-position range		100	pulse	Q173DSCPU/Q172DSCPU : 1 to 2147483647 Q173DCPU(-S1)/Q172DCPU(-S1) : 1 to 32767	pulse
5	JOG operation-time parameter	JOG speed restriction	20000	pulse/s	1 to 2147483647	pulse/s
6		Parameter block No.	1	—	1 to 64	—
7	Operation mode at error occurrence		Continuation	—	Continuation/Clutch OFF	

(1) Virtual axis No. setting

The virtual axis No. is set in the servo program at the virtual mode operation. The axis No. of the virtual servo motor connected to the virtual main shaft or virtual auxiliary input axis.

(2) Upper/lower stroke limit value settings

The stroke limit range of the virtual servo motor axis is set.

(a) When the stroke limit value is made valid:
Set the stroke range of the "Lower stroke limit value < upper stroke limit value".
The stroke limit check and control details at the start/during start are shown below.

Control mode		Error check (Note)				Remarks
		At start	During start			
		106	207	208	220	
Positioning	Linear	○	—	—	—	Start in the return direction in a stroke limit range from outside the stroke limit range is possible.
	Circular	○	○	○	—	
Fixed-pitch feed		○	—	—	—	
Speed-switching		○	○	○	—	
Constant-speed/Helical		○	○	○	—	
Position follow-up		○	○	—	○	
Speed		—	—	—	—	Stroke limit is invalid.
JOG		—	○	—	—	Start in the return direction in a stroke limit range from outside the stroke limit range is possible.
Manual pulse generator		—	○	○	—	

(Note): ○ Code detected at the error check.

<Error check at start>

Error code	Contents	Operation
106	Command position is outside the stroke limit range at start.	Operation does not start.

<Error check during start>

Error code	Contents	Operation
207	Feed current value is outside the stroke limit range during start.	Deceleration stop.
208	Feed current value of another axis is outside the stroke limit range at the circular interpolation start.	
220	Command address is outside the stroke limit range during position follow-up control.	

(b) When the stroke limit value is invalid.
Set the stroke range of the "Lower stroke limit value = upper stroke limit value".
When the stroke limit is invalid, feed current value startup in a direction that exceeds 32 bits is possible.
In such a case the feed current value is converted to a 32 bit ring address.

-2147483648.....2147483647

The following operations are possible by the control mode.

Control mode	Control contents
Positioning (Linear)	• When the ABS command is used at the start, it starts in a direction within the 32 bits range. It does not start in a direction that exceeds the 32 bits range. • When the INC command is used at the start, it starts in the specified direction, so it also can be start in a direction that exceeds 32 bits.
Speed-switching	
Constant-speed (Linear)	
Fixed-pitch feed	• It starts in the specified direction, it also can be start in a direction that exceeds 32 bits.
Position follow-up	• The command address is controlled by the absolute method so it does not start in a direction that exceeds the 32 bits range.
Speed	• Stroke is invalid. (It is ignored.) Travel in the specified direction.
JOG	
Manual pulse generator	
Positioning (Circular, Helical)	• A start error (107, 108, 109) occurs in the ABS, ABH, INC or INH command and start is not possible.
Constant-speed (Circular, Helical)	

(3) Command in-position range

The command in-position is the difference between the positioning address (command position) and feed current value.
Once the value for the command in-position has been set, the command in-position signal (M2403 + 20n) turns on when the difference between the command position and the feed current value enters the set range [(command position - feed current value) ≤ (command in-position range)].
The command in-position check is executed, continuously during position control. (The command in-position range is not checked during the speed control and JOG operation.)

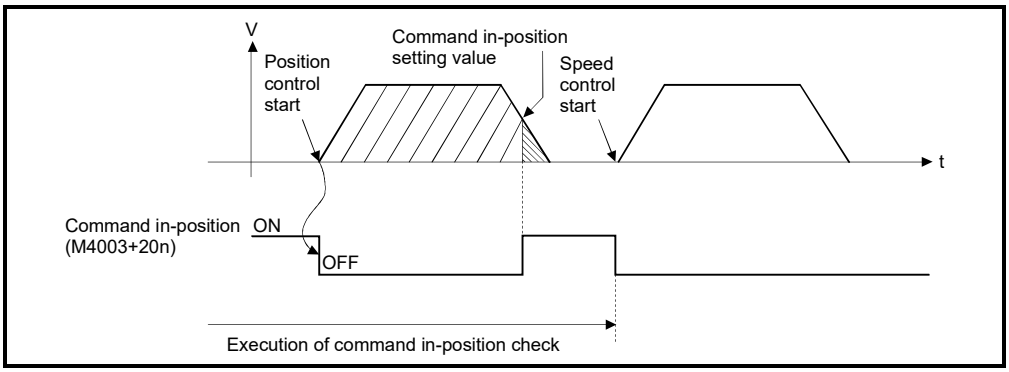

Fig. 6.1 Command in-position range

(4) Setting of the JOG speed restriction and parameter block No.

The JOG speed restriction and parameter block No. used in the JOG operation are shown below.

(a) JOG speed restriction
This is the maximum speed setting at the JOG operation for virtual axis.
If the JOG speed exceeds the JOG speed restriction, the JOG speed is controlled with the JOG speed restriction.

(b) Parameter block No. setting
This is the parameter block No. setting at the JOG operation.
The following parameter block data items are valid in the JOG operation.
• Acceleration time
• Deceleration time
• Rapid stop deceleration time

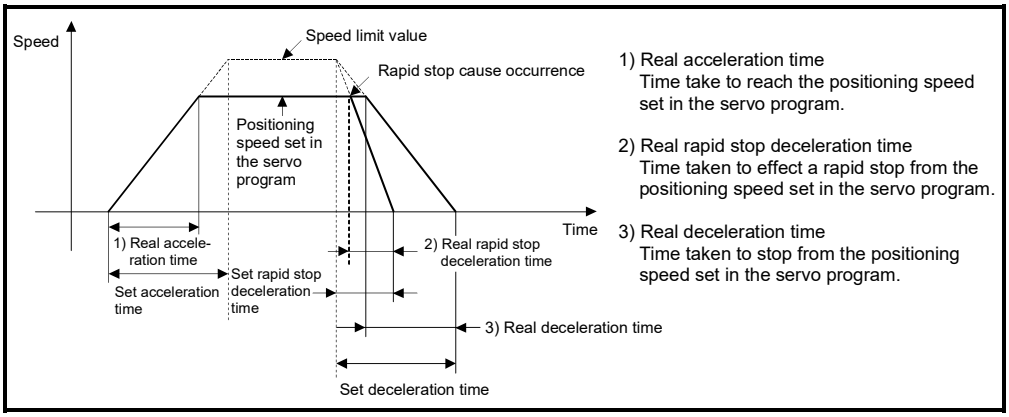

Fig. 6.2 Relationships between the JOG speed restriction, acceleration time, deceleration time and rapid stop time

POINT

(1) Unit is fixed at [pulse] regardless of the interpolation control unit setting of parameter block in the JOG operation.

(2) Even if the JOG speed of virtual servo motor is within the JOG speed restriction, when the JOG speed has not satisfied the condition "(Command speed [pulse/s]) × (Operation cycle [ms]) × (Number of input side gear teeth) < 2147483647 × 10^3", the speed of output module becomes abnormal. Be sure to use within the range of above conditional expression.

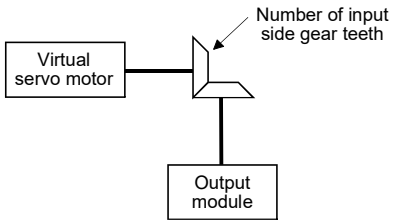

(Example) Relation between an operation cycle, number of input side gear teeth and maximum speed

Speed [Unit: pulse/s]

Operation cycle [ms]	Number of input side gear teeth		
	1	10000	65535
0.22 QDS	2147483647	900000000	137331200
0.44		450000000	68665600
0.88		225000000	34332800
1.77		112500000	17166400
3.55		56250000	8583200
7.11		28125000	4291600
14.2 QD		14062500	2145800

REMARK

Regardless of the speed limit value of parameter block for also program start of virtual servo motor, when the command speed has not satisfied the condition "(Command speed [pulse/s]) × (Operation cycle [ms]) × (Number of input side gear teeth) < 2147483647 × 10^3", the speed of output module becomes abnormal. Be sure to use within the range of above conditional expression.

(5) The parameter block No. for the program operation of virtual servo motor is set in the servo program for virtual mode. (If the parameter block No. setting is omitted, it is controlled with the contents of parameter block No.1.)

The valid parameter block data are shown below.

Item		Control unit
Interpolation control unit		[pulse] only (Note-1)
Speed limit value		[pulse/s] only (Note-1)
Acceleration time		○
Deceleration time		○
Rapid stop deceleration time		○
S-curve ratio		○
Advanced S-curve acceleration/ deceleration	Acceleration/deceleration system	○
	Acceleration section 1 ratio	○
	Acceleration section 2 ratio	○
	Deceleration section 1 ratio	○
	Deceleration section 2 ratio	○
Torque limit value		× (Note-2)
STOP input-time deceleration processing		×
Circular interpolation error permissible range		[pulse] only (Note-1)

○: Valid, × : Invalid

(Note-1): If it is set except for the [pulse] or [pulse/s], the program operation is executed as [pulse] automatically.
(Note-2): It is set for every output module with a parameter of output module.

<Example>

Item		Specified parameter block setting value	Value used for the program operation
Interpolation control unit		[mm]	[pulse]
Speed limit value		2000.00[mm/min]	200000[pulse/s]
Acceleration time		1000[ms]	1000[ms]
Deceleration time		1000[ms]	1000[ms]
Rapid stop deceleration time		1000[ms]	1000[ms]
S-curve ratio		0[%]	0[%]
Advanced S-curve acceleration/ deceleration	Acceleration/deceleration system	Trapezoid/S-curve	Trapezoid/S-curve
	Acceleration section 1 ratio	20.0[%]	20.0[%]
	Acceleration section 2 ratio	20.0[%]	20.0[%]
	Deceleration section 1 ratio	20.0[%]	20.0[%]
	Deceleration section 2 ratio	20.0[%]	20.0[%]
Torque limit value		300[%]	−
STOP input-time deceleration processing		Deceleration stop	−
Circular interpolation error permissible range		0.0100[mm]	100[pulse]

6.1.3 Virtual servo motor axis devices (Internal relays, data registers)

(1) Virtual servo motor axis status

Refer to Section 4.1.3 for details of the virtual servo motor axis statuses.

(2) Virtual servo motor axis command signal

Refer to Section 4.1.4 for details of the virtual servo motor axis command signals.

(3) Virtual servo motor axis monitor device

Refer to Section 4.2.3 for details of the virtual servo motor axis monitor devices.

(4) Current value after virtual servo motor axis main shaft's differential gear

Refer to Section 4.2.4 for details of the current value after virtual servo motor axis main shaft's differential gear.

6.2 Synchronous Encoder

The synchronous encoder is used to operate the virtual axis (virtual main shaft, virtual auxiliary input axis) with the external input pulse.
Synchronous encoder operation and parameters are shown below.

6.2.1 Operation description

(1) Operations

Although a synchronous encoder does not need to start using the servo program etc. in order to operate it by external devices, it needs cautions for the timing which begins to input the input pulse from a synchronous encoder.

(a) Operation start

The input timing of input pulse (Note-4) from an external synchronous encoder is shown below.

- At the switching from real mode to virtual mode
- At the external signal (Note-2) (TREN : Synchronous encoder input start signal) input

1) When the input pulse is started to input at the switching from real mode to virtual mode. (Note-4)

a) The input pulse is input from the external synchronous encoder at the switching from real mode to virtual mode.

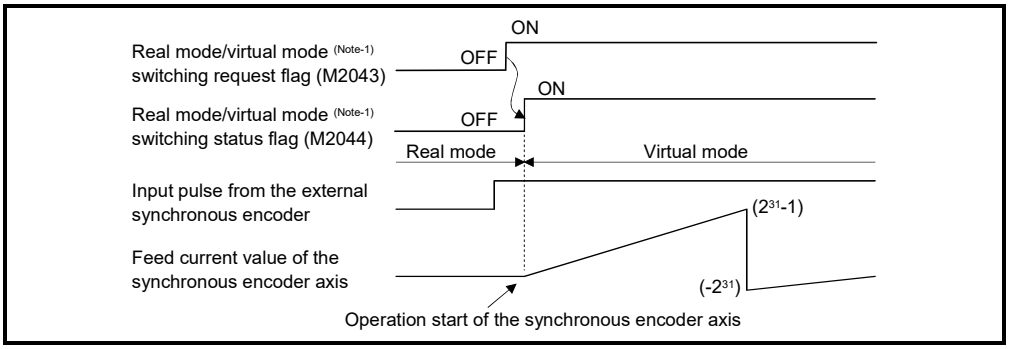

b) The control mode (Note-3) of a clutch is operation in the case of ON/OFF mode and address mode. It can be used with the synchronous encoder for the incremental/absolute data method.

c) Operating of the synchronous encoder axis starts when switched to the virtual mode by executing the switching request from real mode to virtual mode (M2043 OFF to ON). It depends on the state of connected clutch whether synchronous encoder operation in virtual mode is transmitted or not to the output module.

- Clutch ON ..... Transmit to the output module.
- Clutch OFF ..... Not transmit to the output module.

⚠CAUTION

● If the mode is switched from real mode to virtual mode in the state of clutch ON, use the smoothing clutch. If the direct clutch is used and the mode is switched from real mode to virtual mode in the state of clutch ON, the rapid acceleration occurs at the output module axis, causing a servo error, and the machine will be subjected to a jolt.

2) When the input pulse is inputted from an external synchronous encoder. (Note-4)

a) The input pulse is started to input from the external synchronous encoder, when the clutch is switched on in virtual mode.

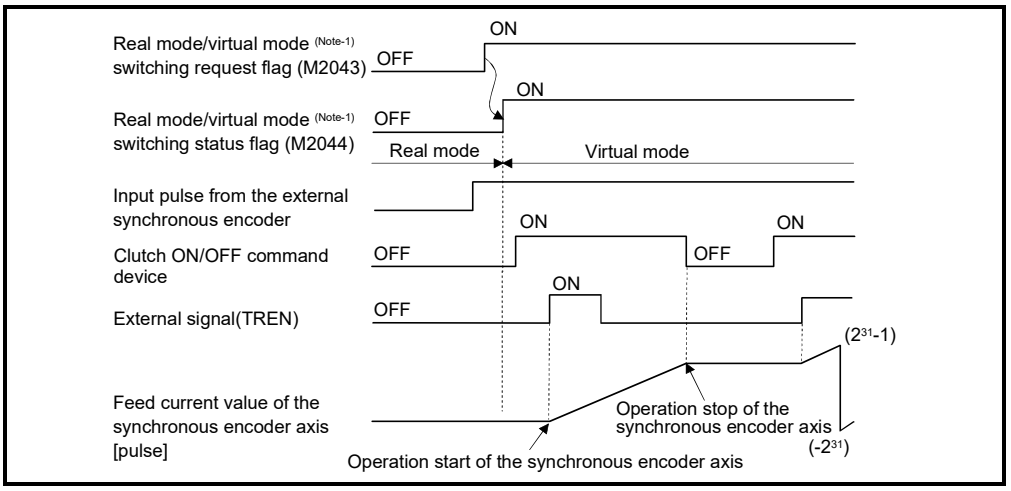

b) The control mode (Note-3) of a clutch is operation in the case of external input mode.
Operation of the synchronous encoder and clutch corresponds.
It can be used with the synchronous encoder for the incremental data method connected to Q173DPX only.

(b) Operation end

1) Operation of the synchronous encoder axis is executed the real mode/virtual mode switching request (M2043 : ON → OFF) and ends at the switching to real mode. (Note-4)

2) The procedure for ending operation of the synchronous encoder axis is shown below.

a) Stop the output module
- Stop the external synchronous encoder.
- Switch the connected clutch OFF.

b) Switch from the virtual mode to real mode.

⚠CAUTION

● If the mode is switched from virtual mode to real mode while the synchronous encoder axis and connected output module are operating, the rapid stop occurs at the output module axis, causing a servo error, and the machine will be subjected to a jolt.

(c) Stopping method

Stop the external synchronous encoder for stopping the external synchronous encoder.

There are no external inputs (FLS, RLS, STOP) or stop command/rapid stop command from the Motion SFC program for the synchronous encoder.

(d) Control items

1) The deviation counter value and the real current value are not stored, so that the synchronous encoder has no feedback pulse.
2) The current value of synchronous encoder is recorded in a backup memory, and it is restored at the switching from real mode to virtual mode after the power supply of the Multiple CPU system turned on.(Note-4)
   a) When the output module is using the absolute position system, continuation operation is possible. However, if the servo motor of the output module connected to the synchronous encoder or synchronous encoder for the absolute data method is operated by 180° or more while the power supply of the Multiple CPU system turns off, continuation operation is impossible even if the absolute position system is being used.
   At this time, the virtual mode continuation operation disabled warning signal turns on.
   Set the servo motor of output module to the position which synchronous operation is possible.
   b) When the output module is not using the absolute position system, correct the feed current value by the current value change switching from real mode to virtual mode.

(e) Control change

The following current value change is possible for the synchronous encoder.
Refer to Section 7.3 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details of the current value change.

REMARK

(Note-1): Refer to Section 4.1.7 (9) (10) for details of the real mode/virtual mode switching request flag and real mode/virtual mode switching status flag.
Refer to Chapter 9 for switching from real mode to virtual mode.

(Note-2): The synchronous encoder input start signal is inputted to the Q173DPX "TREN" terminal.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller User's Manual" for details of the Q173DPX "TREN" terminal.

(Note-3): Refer to Section 7.2.1 for details of the clutch control mode.

(Note-4): The input pulse is always input after Multiple CPU system's power supply ON in the real mode for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details.

(f) Error-time operation mode

The processings are shown below when major errors occurred with the output modules per 1 system.

The following control is executed based on the parameter settings (Refer to Table 6.2) of the synchronous encoder connected to the virtual main shaft.

1) Continuation

Even if a major error occurs with the output module, the output module continues operation. At this time, the error detection signal (M2407+20n) turns on, and the applicable error code is stored in the major error code storage register.

Use the Motion SFC program for continue/stop of the system and the output module operation at the major error occurrence.

2) Clutch OFF

If a major error occurs with the output module, the clutch within 1 system turns off and stops connected output modules.

At this time, the clutch ON/OFF command device does not turn off. However, the clutch status storage device turns off regardless of the clutch ON/OFF command device's ON/OFF status.

Operation continues at axes where no clutch is connected.

Use the Motion SFC program to stop the drive module.

Eliminate the error cause, then turn the clutch ON/OFF command device off to on to resume the operation.

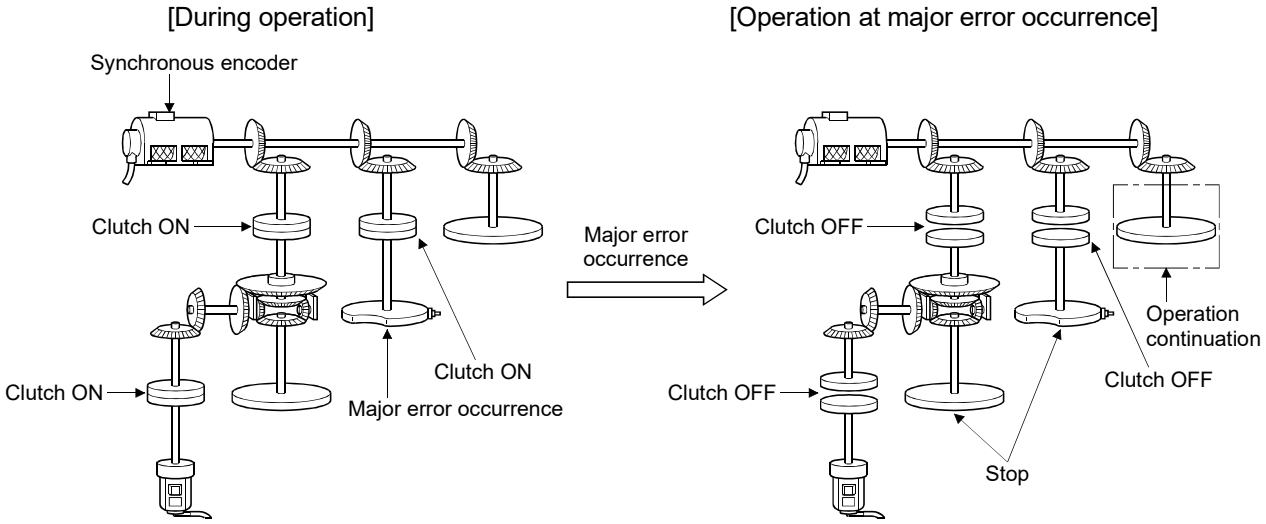

6.2.2 Parameter list

The synchronous encoder parameters are shown in Table 6.2 and the parameters shown in this table are explained in items (1) below.
Refer to the help of MT Developer2 for the parameter setting method of synchronous encoder.

Table 6.2 Synchronous Encoder Parameter List

No.	Setting item	Default value	Setting range
1	Synchronous encoder No.	—	Q173DSCPU/Q172DSCPU/Q173DCPU(-S1) : 1 to 12 Q172DCPU(-S1) : 1 to 8
2	Error-time operation mode	Continuation	Continuation/ Clutch OFF

(1) Synchronous encoder No.

The synchronous encoder No. is set connected to the Q172DEX/Q173DPX/built-in interface in Motion CPU (DI)[QDS].

Connecting position	Synchronous encoder No.
P1	1
P2	2
P3	3
P4	4
P5	5
P6	6
P7	7
P8	8
P9	9
P10	10
P11	11
P12	12

REMARK

(Note-1): The absolute and incremental synchronous encoders can be used (set) together.

6.2.3 Synchronous encoder axis devices (Internal relays, data registers)

(1) Synchronous encoder axis status

Refer to Section 4.1.5 for details of the synchronous encoder axis statuses.

(2) Synchronous encoder axis command signal

Refer to Section 4.1.6 for details of the synchronous encoder axis command signals.

(3) Synchronous encoder axis monitor device

Refer to Section 4.2.5 for details of the synchronous encoder axis monitor devices.

(4) Current value after synchronous encoder axis main shaft's differential gear

Refer to Section 4.2.6 for details of the current value after synchronous encoder axis main shaft’s differential gear.

6.3 Virtual Servo motor/Synchronous Encoder Control Change

The current value change and JOG speed change of the virtual servo motor and the current value of synchronous encoder.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details of the current value change/speed change/target position change.

6.3.1 Virtual servo motor control change

(1) Control change registers

Axis No.	Device No.	Signal name
1	D640, D641	
2	D642, D643	
3	D644, D645	
4	D646, D647	
5	D648, D649	
6	D650, D651	
7	D652, D653	
8	D654, D655	
9	D656, D657	
10	D658, D659	
11	D660, D661	
12	D662, D663	
13	D664, D665	
14	D666, D667	
15	D668, D669	
16	D670, D671	
17	D672, D673	
18	D674, D675	
19	D676, D677	
20	D678, D679	
21	D680, D681	
22	D682, D683	
23	D684, D685	
24	D686, D687	
25	D688, D689	
26	D690, D691	
27	D692, D693	
28	D694, D695	
29	D696, D697	
30	D698, D699	
31	D700, D701	
32	D702, D703	

\	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0 1	JOG speed setting	○	○		At start	Command device

○ : Valid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(a) JOG speed setting registers (D640+2n, D641+2n) .....Command device
1) This register stores the JOG speed at the JOG operation.
2) Setting range of the JOG speed is 1 to 2147483647 [pulse/s].
3) The JOG speed is the value stored in the JOG speed setting registers at leading edge of JOG start signal.
Even if data is changed during JOG operation, JOG speed cannot be changed.

(Note): Refer to Section 6.21 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of the JOG operation.

(2) Current value change

(a) Current value change by the CHGA instruction
Motion SFC program for which executes the servo program is shown below.
Current value change program of the virtual servo motor (When 1 axis feed current value of the virtual servo motor is changed to 1000 pulse.)

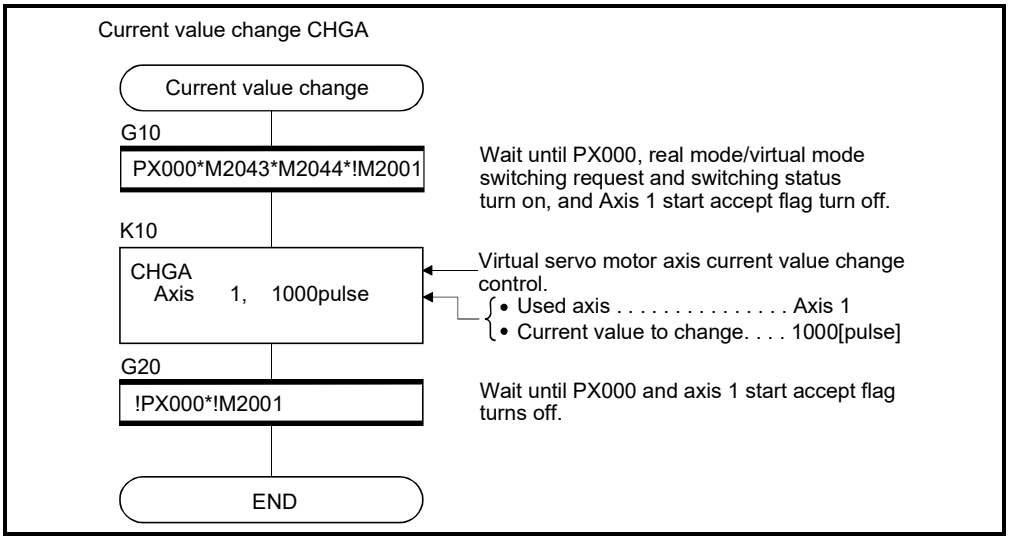

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

6.3.2 Synchronous encoder control change

(1) Current value change by the CHGA-E instruction

Example of Motion SFC program for which executes the servo program is shown below.

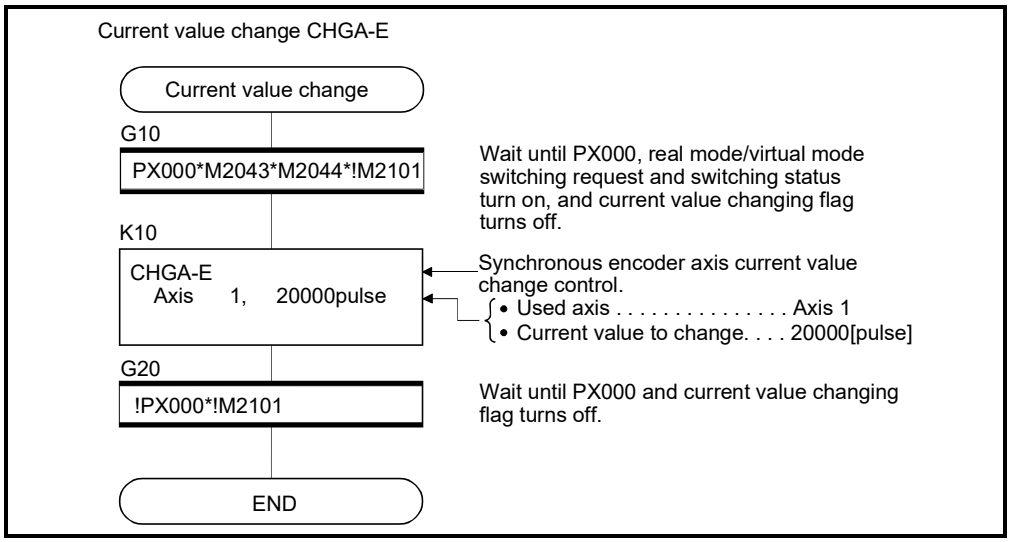

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

(a) The current value to change uses the following devices.

- Indirect setting..... Data register (D)
  Link register (W)
  Motion register (#)
  Multiple CPU area device (U□\G)
  } 2 word
- Direct setting ..... Decimal constant (K)

(b) Precautions

- When the synchronous encoder current value is changed in the real mode, an error occurs and the current value change is not executed. (Note-1)
- The synchronous encoder current value change can be executed even during operation in the virtual mode operation (during pulse input from the synchronous encoder). (Note-1)
  When the current value is changed, the synchronous encoder current value will be continued from the changed value.
- Even if a synchronous encoder current value is changed, it will have no effect on the output module current value.

(Note-1): The current value change can be executed in real mode for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

7. TRANSMISSION MODULE

The transmission module transmits the pulse outputted from the drive module to output module.
The following 4 types of transmission modules are available.

- Gear ..... Section 7.1
- Clutch ..... Section 7.2
- Speed change gear ..... Section 7.3
- Differential gear ..... Section 7.4

The device range and setting procedure for indirect setting in the parameter setting of the transmission module are show below.

(1) Device range

The number of device words and device range at the indirect setting are shown below.

<table>
<tr><th>Module</th><th>Item</th><th>Number of device words</th><th>Device setting range</th><th>Remark</th></tr>
<tr><td rowspan="10">Clutch</td><td>Clutch ON/OFF command device</td><td rowspan="3">Bit</td><td rowspan="3"><table><tr><th>Device</th><th>Range</th></tr><tr><td>X</td><td>0000 to 1FFF (Note-1)</td></tr><tr><td>Y</td><td>0000 to 1FFF</td></tr><tr><td>M</td><td>0 to 8191</td></tr><tr><td>B</td><td>0000 to 1FFF</td></tr><tr><td>F</td><td>0 to 2047</td></tr><tr><td>U□\G</td><td>10000.0 to (10000+p-1).F (Note-2)</td></tr></table></td><td rowspan="3"></td></tr>
<tr><td>Smoothing clutch complete signal</td></tr>
<tr><td>Clutch status</td></tr>
<tr><td>Mode setting device</td><td>1</td><td rowspan="8"><table><tr><th>Device</th><th>Range</th></tr><tr><td>D</td><td>0 to 8191</td></tr><tr><td>W</td><td>0000 to 1FFF</td></tr><tr><td>#</td><td>0 to 7999</td></tr><tr><td>U□\G</td><td>10000 to (10000+p-1) (Note-2)</td></tr></table></td><td rowspan="8"></td></tr>
<tr><td>Clutch ON address setting device</td><td>2</td></tr>
<tr><td>Clutch OFF address setting device</td><td>2</td></tr>
<tr><td>Slippage setting device</td><td>2</td></tr>
<tr><td>Slippage in-position range setting device</td><td>2</td></tr>
<tr><td rowspan="2">Gear</td><td>Input axis side tooth count</td><td>1</td></tr>
<tr><td>Output axis side tooth count</td><td>1</td></tr>
<tr><td>Speed change gear</td><td>Speed change ratio setting device</td><td>1</td></tr>
</table>

(Note-1): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

POINT

(1) Be sure to set even-numbered devices of the items set as 2-word.
Be sure to set as 32-bit integer type when the data is set in these devices using the Motion SFC programs.
(2) When a 2-word monitor device is read in the Motion SFC program, read it as 32-bit integer type.
(3) Refer to Chapter 2 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for the user setting area points of the Multiple CPU high speed transmission area.

(2) Device data input

The all device data set indirectly is inputted as "initial value" at the switching from real mode to virtual mode, thereafter the input control for module is executed during the virtual mode operation.

The input timing of each setting device and refresh cycle of setting device are shown below.

Module	Item	Input device	Refresh device	Device input timing		Refresh cycle
				Real mode/ Virtual mode switching	During the virtual mode operation	
Clutch	Clutch ON/OFF command device	○	—	○	Input for every operation cycle. (Note)	—
	Smoothing clutch complete signal	—	○	—	—	Operation cycle (Note)
	Clutch status	—	○	—	—	
	Mode setting device	○	—	○	Input for every operation cycle. (Note)	—
	Clutch ON address setting device	○	—	○		
	Clutch OFF address setting device	○	—	○		
	Slippage setting device	○	—	○	Input when switching mode setting device.	
	Slippage in-position range setting device	○	—	○	Input for every operation cycle. (Note)	
Gear	Input axis side tooth count	○	—	○	Input when the current value change of the connection source drive module (virtual servo motor axis/synchronous encoder axis) is executed and the gear ratio is changed.	
	Output axis side tooth count	○	—	○		
Speed change gear	Speed change ratio setting device	○	—	○	Input for every operation cycle. (Note)	

REMARK

(Note): The operation cycle is set in the "operation cycle setting" of system basic setting.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for details of setting contents.

7.1 Gear

This section describes the gear operation and the parameters required to use a gear.

7.1.1 Operation

Relation between the number of pulses outputted from the synchronous encoder or virtual servo motor and the output module is adjusted by parameter setting of the encoder resolution of servo motor, the gear ratio in consideration of the deceleration ratio for machine system etc. and rotation direction.
The gear operation is shown below.

(1) The gear transmits the number of pulses which applied the gear ratio set in the gear parameter to the travel value (number of pulses) of drive module (virtual servo motor, synchronous encoder) to the output axis.

$$\begin{pmatrix}\text{Number of output}\\ \text{axis pulses}\end{pmatrix} = \begin{pmatrix}\text{Number of input}\\ \text{axis pulses}\end{pmatrix} \times [\text{Gear ratio}] \quad [\text{pulse}]$$

(2) The rotation direction of output axis is set in the gear parameters.

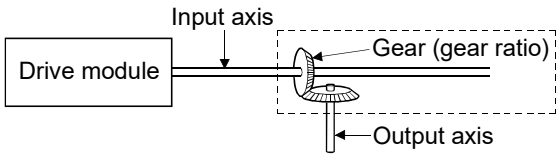

REMARK

Refer to Section 7.1.2 for details of the gear parameters.

7.1.2 Parameters

The gear parameters are shown in Table 7.1 and the parameters shown in this table are explained in items (1) to (2) below.
Refer to the help of MT Developer2 for the gear parameter setting method.

Table 7.1 Gear Parameter List

No.	Setting Item		Default	Setting range	
				Direct setting	Indirect setting
1	Gear ratio	Input axis side tooth count (GI)	1	1 to 65535	D0 to D8191 (Note-1)
					W0 to W1FFF
		Output axis side tooth count (GO)			#0 to #7999
					U□\G10000 to U□\G(10000+p-1)(Note-2)
2	Rotation direction of output axis		Forward rotation	Forward rotation Reverse rotation	—

(Note-1): D800 to D1559 are dedicated devices of the virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(1) Gear ratio

(a) The number of pulses transmitted to the output axis through 1 pulse outputted from the drive module by the gear module is set in the gear ratio.

(b) The gear ratio is based on the settings for the input axis side tooth count (GI) and output axis side tooth count (GO).

$$\text{Gear ratio} = \frac{\text{Input axis side tooth count (GI)}}{\text{Output axis side tooth count (GO)}}$$

(2) Rotation direction of output axis

(a) The rotation direction of the output axis forward the rotation direction of the input axis is set.

(b) There are two types for rotation directions of the output axis: forward and reverse.

1) Forward

When the input axis rotates to the address increase direction, the output axis also rotates to the address increase direction.

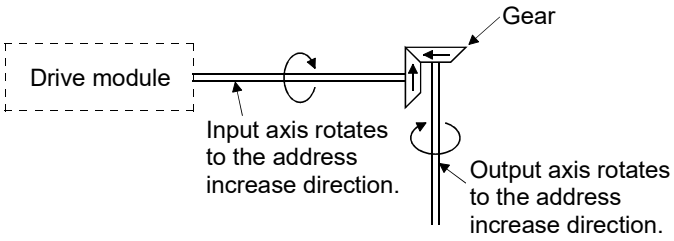

2) Reverse

When the input axis rotates to the address increase direction, the output axis rotates to the address decrease direction.

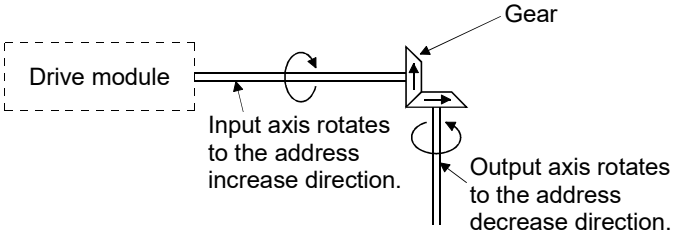

POINT

If the gear ratio is set indirectly, the timing that the gear ratio set in Motion SFC program becomes valid is shown below.

(1) When the real mode is switched to virtual mode.

(2) When the current value of the drive module is changed in the virtual mode.

7.2 Clutch

The clutch is used to transmit/disengage the command pulse from drive module side to output module side, and to control the operation/stop of servo motor.
There are two types for clutch: smoothing clutch and direct clutch.
These two clutches operate in the same way, but these have the difference in whether the acceleration/deceleration processing by the smoothing processing is executed or not at the switching of the clutch on/off.

(1) Smoothing clutch and direct clutch

(a) Smoothing clutch

When the clutch is switched on/off, output to the output axis with the acceleration/deceleration processing (smoothing processing) set in the clutch parameters.

There are following three systems for smoothing clutch.

1) Time constant system
2) Slippage system
   • Exponential function system • Linear acceleration/deceleration system

(b) Direct clutch

When the clutch is switched on/off, output to the output axis without the acceleration/deceleration processing.

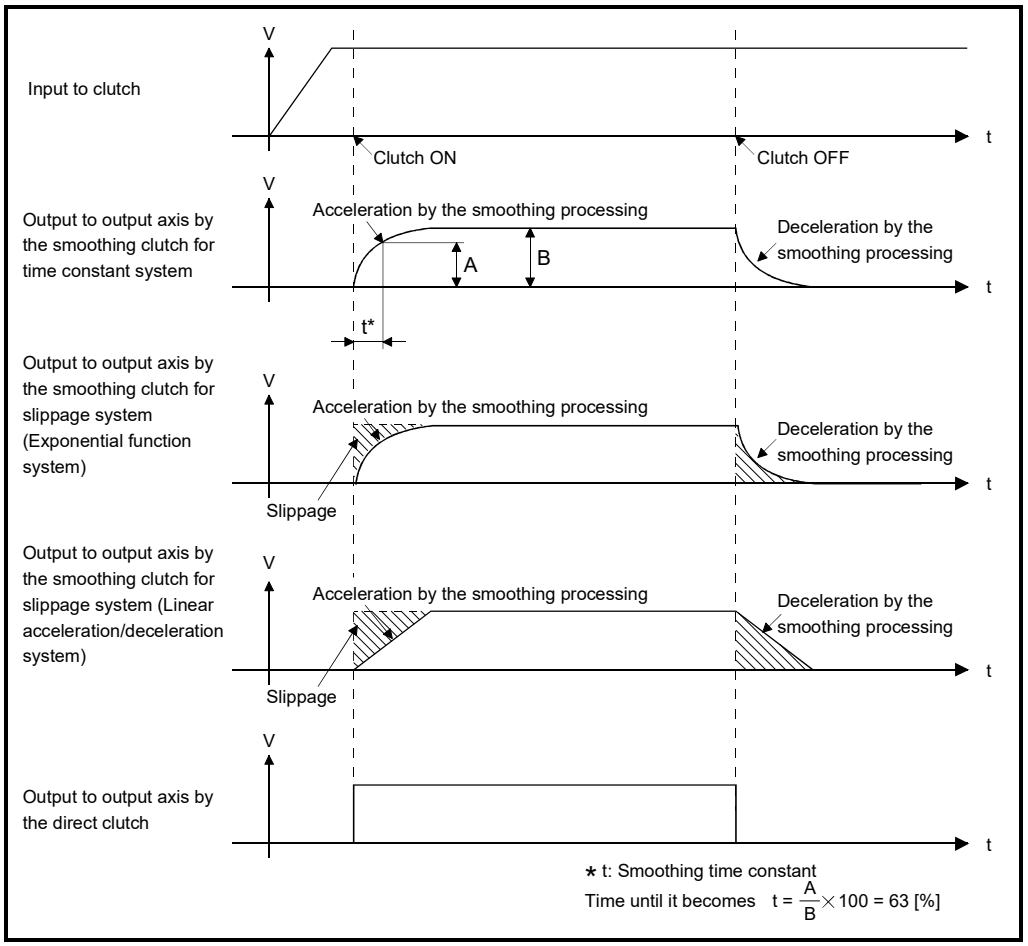

Fig. 7.1 Output to the Output axis by the Smoothing and Direct Clutch

REMARK

(1) Clutch ON/OFF state is shown below.

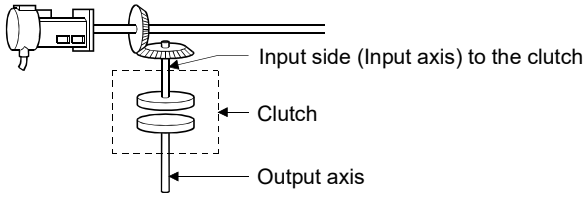

• Clutch ON state.....The state in which pulses inputted to the clutch are output to the output axis.

• Clutch OFF state.....The state in which pulses inputted to the clutch are not output to the output axis.

(2) Smoothing processing

(a) Time constant system

1) Since the time constant is fixed, the slippage of clutch changes according to the speed of drive module.

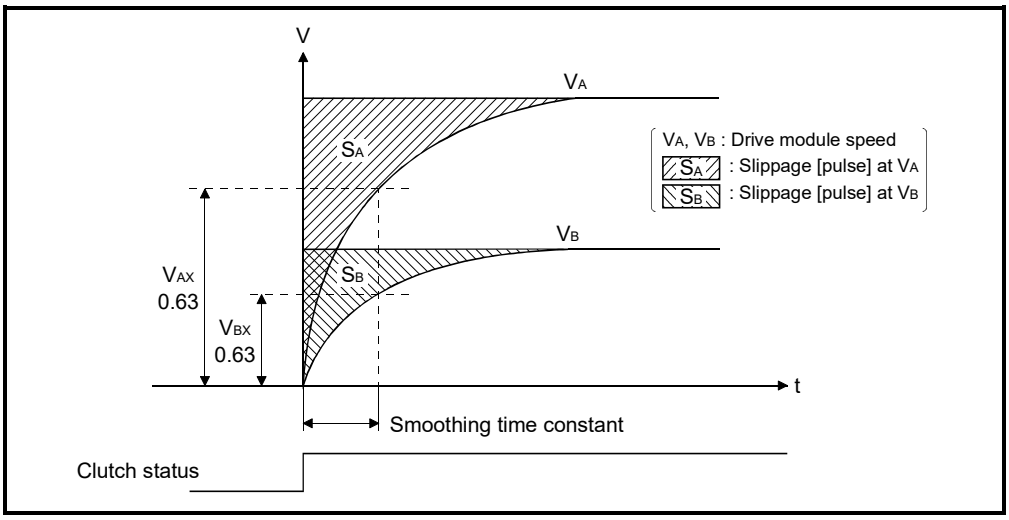

2) If input to clutch (travel value after the main shaft's differential gear) changes after smoothing completion, the smoothing processing is executed at that point.

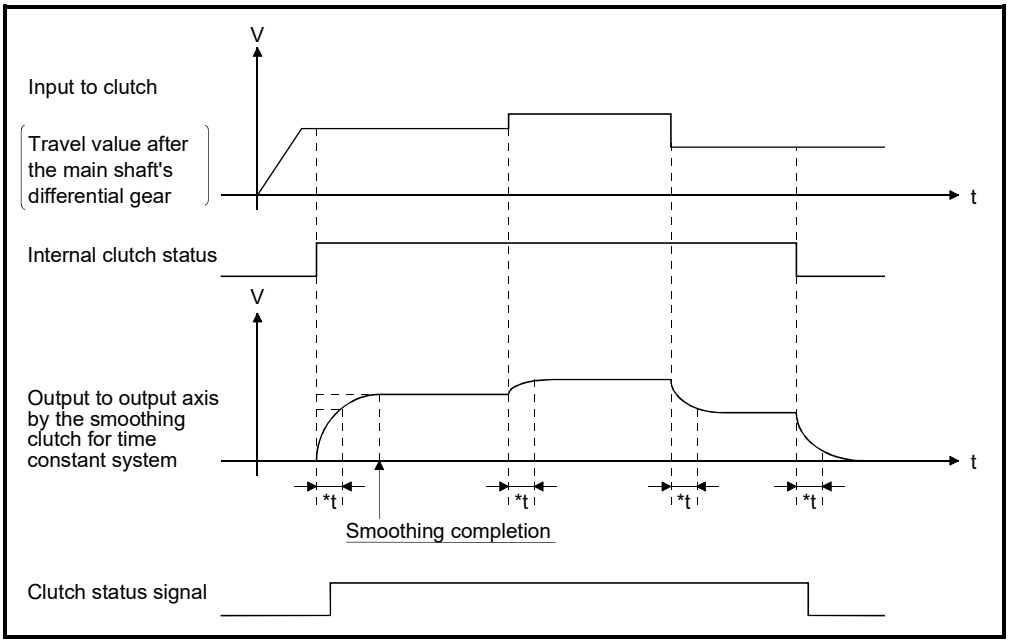

*t : Smoothing time constant

(b) Slippage system

There are following two systems for slippage system.

- Exponential function system
- Linear acceleration/deceleration system

1) Exponential function system

a) Set the slippage indicated by the shaded area in the diagram below. Slippage is recommended to be set greater than input to clutch (travel value after the main shaft's differential gear).

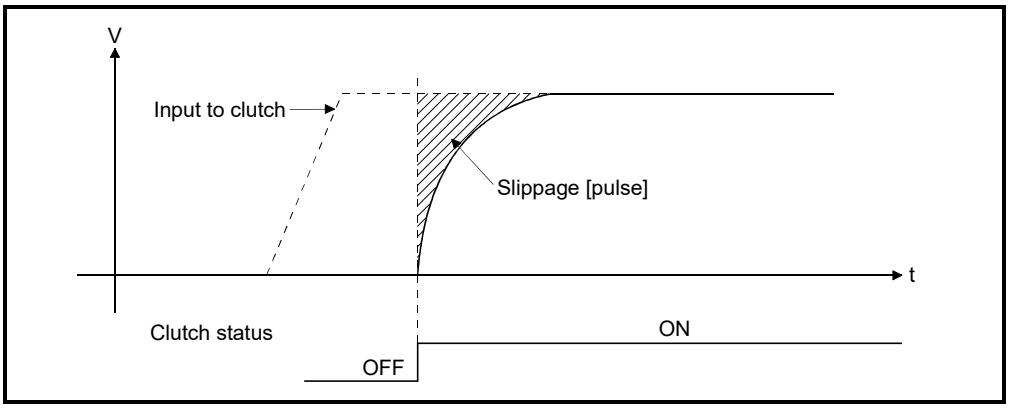

b) Since the slippage remains constant even if the drive module speed changes, the clutch ON/OFF position can be controlled without any influence from speed changes.

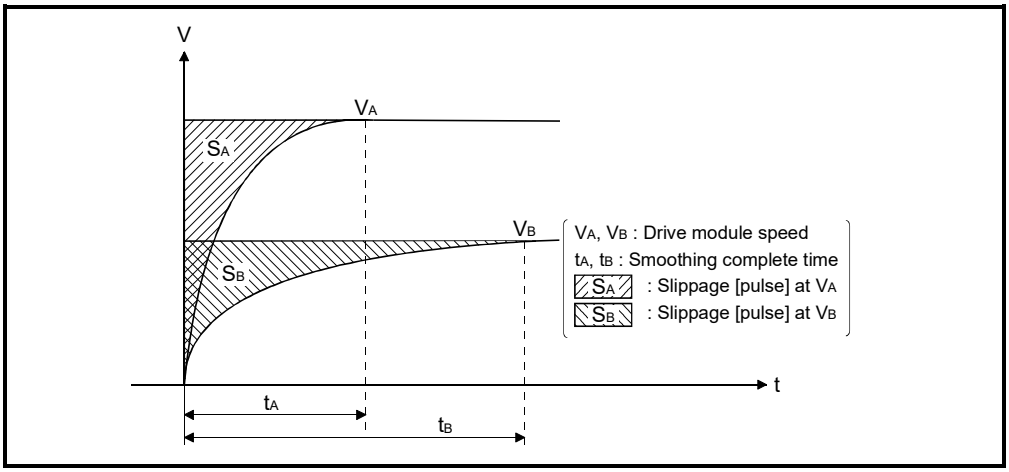

c) If input to clutch (travel value after the main shaft's differential gear) changes after smoothing completion, the smoothing processing is not executed at that point and output directly.

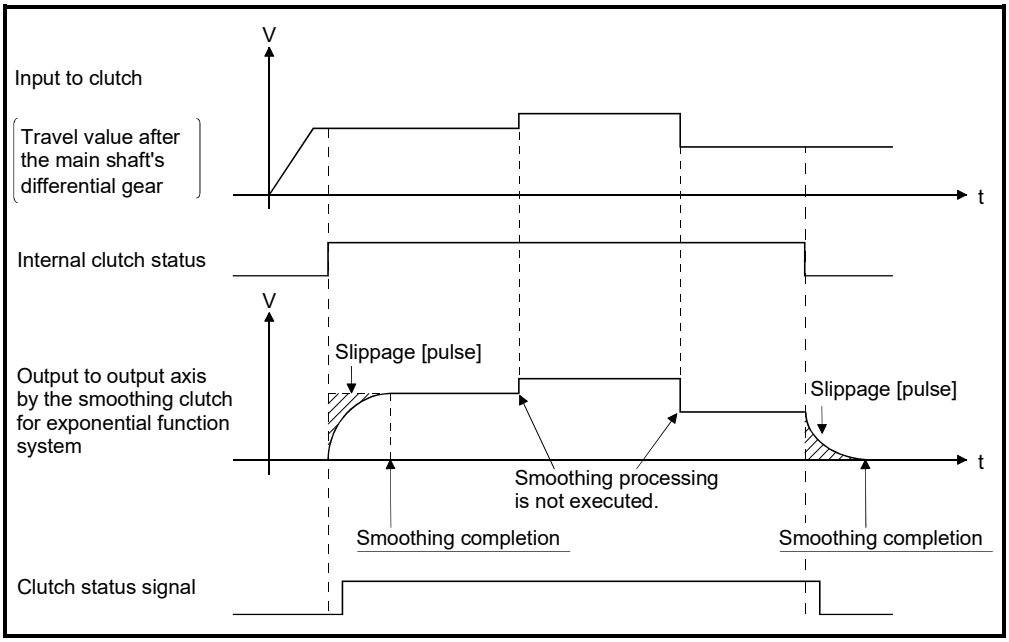

d) The smoothing clutch complete signal turns ON after completion of smoothing processing.
- ON …."(Remainder slippage) < (Slippage in-position range)"
- OFF… Smoothing processing start (Clutch ON/OFF)

The smoothing clutch complete signal is used to check the completion of smoothing processing, etc.

2) Linear acceleration/deceleration system

a) Set the slippage indicated by the shaded area in the diagram below. Slippage is recommended to be set greater than input to clutch (travel value after the main shaft's differential gear).

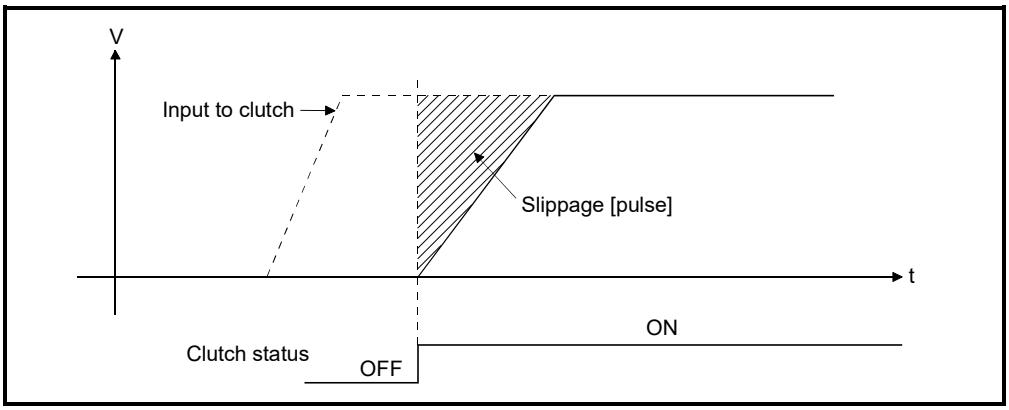

b) Execute the smoothing processing so that the slippage may become the shaded area by the linear acceleration/deceleration system at clutch ON/OFF.

c) Since the slippage remains constant even if the drive module speed changes, the clutch ON/OFF position can be controlled without any influence from speed changes.

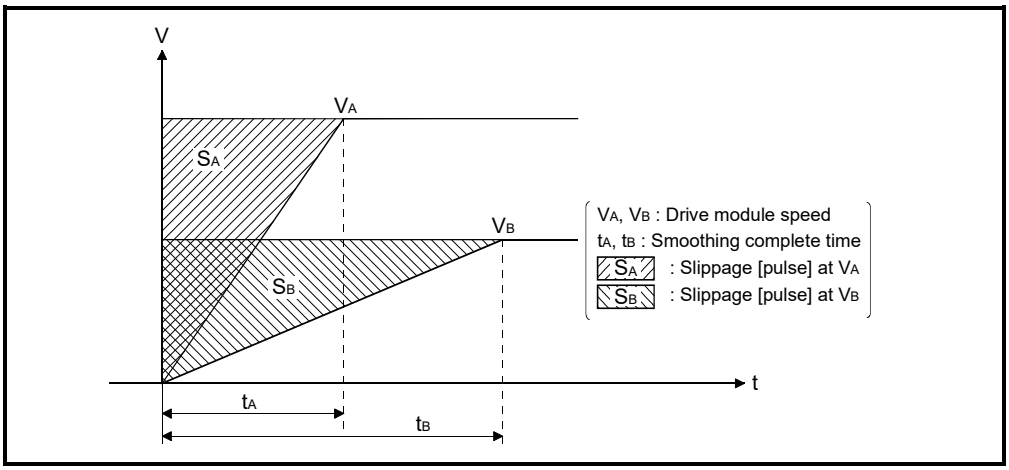

d) If input to clutch (travel value after the main shaft's differential gear) changes after smoothing completion, the smoothing processing is not executed and output directly.

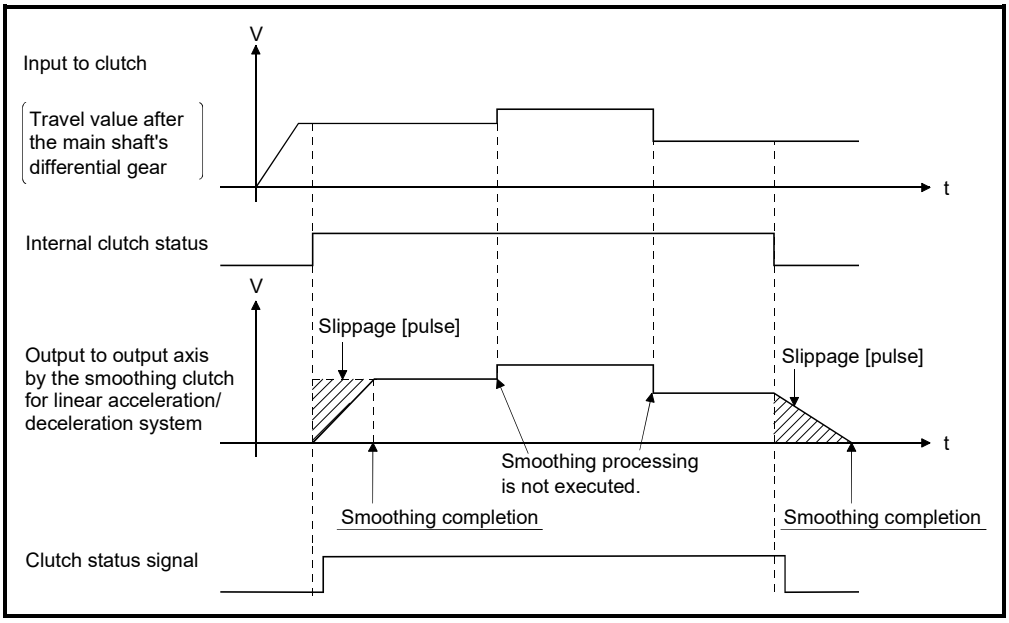

e) The smoothing clutch complete signal turns ON after completion of smoothing processing.
- ON …."(Remainder slippage) < (Slippage in-position range)"
- OFF… Smoothing processing start (Clutch ON/OFF)

The smoothing clutch complete signal is used to check the completion of smoothing processing, etc.

7.2.1 Operation

There are following five clutch operation modes.

Operation mode	Description
ON/OFF mode	Clutch ON/OFF control is executed by turning the clutch ON/OFF command device on/off.
Address mode	Clutch ON/OFF control is executed by turning the clutch ON/OFF command device on/off and an address of clutch ON/OFF address setting device.
Address mode 2	After clutch ON/OFF command device turns on, Clutch ON/OFF control by an address of clutch ON/OFF address setting device.
One-shot mode	Clutch ON/OFF control is executed based on the drive module current value, setting travel value before clutch ON and setting travel value after clutch ON after the clutch ON/OFF command device from off to on.
External input mode	Only axis that the incremental synchronous encoder (manual pulse generator) is set as drive module can be set. Clutch ON/OFF control is executed by turning the clutch ON/OFF command device on/off and an external input (TREN signal: Synchronous encoder start signal).

Operations for every clutch mode are shown below.

(1) ON/OFF mode

(a) The clutch ON/OFF control is executed by turning the clutch ON/OFF command device on/off.

Conditions	Clutch operation
Clutch ON/OFF command device: ON	ON
Clutch ON/OFF command device: OFF	OFF

(b) It takes a time for maximum operation cycle until a clutch will be in the ON/OFF state after turning the clutch ON/OFF command device on/off. If greater accuracy is required, use the "address mode".

POINT

(1) The mode setting device of except "0 to 4" is regarded as an error, and it controls continuously at the previous setting value.
(2) Clutch operation mode can be changed at any time.

(c) The clutch ON/OFF state can be checked by the clutch status signal.

(d) The refresh cycle of clutch status signal is an operation cycle.

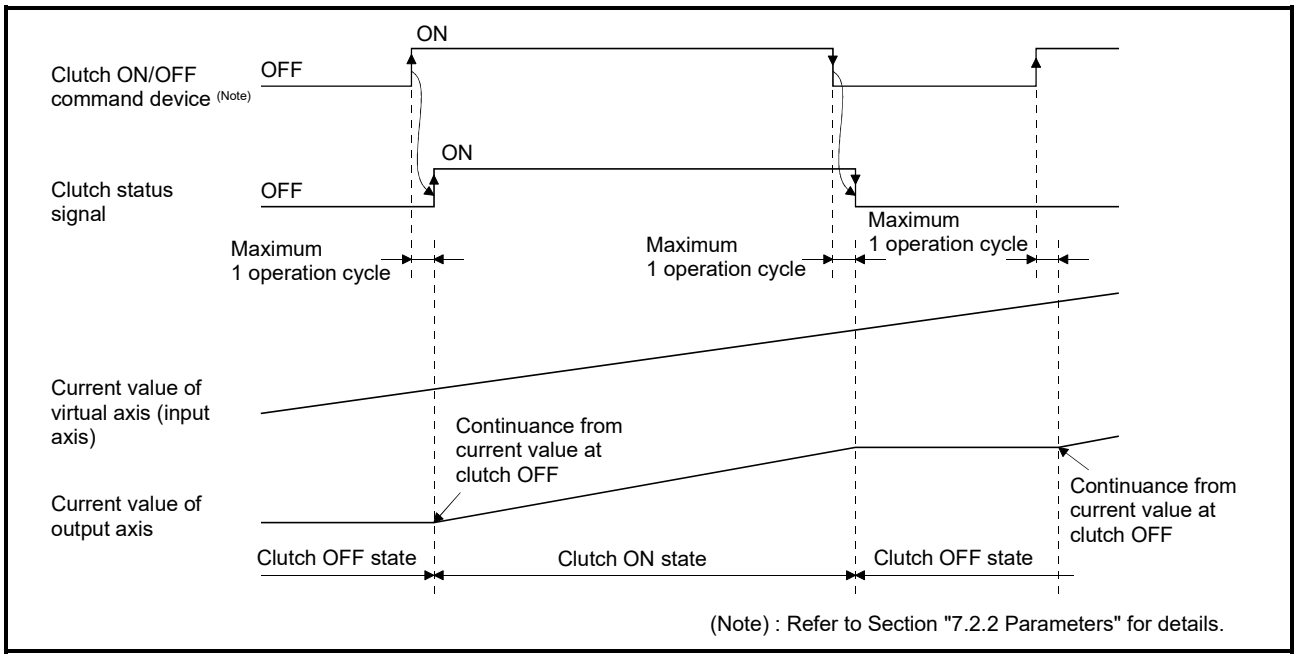

Fig. 7.2 Operation Timing for ON/OFF Mode

(2) Address mode

(a) When the current value of virtual axis reaches an address of clutch ON/OFF address setting device, the clutch ON/OFF is executed. (Mode setting device is "1".)

1) When the clutch ON/OFF command device is ON and the current value of virtual axis reaches an address set in the clutch ON address setting device, the clutch is set to the ON state.

2) When the clutch ON/OFF command device is OFF and the current value of virtual axis reaches an address set in the clutch OFF address setting device, the clutch is set to the OFF state.

(b) The clutch ON/OFF control differs according to the output module connected as follows.

1) For a ball screw or roller

The ON/OFF control is executed by the current value of virtual axis. When a differential gear is connected to the main shaft, the ON/OFF control is executed by the current value after the main shaft's differential gear.

2) For a rotary table or cam

The ON/OFF control can be executed by setting the current value of virtual axis or current value within 1 virtual axis revolution.
(Refer to a rotary table or cam of output module for details.)

(c) Turn the clutch ON/OFF command device on/off after setting an address of clutch ON/OFF address setting device.

1) When the clutch ON/OFF command device is OFF, even if the current value of virtual axis reaches an address of clutch ON address setting device, the clutch is not set to the ON state.

2) When the clutch ON/OFF command device is ON, even if the current value of virtual axis reaches an address of clutch OFF address setting device, the clutch is not set to the OFF state.

(d) The clutch ON/OFF state can be checked by clutch status signal.

(e) The refresh cycle of clutch status signal is an operation cycle.

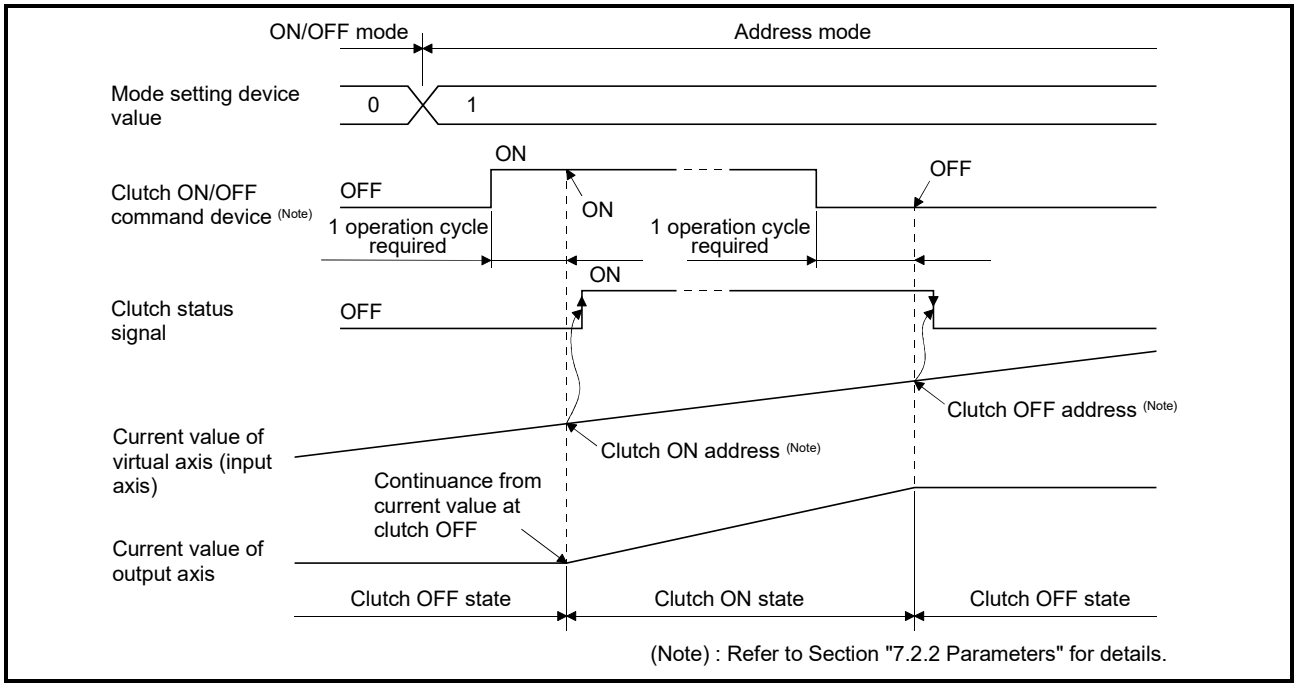

Fig. 7.3 Operation Timing for Address Mode

POINT

(1) The mode setting device of except for "0 to 4" is regarded as an error, and control is continued at the previous setting value.

(2) Clutch operation mode changes are valid at any time.

(3) Clutch ON/OFF address setting device changes are valid at any time. Since they have 2-word data, set it as 32-bit integer type data.

(3) Address mode 2

(a) When the current value of virtual axis reaches an address of clutch ON/OFF address setting device, the clutch ON/OFF is executed. (Mode setting device is "2".)

(b) When the clutch ON/OFF command device is ON, the following controls are executed according to the current clutch status.

1) When the current clutch status is OFF.
When the current value of virtual axis reaches an address set in the clutch ON address setting device, the clutch is set to the ON state. After that, it is set the state in 2).

2) When the current clutch status is ON.
When the current value of virtual axis reaches an address set in the clutch OFF address setting device, the clutch is set to the OFF state. After that, it is set the state in 1).

(c) When the clutch ON/OFF command device is OFF, the clutch is turned off and the above control (b) is not executed. Therefore, the above control is resumed by turning the clutch ON/OFF command device on.

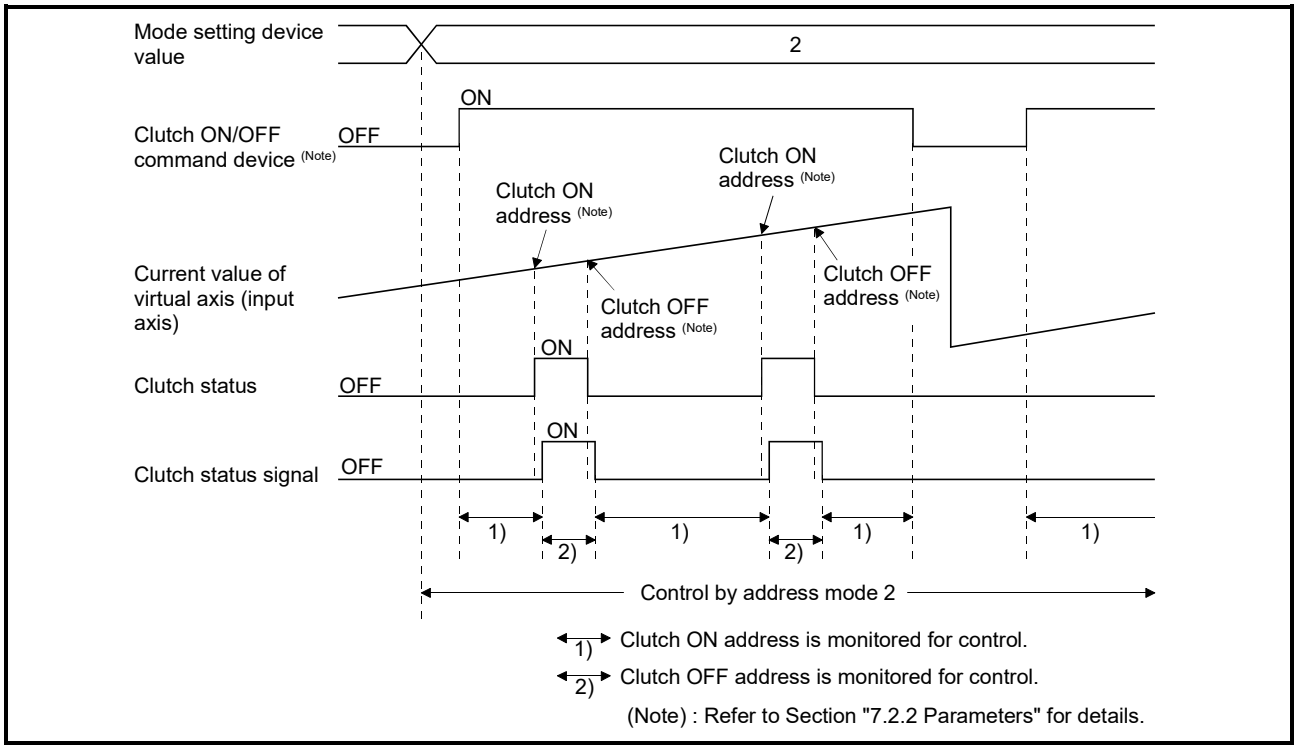

Fig. 7.4 Operation Timing for Address Mode 2

POINT

(1) The mode setting device of except for "0 to 4" is regarded as an error, and control is continued at the previous setting value.
(2) Clutch control mode changes are valid at any time.
(3) Clutch ON/OFF address setting device changes are valid at any time. Since they have 2-word data, set it as 32-bit integer type data.

(d) The clutch ON/OFF control is executed for every operation cycle. When the current value passes through an address set in the clutch ON/OFF address setting device for 1 operation cycle, the internal control is executed correctly but the clutch status signal does not change.

1) When the clutch status signal is OFF and the current value passes through an address set in the clutch ON/OFF address setting device.

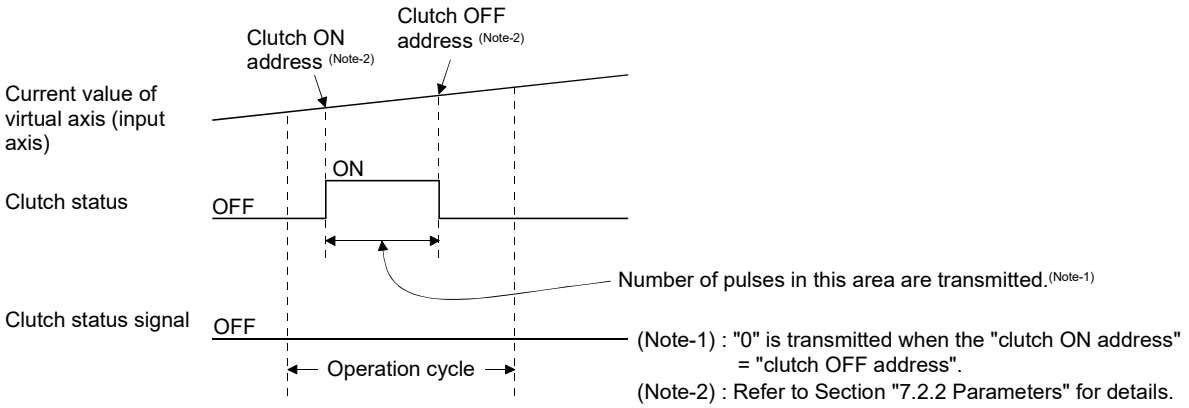

2) When the clutch status signal is ON and the current value passes through an address set in the clutch ON/OFF address setting device.

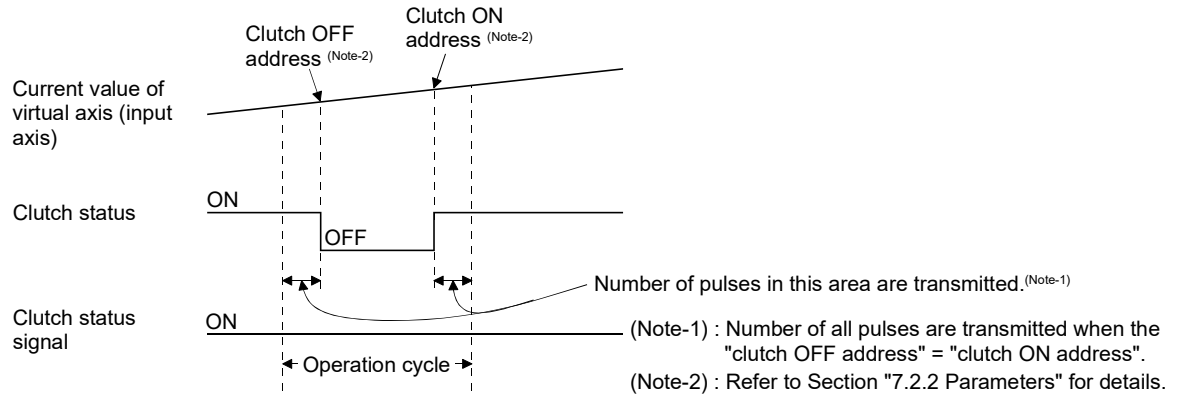

(e) When the "Clutch OFF" is set in the parameter "Error-time operation mode" of drive module and a major error occurs in the output module, the operating system software turns off the clutch.
The procedure to resume an operation after an error occurrence is shown below.

1) Remove a major error factor.
2) Turn the clutch ON/OFF command device off.
→ It returns to normal state.
3) Turn the clutch ON/OFF command device on.
→ The clutch ON address is monitored and control is resumed.

(f) The procedure to execute the axis servo OFF or power supply OFF of servo amplifier during operation is shown below.
1) Turn the clutch ON/OFF command device off.
→ The clutch status is set to the OFF state. After that, the axis servo OFF command becomes valid.
2) Execute the axis servo OFF command or the power supply OFF of servo amplifier.

(g) The procedure to resume an operation after the axis servo OFF or power supply OFF of servo amplifier during operation is shown below.
1) Turn the power supply of servo amplifier on.
2) Execute the axis servo ON command.
3) Turn the clutch ON/OFF command device on.
→ The clutch ON address is monitored and control is resumed.

(4) One-shot mode

(a) When the mode setting device is "3: One-shot mode clutch ON command is valid" or "4: One-shot mode clutch ON command is invalid", it switches to one-shot mode control.

(b) When the mode setting device is "3", the clutch ON/OFF command device becomes valid, and the following controls are executed based on the clutch ON address setting device (setting travel value after clutch ON)/clutch OFF address setting device (setting travel value before clutch ON) by the clutch ON/OFF command device.
1) When the clutch ON/OFF command device switches from OFF to ON. The clutch is set to the ON state after moving the travel value set in the setting travel value before clutch ON, and it is set to the OFF state after moving the travel value set in the setting travel value after clutch ON.
2) When the clutch ON/OFF command device switches from ON to OFF. It has no influence on the clutch processing. The clutch state is held.

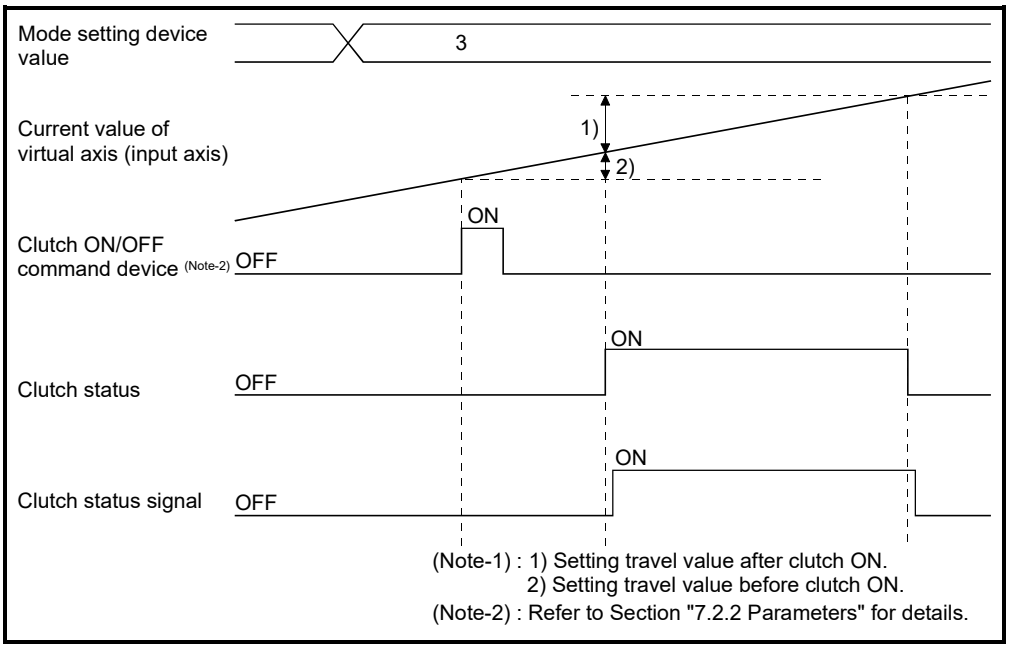

Fig. 7.5 Operation Timing for One-shot Mode

(c) When the mode setting device is "4", the clutch ON/OFF command device becomes invalid, and the clutch remains OFF. However, when the mode setting device is changed from "3" to "4" during execution of clutch ON/OFF processing by turning the clutch ON/OFF command device on, the clutch ON/OFF processing in execution is executed till the end and the next clutch ON/OFF command or later becomes invalid.
The clutch ON/OFF command device becomes valid by changing the mode setting device value to "3" again.

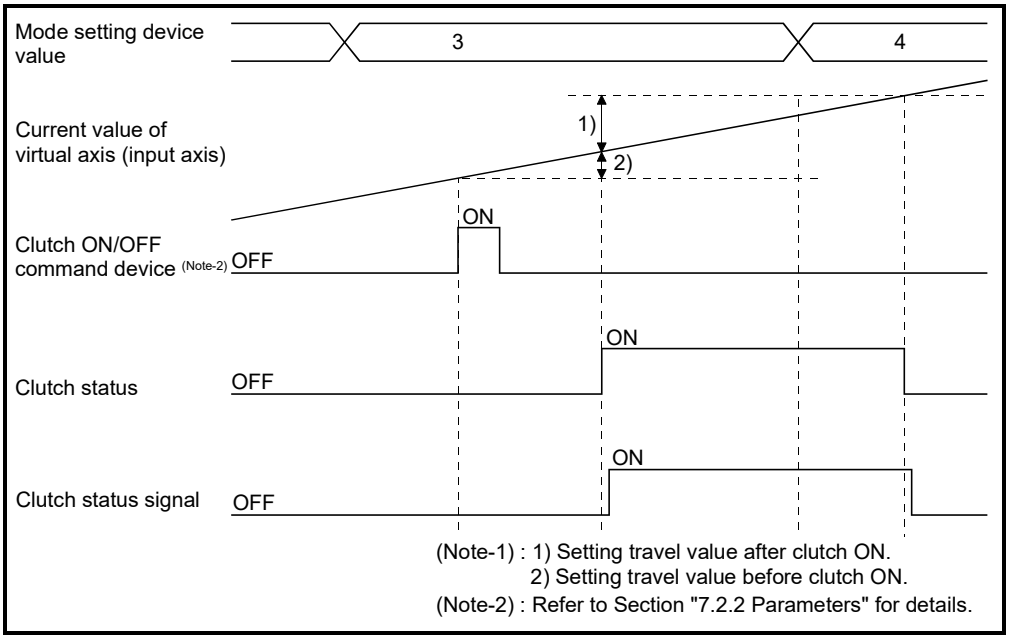

(d) The details for setting items are shown below.

Setting items	Description
Clutch ON/OFF command device	The clutch ON/OFF processing of one-shot mode starts at leading edge of this device.
Clutch ON address setting device	The transmitted travel value (setting travel value after clutch ON) of connected drive module from turning on clutch to turning off is set. A positive travel value is stored to indicate a positive direction travel value from the point of clutch ON, and a negative value to indicate a negative travel direction travel value. (Setting range: -2147483648 (-2^{31}) to 2147483647 (2^{31}-1) [pulse])
Clutch OFF address setting device	The travel value (setting travel value before clutch ON) of connected drive module from turning on clutch ON/OFF command device to turning on the clutch actually is set. A positive travel value is stored to indicate a positive direction travel value from the point of clutch ON, and a negative value to indicate a negative travel direction travel value. (Setting range: -2147483648 (-2^{31}) to 2147483647 (2^{31}-1) [pulse])

(Note) : When the setting travel value before clutch ON is "0", the clutch also becomes ON state simultaneously by turning the clutch ON/OFF command device off to on.

POINT

(1) The mode setting device of except for "0 to 4" is regarded as an error, and control is continued at the previous setting value.
(2) Clutch control mode changes are valid at any time.
(3) Clutch ON/OFF address setting device changes are valid at any time. Since they have 2-word data, set it as 32-bit integer type data.

(e) The clutch ON/OFF control is executed for every operation cycle. The internal control is executed correctly but the clutch status signal does not change for the setting travel value that the clutch status turns from off to on to off for 1 operation cycle.

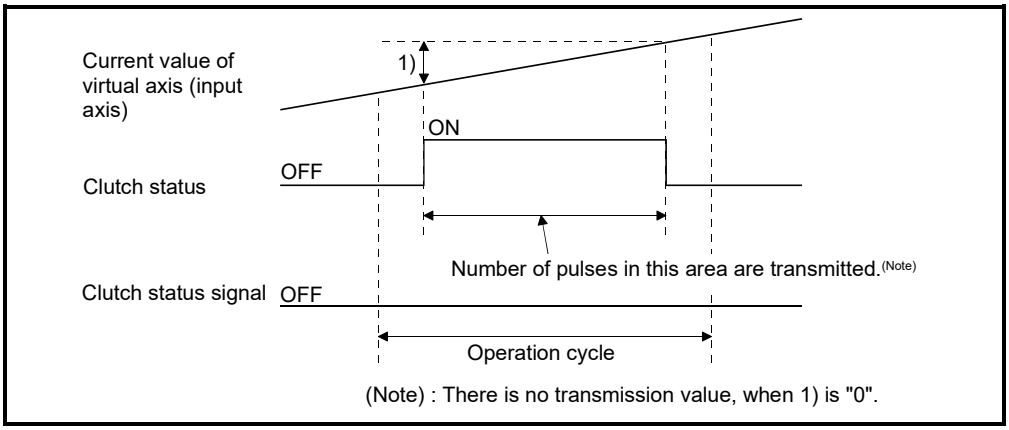

(Note) : There is no transmission value, when 1) is "0".

(f) When the mode setting device becomes "3", the clutch ON/OFF control starts based on the setting data while the clutch ON/OFF command device is ON.

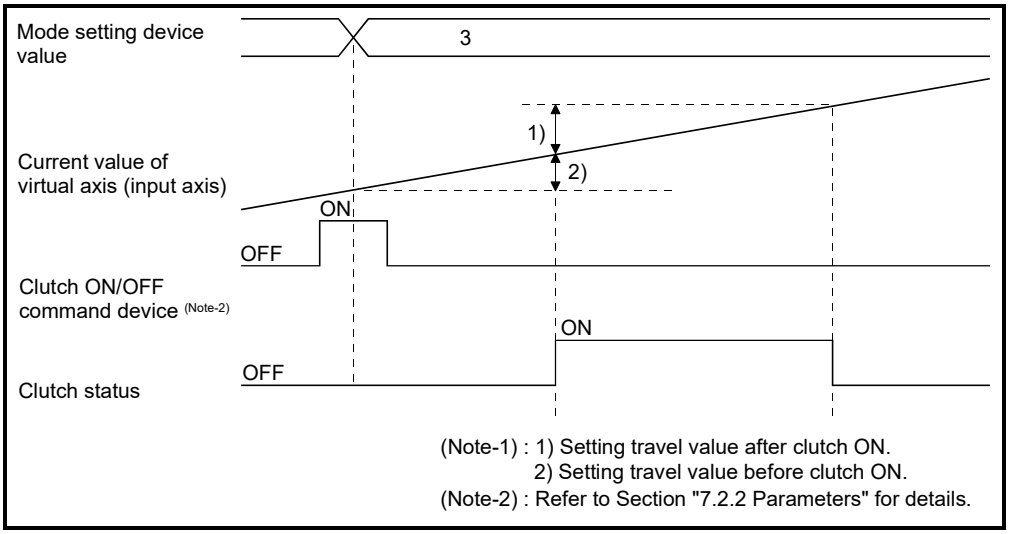

(Note-1) : 1) Setting travel value after clutch ON.
2) Setting travel value before clutch ON.
(Note-2) : Refer to Section "7.2.2 Parameters" for details.

(g) When the mode setting device becomes "3", the clutch status turns OFF, while the clutch ON/OFF command device is OFF and the clutch status is ON.

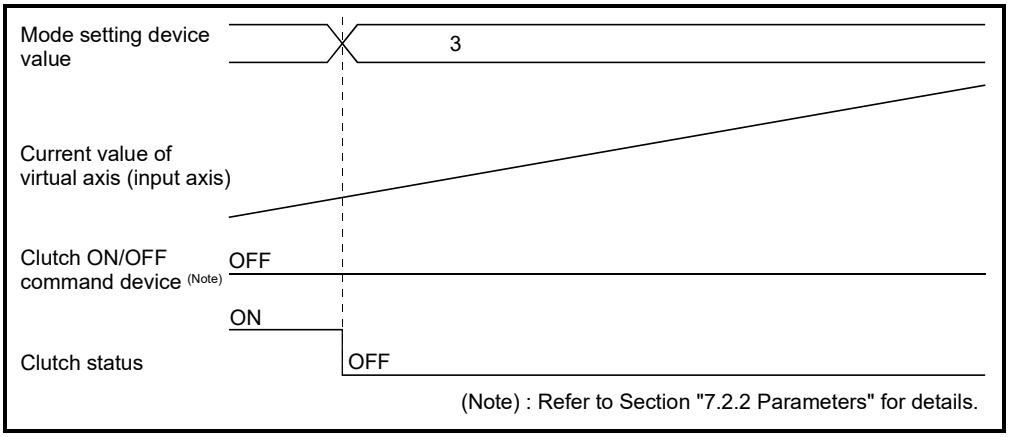

(h) When the mode setting device is changed from "except 3" to "4", the clutch status turns off regardless of the clutch ON/OFF command device.

(i) When the clutch ON/OFF address setting device data is changed during the clutch processing of one-shot mode, it becomes valid by turning the next clutch ON/OFF command device off to on.

(j) When the drive module stops during the clutch ON/OFF processing by turning the clutch ON/OFF command device on, or if the clutch ON/OFF command device is turned on though the drive module stops, the one-shot mode clutch does not end until the travel value condition set to the setting travel value before clutch ON or setting travel value after clutch ON is satisfied.

(k) When the current value change is made to the drive module during the clutch ON/OFF processing by turning the clutch ON/OFF command device on, the clutch turns off at the position where the setting travel value before clutch ON or setting travel value after clutch ON from the clutch ON position is satisfied.

(l) When the travel direction of drive module changes during the clutch ON/OFF processing by turning the clutch ON/OFF command device on, the clutch ON/OFF control is executed at the position in which not the travel value of drive module but the setting travel value before clutch ON/ setting travel value after clutch ON to the position where the clutch ON command is given was added.

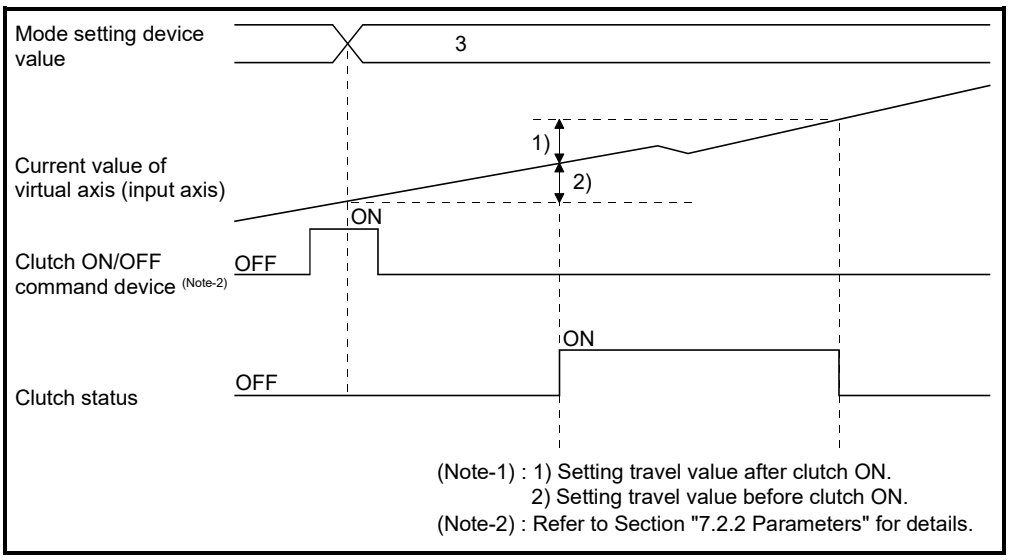

(m) The setting travel value before clutch ON/setting travel value after clutch ON differs according to the output module connected as follows.

1) For a ball screw or roller

The clutch ON/OFF control is executed by the current travel value of virtual axis connected.

When a differential gear is connected to the main shaft, the clutch ON/OFF control is executed by the current travel value after the main shaft's differential gear.

2) For a rotary table or cam

The clutch ON/OFF control is executed by the travel value of current value within 1 virtual axis revolution. The setting travel value can be set outside the range of current value within 1 virtual axis revolution.

(n) When the travel direction set in the setting travel value before clutch ON/ setting travel value after clutch ON does not match the virtual axis or current value within 1 virtual axis revolution, note that the clutch will turn on/off even if the condition is not satisfied when the data found by subtracting the travel value from the specified travel value comes out of the range -2147483648 to 2147483647 [pulse] and changes from "+" to "-" or from "-" to "+".

(o) When the "Clutch OFF" is set in the parameter "Error-time operation mode" of drive module and a major error occurs in the output module, the operating system software turns off the clutch.
The procedure to resume an operation after an error occurrence is shown below.
1) Remove a major error factor.
2) Turn the clutch ON/OFF command device off.
→ It returns to normal state.
3) Turn the clutch ON/OFF command device on.
→ The clutch control of one-shot mode is resumed.

(p) The procedure to execute the axis servo ON/OFF or power supply OFF of servo amplifier during operation is shown below.
1) Turn the clutch revolution OFF command device off, when the clutch status is ON state, wait until the clutch status becomes OFF.
→ After the clutch status to be set to OFF state, the axis servo OFF command becomes valid.
2) Execute the axis servo OFF command or the power supply OFF of servo amplifier off.

(q) The procedure to resume an operation after the axis servo OFF or the power supply OFF of servo amplifier during operation is shown below.
1) Turn the power supply of servo amplifier on.
2) Execute the axis servo ON command.
3) Turn the clutch ON/OFF command device on.
→ The clutch control of one-shot mode is resumed.

(5) External input mode

(a) The clutch ON/OFF control is executed by turning the clutch ON/OFF command device on/off and external input (TREN signal: Synchronous encoder start signal).
Since the input pulses from synchronous encoder are counted at leading edge of external input, a high-speed response and high accuracy clutch control is possible.
1) The clutch is set to the ON state at leading edge of external input (OFF → ON) after the clutch ON/OFF command device turns on.
2) When the clutch ON/OFF command device turns off, the clutch is set to the OFF state after maximum 2 operation cycles.

(b) Turn the external input (TREN signal) on after turning the clutch ON/OFF command device on.
In this mode, a time for maximum 2 operation cycles is required to turn the external input on after the clutch ON/OFF command device turns on.
1) If the external input turns from off to on when the clutch ON/OFF command device is OFF, the clutch is not set to the ON state.
2) If the clutch ON/OFF device turns on when the external input is ON, the clutch is not set to the ON state.
3) If the external input turns off after the clutch is set to the ON state, the clutch state remain ON.

(c) The clutch status signal ON/OFF is refreshed by the operation cycle.

(d) The current value of input axis (synchronous encoder) changes at the clutch ON state only.

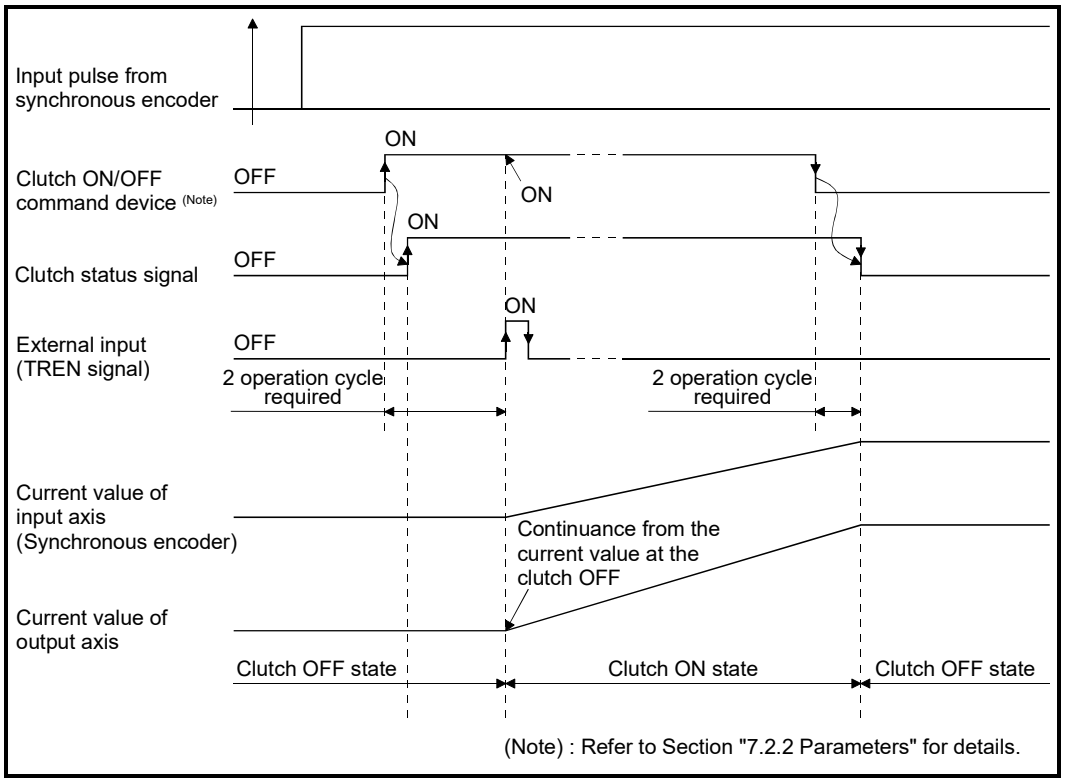

Fig. 7.6 Operation Timing for External Input Mode

(e) Only axis that the incremental synchronous encoder (manual pulse generator) is set as drive module can be used in this mode. When an absolute synchronous encoder is set as the drive module, it cannot be used.

(f) A synchronous encoder, external input and external input mode clutch can be set in only 1:1 ratio.
The relationship between the synchronous encoder and external input is shown in the table below.

Synchronous encoder No.	External input (TREN signal)	Synchronous encoder No.	External input (TREN signal)
P1	TREN 1	P7	TREN 7
P2	TREN 2	P8	TREN 8
P3	TREN 3	P9	TREN 9
P4	TREN 4	P10	TREN 10
P5	TREN 5	P11	TREN 11
P6	TREN 6	P12	TREN 12

(Note): The range of synchronous encoder No. P1 to P8 is valid in the Q172DCPU(-S1).

(g) Set all clutches connected to the same encoder No. to the external input mode to use the clutch connected to an encoder in the external input mode. However, it is permissible to use a combination of direct clutches and smoothing clutches.

< Example 1 > **Synchronous encoder is connected to a drive axis**

When an external input mode clutch is used, set all clutches connected to the synchronous encoder to the external input mode. (Also set clutch ON/OFF devices to the same setting.)

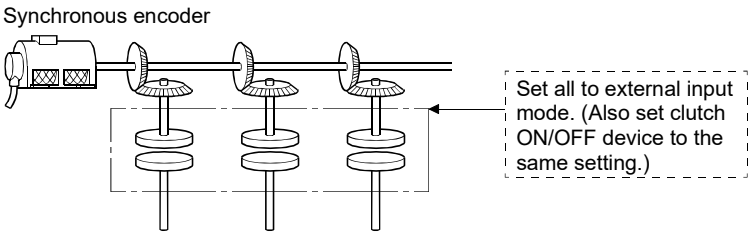

< Example 2 > **Same synchronous encoder is connected to auxiliary input axis**

Set all the clutches connected to the same synchronous encoder set to the external input mode. (Also set clutch ON/OFF devices to the same setting.)

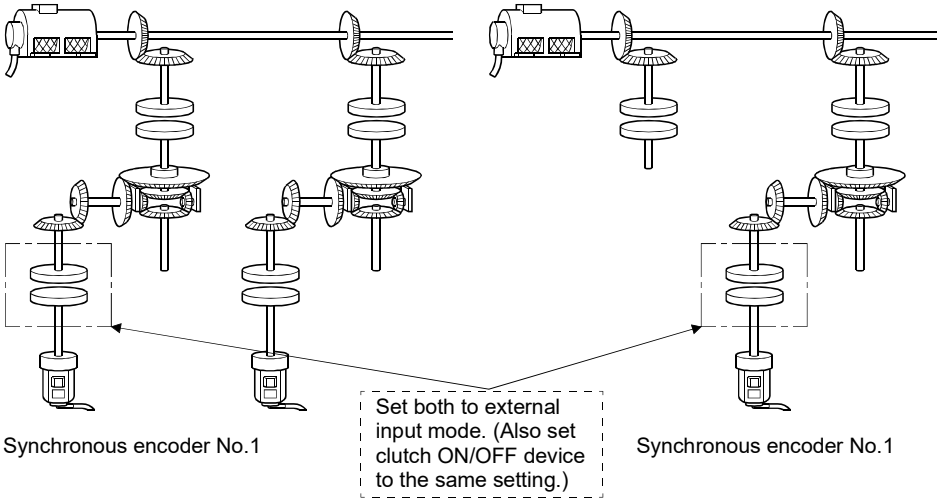

< Example 3 > **Same synchronous encoder is connected to a drive axis and auxiliary input axis**

Set all the connected clutches to the external input mode. (Refer to examples 1 and 2)

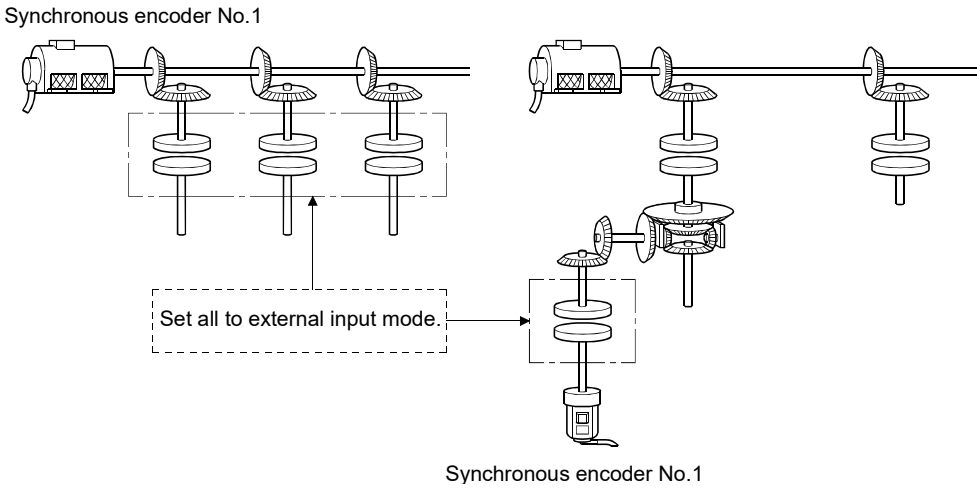

7.2.2 Parameters

The clutch parameters are shown in Table 7.2 and the parameters shown in this table are explained in items (1) to (11) below.
Refer to the help of MT Developer2 for the clutch parameter setting method.

Table 7.2 Clutch Parameter List

No.	Setting item	Default value	Setting range			Setting possible	
1	Operation mode	ON/OFF mode	ON/OFF mode	ON/OFF mode Address mode Address mode 2 One-shot mode combined use	External input mode	Direct clutch	Smoothing clutch
2	Mode setting device (1 word)	—	—	Word device	—	○	○
3	Clutch ON/OFF command device	—	Bit device			○	○
4	Clutch status	—	—/Bit device (Note-1)			○	○
5	Clutch ON address setting device (2 words)	—	—	Word device	—	○	○
6	Clutch OFF address setting device (2 words)						
7	Smoothing method	Time constant system	Time constant system/slippage system (Exponential function system/Linear acceleration deceleration system)			—	○
8	Smoothing time constant	—	1 to 65535 [ms]			—	○
9	Slippage setting device (2 words)	—	Word device			—	○
10	Slippage in-position range setting device (2 words)	—	Word device			—	○
11	Address mode clutch control system	Current value within 1 virtual axis revolution	Current value within 1 virtual axis revolution/ Current value of virtual axis			○ Valid when a cam/rotary table is set as the output module.	
12	Smoothing clutch complete signal	—	—/Bit device (Note-1)			—	○

(Note-1): The devices set in other clutch parameter cannot be used.

(1) Operation mode

(a) This device is used to set the mode to switch clutch ON/OFF.
The following three modes can be set.
- ON/OFF mode
- ON/OFF mode, address mode, address mode 2 and one-shot mode combined use
- External input mode

Refer to Section "7.2.1 Operation" for each operation modes.

(b) If a synchronous encoder is used as the drive module, the operation modes that can be set differ depending on the encoder interface connected to the Q173DPX/Q172DEX.

Encoder interface	Clutch operation mode		
	ON/OFF mode	Address mode, Address mode 2, One-Shot mode	External input mode
Manual pulse generator input (Q173DPX)	○	○	○
Serial encoder input (Q172DEX)	○	○	×

○ : Enable, × : Disable

(2) Mode setting device (only ON/OFF mode, address mode, address mode 2 and one-shot mode combined use, 1 word)

(a) This device is used to switch the ON/OFF mode and address mode.
The mode by mode setting device value are as follows:

Mode setting device No.	Name
0	ON/OFF mode
1	Address mode
2	Address mode 2
3, 4	One-shot mode

The mode setting device of except for "0 to 4" is regarded as an error, and an operation is continued at the previous setting value.

(b) The following devices can be used as the mode setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(3) Clutch ON/OFF command device

(a) This device is used to execute the clutch ON/OFF command.

(b) The following devices can be used as the clutch ON/OFF command device.

Name	Setting range
Input	X0 to X1FFF (Note-1)
Output	Y0 to Y1FFF
Internal relay	M0 to M8191 (Note-2)
Link relay	B0 to B1FFF
Annunciator	F0 to F2047
Multiple CPU area device	U□\G10000.0 to U□\G(10000+p-1).F (Note-3)

(Note-1): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

(Note-2): "M4000 to M4639 and M4800 to M5439" are the dedicated devices of virtual servo motor axis in the virtual mode.
Unused area of virtual servo motor axis can be used as a user side.

(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(4) Clutch status

(a) This device is used to indicate the clutch ON/OFF state.

(b) The following devices can be used as the clutch status.

Name	Setting range
Input	X0 to X1FFF (Note-1)
Output	Y0 to Y1FFF
Internal relay	M0 to M8191 (Note-2), (Note-3)
Link relay	B0 to B1FFF
Annunciator	F0 to F2047
Multiple CPU area device	U□\G10000.0 to U□\G(10000+p-1).F (Note-4), (Note-5)

(Note-1): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

(Note-2): "M4000 to M4639 and M4800 to M5439" are the dedicated devices of virtual servo motor axis in the virtual mode. Unused area of virtual servo motor axis can be used as a user side.

(Note-3): Use these parameters to use the device (M2160 to M2223) allocated to Q17□CPUN/Q17□HCPU.

(Note-4): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(Note-5): Only device of the self CPU can be used.

(5) Clutch ON/OFF address setting device (only ON/OFF mode, address mode, address mode 2 and one-shot mode combined use, 2 words)

(a) This device is used to set an address to turn the clutch on/off in the address mode.

(b) The following devices can be used as the clutch ON/OFF address setting devices.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3)

(Note-1): Set an even numbered the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The clutch ON/OFF address settings range is as follows.

1) The output module is a ball screw/roller, or output module is a cam/rotary table and the address mode clutch control system is current value of virtual axis.
-2147483648 (-2^{31}) to 2147483647 ($2^{31}-1$) [pulse]

2) The output module is a cam/rotary table, and the address mode clutch control system is current value within virtual axis revolution.
0 to number of pulses within 1 output axis revolution -1 [pulse]

(d) The clutch ON/OFF address setting device value according to the output module is as follows.
Refer to Section 7.2.1 (1) to (5) for details of each mode operation.

Ball screw/Roller	Rotary table/Cam
• Current value of virtual axis If the differential gear is connected to the main shaft, the device is current value after virtual servo motor axis main shaft's differential gear. [Example] 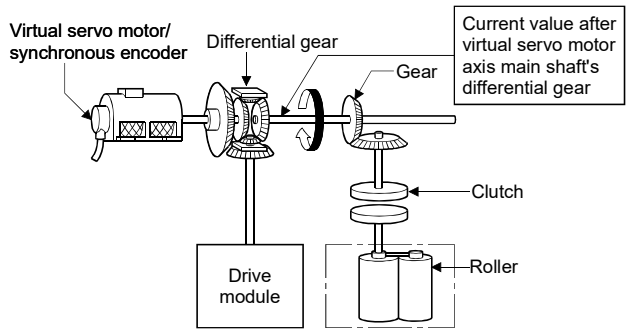 	Select between the following depending on the setting for address mode clutch. • Current value of virtual axis • Current value within 1 virtual axis revolution (Drive module travel value × Gear ratio %Nc) % : Remainder operator Nc : Number of pulses within 1 cam axis revolution [Example] 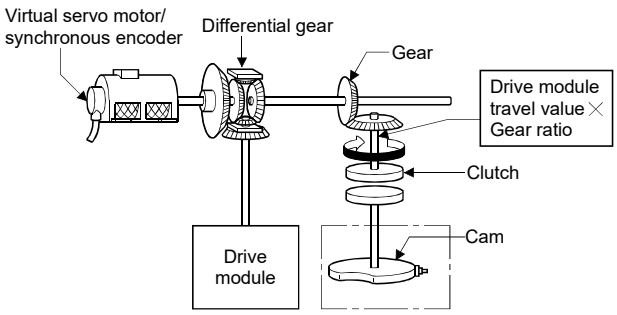

(6) Smoothing method

(a) The method for smoothing processing of the clutch is set.
The following three methods can be set:
• Time constant system
• Slippage system { Exponential function system / Linear acceleration/deceleration system }

(b) Refer to Section 7.2 for each system operation.

(7) Smoothing time constant
This is the time taken to reach 63[%] of the output axis speed.

(8) Slippage setting device (2 words)

(a) This device is used to set the slippage of clutch.

(b) The following devices can be used as the slippage setting device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3)

(Note-1): Set an even numbered the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for slippage is 0 to 2147483647 [pulse].

(9) Slippage in-position range setting device (2 words)

(a) This device is used to set the remainder slippage range for judge as smoothing completion.

(b) The following devices can be used as the slippage in-position range setting device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3)

(Note-1): Set an even numbered the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for remainder slippage is 0 to 2147483647 [pulse].

(d) When "(Remainder slippage) < (Slippage in-position range)" is set, the smoothing clutch complete signal turns on.
The smoothing clutch complete signal ON/OFF is refreshed by the operation cycle.

1) ON/OFF state of smoothing clutch is indicated. (Only exponential function system and linear acceleration/deceleration system are valid.)
   • ON ….."(Remainder slippage) < (Slippage in-position range)"
   • OFF…. Smoothing processing start (Clutch ON/OFF)
2) Set the slippage in-position range setting device to use the smoothing clutch complete signal.
3) Operation for smoothing clutch
   a) Exponential function system

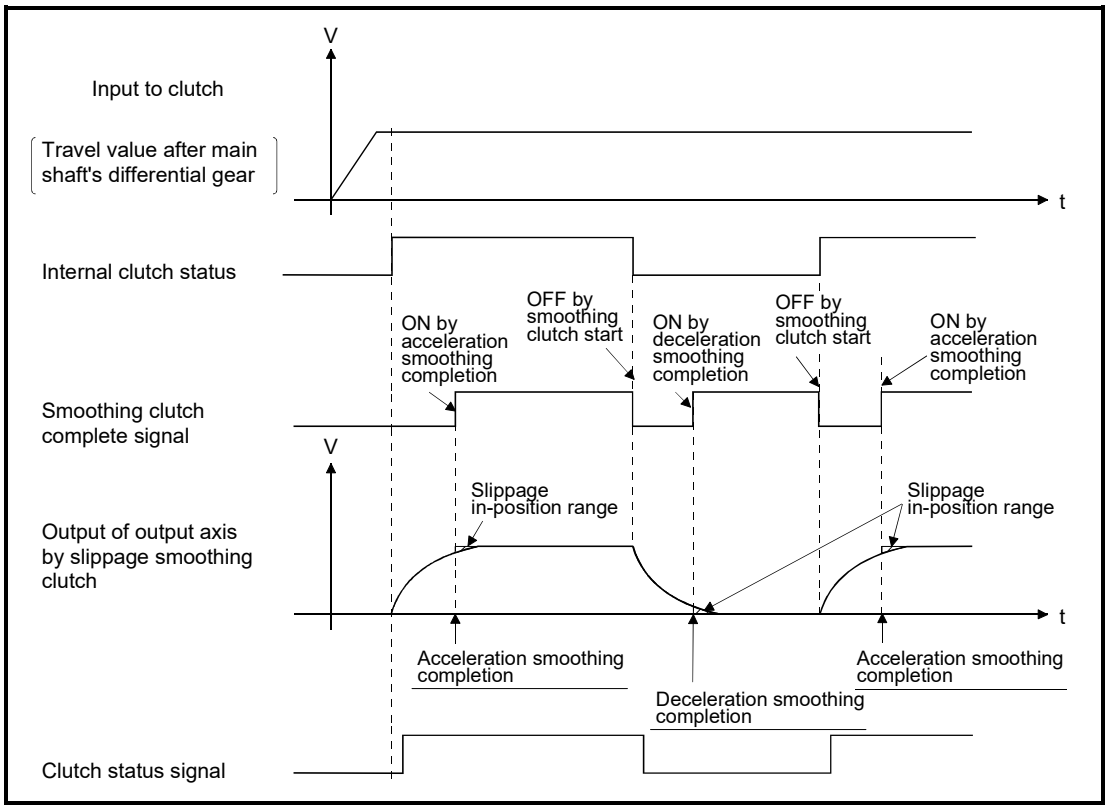

b) Linear acceleration/deceleration system

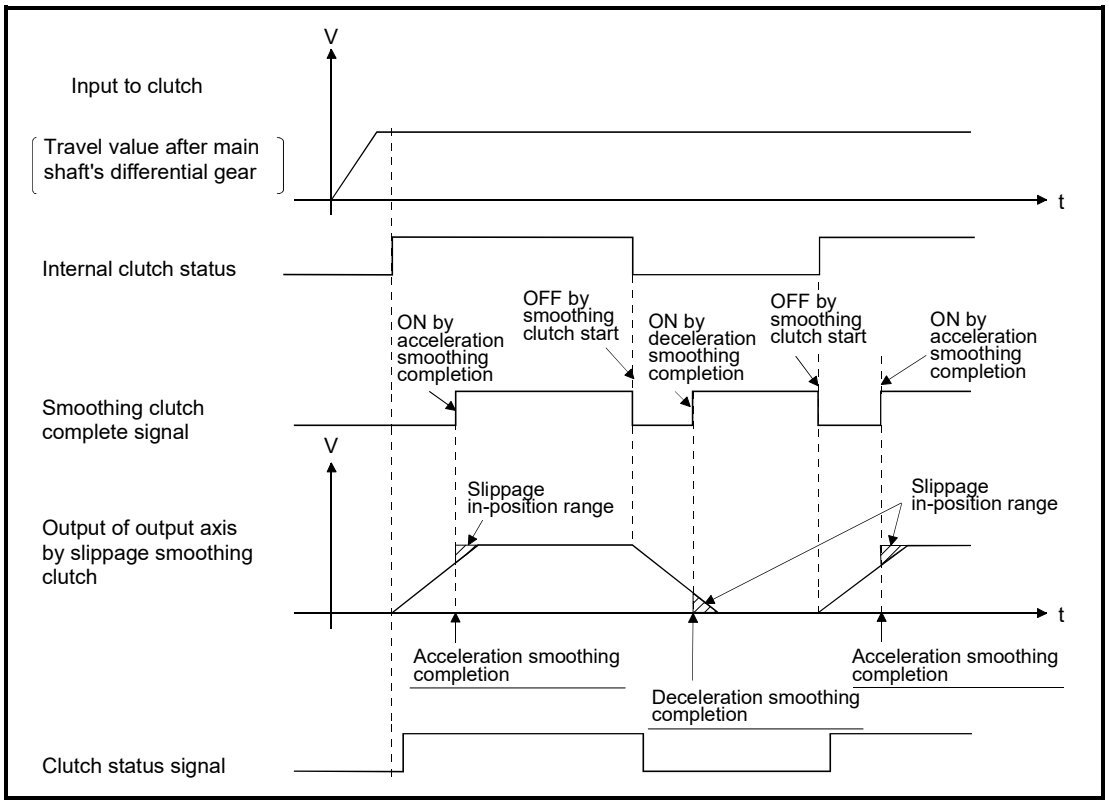

(e) When "0" is set in the slippage in-position range setting device, when a clutch is connected/disconnected completely (Remainder slippage=0), the smoothing clutch complete signal turns on.

(f) Slippage in-position range can be changed at any time.

(g) When the slippage in-position range setting device is not set, the smoothing clutch complete signal does not turns on.

(h) When the setting value for slippage in-position range setting device is outside the range, a minor error [5430] of output module will occur at the time of switching from real mode to virtual mode. In this case, it controls as a setting value "0".
Besides, the setting value for slippage in-position range is set outside the range during virtual mode operation, a minor error [6170] of output module will occur, and it controls as a setting value "0".

(10) Address mode clutch control system

(a) When a clutch is turned on by the setting value of ON/OFF address setting device in the address mode/address mode 2, the current value (current value within 1 virtual axis revolution/current value of virtual axis) of virtual axis to be used is selected.

1) Current value within 1 virtual axis revolution

….. The ON/OFF control is executed by the current value within 1 virtual axis revolution system.

2) Current value of virtual axis

….. The ON/OFF control is executed by the current value of virtual axis. When a differential gear is connected to the main shaft, the ON/OFF control is executed by the current value after the main shaft's differential gear.

(b) The output module connected to clutch is valid for cam/rotary table

(11) Smoothing clutch complete signal

(a) This device is used to confirm the completion of smoothing processing.

(b) The following devices can be used as the smoothing clutch complete signal.

Name	Setting range
Input	X0 to X1FFF (Note-1)
Output	Y0 to Y1FFF
Internal relay	M0 to M8191 (Note-2), (Note-3)
Link relay	B0 to B1FFF
Annunciator	F0 to F2047
Multiple CPU area device	U□\G10000.0 to U□\G(10000+p-1).F (Note-4), (Note-5)

(Note-1): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

(Note-2): "M4000 to M4639 and M4800 to M5439" are the dedicated devices of virtual servo motor axis in the virtual mode.
Unused area of virtual servo motor axis can be used as a user side.

(Note-3): Use these parameters to use the device (M5520 to M5583) allocated to Q17□CPUN/Q17□HCPU.

(Note-4): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(Note-5): Only device of the self CPU can be used.

7.3 Speed Change Gear

Speed change gear is used to change the rotation speed to output module and travel value during operation.
The operation of speed change gear and parameters required to use it are shown below.

7.3.1 Operation

This section describes the operation of speed change gear.

(1) The speed that the input axis speed multiplied by a speed change ratio set in the speed change ratio setting device is transmitted to output axis.

$$[\text{Output axis speed}] = [\text{Input axis speed}] \times \frac{[\text{Speed change ratio}]}{10000} [\text{pulse/s}]$$

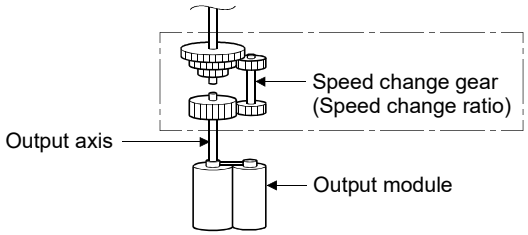

(2) When a speed change ratio changes, the acceleration/deceleration processing is executed by the smoothing time constant (t) set in the speed change gear parameters.

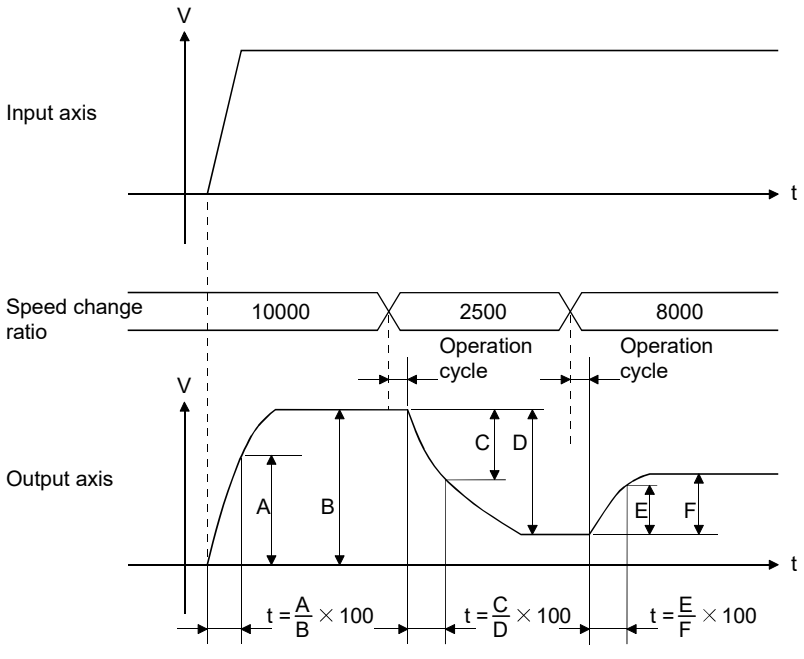

7.3.2 Parameters

The speed change gear parameters are shown in Table 7.3 and the parameters shown in this table are explained in items (1) to (3) below.
Refer to the help of MT Developer2 for the speed change gear parameter setting method.

Table 7.3 Speed Change Gear Parameter List

No.	Setting Item	Default	Setting range
1	Speed change ratio upper limit value	10000	0 to 65535
2	Speed change ratio lower limit value	1	0 to 65535
3	Speed change ratio setting device (1 word)	—	D0 to D8191
			W0 to W1FFF
			#0 to #7999
			U□\G10000 to U□\G(10000+p-1) (Note-1)
4	Smoothing time constant	0	0 to 65535 [ms]

(Note-1): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(1) Speed change ratio upper/lower limit value

(a) The validate range (0.00 to 655.35[%]) of speed change ratio set in the speed change ratio setting device is set.

(b) When the setting value of speed change ratio setting device is greater than the speed change ratio upper limit value, an operation is executed by a speed change ratio clamped at the upper limit value.
When the setting value of speed change ratio setting device is smaller than the speed change ratio lower limit value, an operation is executed by a speed change ratio clamped at the lower limit value.

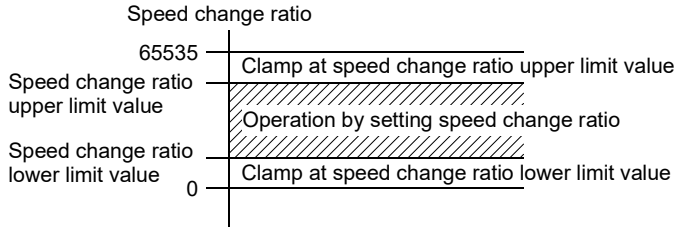

(c) The speed change ratio upper/lower limit value is set in the range of 0 to 65535, i.e. 100 times the settings actually made: 0.00 to 655.35%.

(d) Set the speed change ratio upper/lower limit value as formula below.

$$0 \leq (\text{Speed change ratio lower limit value}) \leq (\text{Speed change ratio upper limit value}) \leq 65535$$

(2) Speed change ratio setting device

(a) The device to set a speed change ratio of speed change gear.

(b) The following devices can be used as the speed change ratio setting devices.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range is "Speed change ratio lower limit value" to "Speed change ratio upper limit value".

(3) Smoothing time constant

This is the time taken to reach 63[%] of the output axis speed.

7.4 Differential Gear

The differential gear is used for the following purposes;
• Output module phase is shifted or alignment of operation start position is executed.
• Individual operation separated from the virtual main shaft is executed.

7.4.1 Operation

(1) When the output module phase is shifted or alignment of the operation start position is executed.

(a) When the input axis clutch is ON.
The differential gear subtracts the auxiliary input shaft travel value from the input shaft travel value and transmits this to the output axis.

$$\begin{pmatrix}\text{Output axis}\\ \text{travel value}\end{pmatrix} = \begin{pmatrix}\text{Input axis}\\ \text{travel value}\end{pmatrix} - \begin{pmatrix}\text{Auxiliary input axis}\\ \text{travel value}\end{pmatrix} \text{ [pulse]}$$

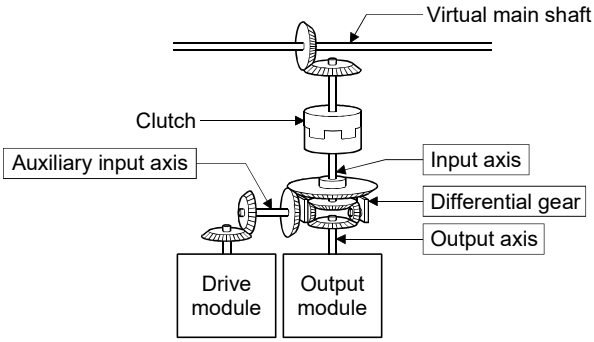

(b) When the input axis clutch is OFF.
Individual operation is possible using the auxiliary input axis since the differential gear transmits only the travel value from the auxiliary input axis to the output axis.

(2) When the differential gear is used to connect to the virtual main shaft.
This is used for operation in which the main shaft is switched or when the same drive module is used as auxiliary input to control all blocks.

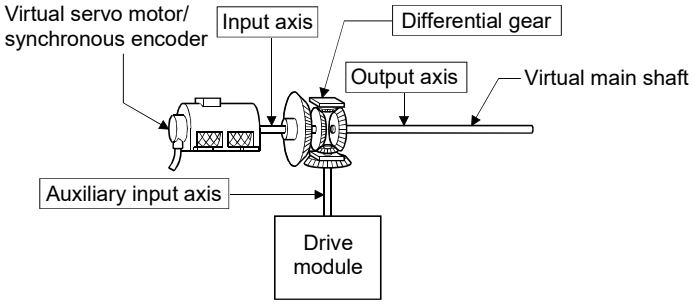

Set the different drive modules for virtual main shaft side and auxiliary input axis side.

7.4.2 Parameters

No parameters need to be set for the differential gear.

MEMO

8. OUTPUT MODULE

The command pulse output from drive module is input to output module via the transmission module.
The travel value of servo motor is controlled by the command pulse from output module.
There are following four output modules.
The parameters in accordance with that mechanism is set if necessary.

• Roller..... Section 8.1
• Ball screw..... Section 8.2
• Rotary table..... Section 8.3
• Cam ..... Section 8.4

(1) Output module types

Output module types are shown below.

Module	Details	Applications
Roller	The speed control is executed with the final output (axis).	
Ball screw	The linear position control is executed with the final output (axis).	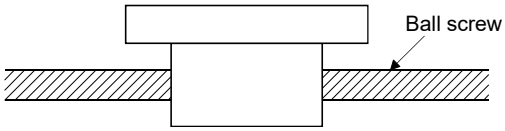
Rotary table	The angle control is executed with the final output (axis).	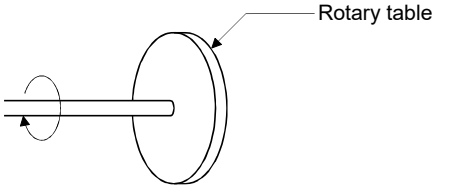
Cam	The electronic cam operation is executed with the final output (axis).	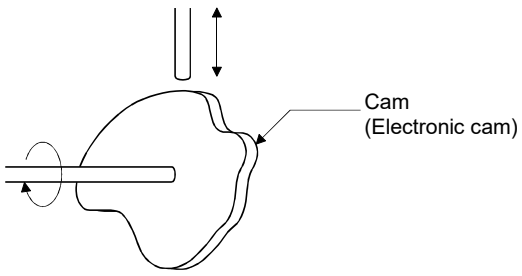

(2) Device range of output module parameters and device data input

The device range and setting method of items set in the indirect setting by devices among the output module parameters are shown below.

(a) Device range

The number of device words and device range in the indirect setting are shown below.

<table>
<tr><th>Module</th><th>Item</th><th>Number of device words</th><th>Device range</th><th>Remark</th></tr>
<tr><td>Roller</td><td>Torque limit value setting device</td><td>1</td><td rowspan="10"><table><tr><th>Device</th><th>Range</th></tr><tr><td>D</td><td>0 to 8191</td></tr><tr><td>W</td><td>0 to 1FFF</td></tr><tr><td>#</td><td>0 to 7999</td></tr><tr><td>U□\G</td><td>10000 to (10000+p-1) (Note-1)</td></tr></table></td><td rowspan="11"></td></tr>
<tr><td>Ball screw</td><td>Torque limit value setting device</td><td>1</td></tr>
<tr><td rowspan="3">Rotary table</td><td>Torque limit value setting device</td><td>1</td></tr>
<tr><td>Current value within 1 virtual axis revolution storage device (Main shaft side)</td><td>2</td></tr>
<tr><td>Current value within 1 virtual axis revolution storage device (Auxiliary input axis side)</td><td>2</td></tr>
<tr><td rowspan="8">Cam</td><td>Number of pulses per cam shaft revolution (Nc) QDS</td><td>2</td></tr>
<tr><td>Cam No. setting device</td><td>1</td></tr>
<tr><td>Stroke amount setting device</td><td>2</td></tr>
<tr><td>Torque limit value setting device</td><td>1</td></tr>
<tr><td>Lower stroke limit value storage device</td><td>2</td></tr>
<tr><td>Current value within 1 virtual axis revolution storage device (Main shaft side)</td><td>2</td></tr>
<tr><td>Current value within 1 virtual axis revolution storage device (Auxiliary input axis side)</td><td>2</td></tr>
<tr><td>Cam/ball screw switching command device</td><td>Bit</td><td><table><tr><th>Device</th><th>Range</th></tr><tr><td>X</td><td>0 to 1FFF (Note-2)</td></tr><tr><td>Y</td><td>0 to 1FFF</td></tr><tr><td>M</td><td>0 to 8191</td></tr><tr><td>B</td><td>0 to 1FFF</td></tr><tr><td>F</td><td>0 to 2047</td></tr><tr><td>U□\G</td><td>10000.0 to (10000+p-1).F (Note-1)</td></tr></table></td></tr>
</table>

(Note-1): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(Note-2): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

POINT

(1) Be sure to set even-numbered device of the items set as 2-word.
Be sure to set as 32-bit integer type when the data is set in these devices using the Motion SFC programs.
(2) When a 2-word monitor device is read in the Motion SFC program, read it as 32-bit integer type.
(3) Refer to Chapter 2 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for the user setting area points of the Multiple CPU high speed transmission area.

(b) Device data input

All indirect setting device data are input as "initial value" at the switching real mode/virtual mode, thereafter the input control for module is executed during the virtual mode operation.

The input timing and refresh cycle of setting device are shown below.

Module	Item	Input device	Refresh device	Device input timing		Refresh cycle
				Real mode /Virtual mode switching	During the Virtual mode operation	
Roller	Torque limit value setting device	○	_	○	Input for every operation cycle. (Note)	_
Ball screw	Torque limit value setting device	○	_	○		
Rotary table	Torque limit value setting device	○	_	○		
	Current value within 1 virtual axis revolution storage device (Main shaft side)	_	○	_	_	Operation cycle (Note)
	Current value within 1 virtual axis revolution storage device (Auxiliary input axis side)	_	○	_		
Cam	Number of pulses per cam shaft revolution (Nc) QDS	○	_	○	_	_
	Cam No. setting device	○	_	○	Input for every operation cycle. (Note) However, the cam No. and stroke amount switching position pass point are valid.	
	Stroke amount setting device	○	_	○		
	Torque limit value setting device	○	_	○	Input for every operation cycle. (Note)	
	Lower stroke limit value storage device	_	○	_	_	Operation cycle (Note)
	Current value within 1 virtual axis revolution storage device (Main shaft side)	_	○	_		
	Current value within 1 virtual axis revolution storage device (Auxiliary input axis side)	_	○	_		
	Cam/ball screw switching command device	○	_	○	Input for every operation cycle. (Note)	_

REMARK

(Note): The operation cycle is set in the "operation cycle setting" of system basic setting.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for details.

8.1 Rollers

The rollers are used in the following cases.
- The machine connected to the servo motor is operated continuously.
- The system which does not need position control.
  (It is used when the speed control (cycle speed/number of rotations) mainly is controlled without the current value and position data.)

This section describes the roller operation and parameters required to use a roller.

8.1.1 Operation

(1) Operation

(a) The roller is controlled with the speed that the speed/travel value of drive module multiplied by a gear ratio/speed change ratio of transmission module, and it rotates for the travel value.

Roller speed	= (Drive module speed [pulse/s])	× (Gear ratio) × (Speed change ratio) [pulse/s]
Number of roller revolution	= (Drive module travel value [pulse])	× (Gear ratio) × (Speed change ratio) [pulse]

The speed/travel value of drive module transmitted to the roller is commanded to the servo amplifier.

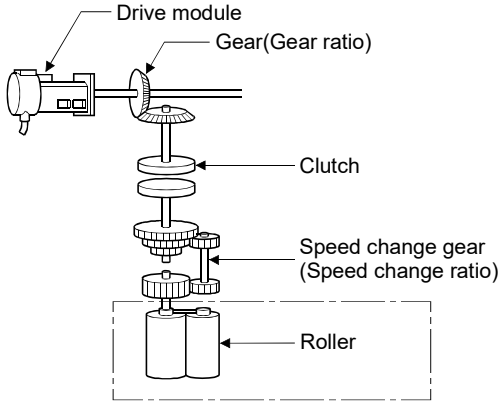

(b) When a clutch is used, the roller is controlled at clutch ON.

(2) Control details

(a) The roller has no current value.
However, when it switches from the virtual mode to real mode, it reaches the current value corresponding to the position moved in the virtual mode.
• The current value is a ring address within the range of -2147483648 (-2^{31}) to 2147483647 (2^{31}-1) [pulse].

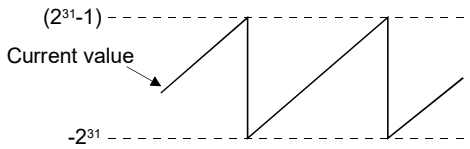

(b) Backlash compensation processing is continued with the settings value of fixed parameters even if it switches the real mode/virtual mode.

(c) The roller cycle speed can be monitored using MT Developer2 and the roller cycle speed storage register.
Refer to Section 8.1.2 for the calculation formula of roller cycle speed, and refer to Section 4.2.1 for details of the roller cycle speed storage register.

8.1.2 Parameter list

The roller parameters are shown in Table 8.1 and the parameters shown in this table are explained in items (1) to (6) below.
Refer to the help of MT Developer2 for the roller parameter setting method.

Table 8.1 Roller Parameter List

No.	Setting item	Default	Setting range	
1	Output axis No.	0	Q173DSCPU/Q173DCPU(-S1): 1 to 32 Q172DSCPU : 1 to 16 Q172DCPU(-S1) : 1 to 8	
2	Output unit	mm	mm	inch
3	Roller diameter (L)	0	0.1 to 214748364.7 [μm]	0.00001 to 21474.83647 [inch]
4	Number of pulses per roller revolution (N_L)	0	1 to 2147483647 [pulse]	
5	Permissible droop pulse value	6553500	1 to 1073741824 [pulse]	
6	Speed limit value (V_L)	0	0.01 to 6000000.00 [mm/min]	0.001 to 600000.000 [inch/min]
7	Torque limit value setting device (1 word)	—	-(300[%]) / word device (D, W, #, U□\G)	
8	Comment	None	32 characters	

(1) Output unit

(a) This device is used to set the unit ([mm]/[inch]) of roller.

(b) The unit (unit in the fixed parameter) for the axis which execute the roller setting in the real mode is permissible to use the any of [mm], [inch], [degree] and [pulse].

(2) Roller diameter (L)/Number of pulses per roller revolution (N_L)

(a) The roller diameter connected to servo motor and the number of pulses per roller revolution are displayed.



(b) The roller cycle speed is calculated by the roller diameter and number of pulses per roller revolution as the formula below.

1) Unit : [mm]

$$[\text{Roller cycle speed}] = \left(\begin{array}{c}\text{Number of input}\\ \text{pulses per minute}\end{array}\right) \times \frac{\pi \times L}{N_L} [\text{mm/min}] \quad L : [\text{mm}]$$

2) Unit : [inch]

$$[\text{Roller cycle speed}] = \left(\begin{array}{c}\text{Number of input}\\ \text{pulses per minute}\end{array}\right) \times \frac{\pi \times L}{N_L} [\text{inch/min}] \quad L : [\text{inch}]$$

The value calculated by calculations 1) and 2) is stored with an integer value in the roller cycle speed storage register.

Output unit	Roller cycle speed storage register
mm	Calculated value × 100
inch	Calculated value × 1000

(3) Permissible droop pulse value

(a) This device is used to set the permissible droop pulse value of deviation counter.

(b) The deviation counter value is continually checked, and if it becomes larger than the permissible droop pulse value, the error detection signal (M2407+20n) turns on.
However, since the roller axis operation continues, execute the error processing by user side.

(4) Speed control limit (V_L)

(a) This device is used to set the maximum speed of roller axis.

(b) Set the speed limit value within the following range.

$$1 \leq \frac{V_L \times N_L}{60 \times \pi \times L} \leq 2147483647[\text{pulse/s}]$$

V_L : [mm/min] or [inch/min]
L : [mm] or [inch]

(c) When the roller axis speed exceeds the speed limit value, the error detection signal (M2407+20n) turns on.
However, the roller axis speed is not clamped.

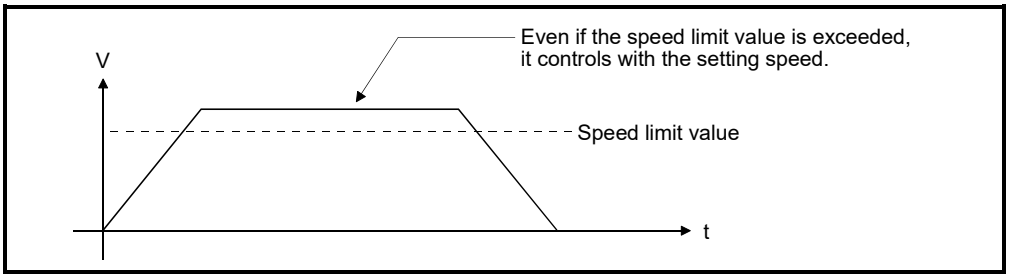

(5) Torque limit value setting device (1 word)

(a) This device is used to set the torque limit value of roller axis.
When the device is set, the torque control is executed with the preset device value.
In the virtual mode, the torque limit setting is always valid.
If the device is not set, the torque limit is set at 300[%].

(b) The following devices can be set as the torque limit setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for torque limit value is 1 to 1000[%].

(6) Comment

(a) This device is used to create a comment such as purpose of roller axis.
Made comment can be displayed at monitoring using MT Developer2.

(b) Comments up to 32 characters long can be created.

POINT

(1) "Roller diameter" or "number of pulses per roller revolution" set in the roller parameter is used for only the cycle speed monitor of servo motor, and it is not related to the rotation speed/travel value of servo motor.

(2) The roller cycle speed monitor device is the same for the "feed current value" in the real mode. Therefore, the position address (current value) of roller axis cannot be monitored in the virtual mode.
When it switches from the virtual mode to real mode, the certain value is stored in the position address (current value). The value at this time is an unfixed value.

8.2 Ball Screw

The ball screw is used to make a machine connected to servo motor operate linearly. This section describes the ball screw operation and parameters required to use ball screws.

8.2.1 Operation

(1) Operation

(a) The ball screw is controlled with the speed that the speed/travel value of drive module multiplied by a gear ratio of transmission module, and the travel value is output.

(Ball screw speed)	= (Drive module speed [pulse/s])	×	(Gear ratio)	[pulse/s]
(Ball screw travel value)	= (Drive module travel value [pulse])	×	(Gear ratio)	[pulse]

The speed/travel value of drive module transmitted to the ball screw is commanded to the servo amplifier.

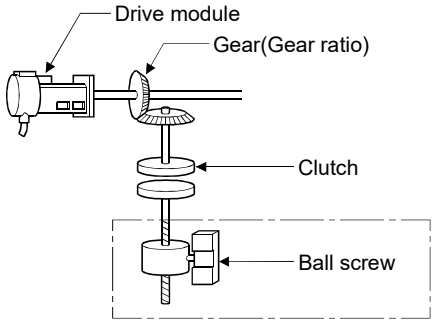

(b) When a clutch is used, the ball screw is controlled at clutch ON.

(2) Control details

(a) Feed current value is continued, even if it switches from the real mode to virtual mode/from the virtual mode to real mode.

(b) Backlash compensation processing is continued with the settings value of fixed parameters, even if it switches the real/virtual mode.

8.2.2 Parameter list

The ball screw parameters are shown in Table 8.2 and the parameters shown in this table are explained in items (1) to (7) below.
Refer to the help of MT Developer2 for the ball screw parameter setting method.

Table 8.2 Ball Screw Parameter List

No.	Setting Item	Default	Setting range	
1	Output axis No.	0	Q173DSCPU/Q173DCPU(-S1): 1 to 32 Q172DSCPU : 1 to 16 Q172DCPU(-S1) : 1 to 8	
2	Output unit	mm	mm	inch
3	Ball screw pith (P)	Must be not set. It is controlled with the fixed parameter.		
4	Number of pulses per ball screw revolution (NP)			
5	Permissible droop pulse value	6553500	1 to 1073741824 [pulse]	
6	Upper stroke limit value	214748364.7	-214748364.8 to 214748364.7 [μm]	-21474.83648 to 21474.83647 [inch]
7	Lower stroke limit value	0		
8	Speed limit value (VL)	0	0.01 to 6000000.00 [mm/min]	0.001 to 600000.000 [inch/min]
9	Torque limit value setting device (1 word)	—	-(300[%]) / word device (D, W, #, U□\G)	
10	Comment	None	32 characters	

(1) Output unit

(a) This device is used to set the unit ([mm]/[inch]) of ball screw.

(b) Set the same unit as used in the real mode (unit in the fixed parameters) for the ball screw unit.
If the ball screw unit differs unit in the real mode, a mode switching error will occur at the switching from real mode to virtual mode.

(2) Ball screw pitch(P)/Number of pulses per ball screw revolution(NP)

(a) The ball screw pitch connected to the servo motor and number of pulses per ball screw revolution are displayed.

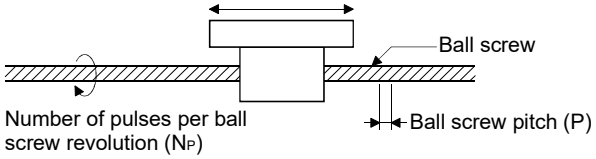

(b) The travel value per pulse is calculated by the ball screw pitch and number of pulses per ball screw revolution as the formula below.

$$[\text{Travel value per pulse}] = \frac{P}{N_P}$$

POINT

"Ball screw pitch" or "number of pulses per ball screw revolution" is used for only the cycle speed monitor of servo motor, and it is not related to the rotation speed/travel value of servo motor.

(3) Permissible droop pulse value

(a) This device is used to set the permissible droop pulse value of deviation counter.

(b) The deviation counter value is continually checked, and if it becomes larger than the permissible droop pulse value, the error detection signal (M2407+20n) turns on.
However, since the ball screw axis operation continues, execute the error processing by user side.

(4) Upper/lower stroke limit value

(a) This device is used to set the stroke range in the virtual mode.

(b) When it exceeds the stroke range during operation, the error detection signal (M2407+20n) turns on.
However, a stop processing of ball screw axis is not executed.

(5) Speed limit value (VL)

(a) This device is used to set the maximum speed of ball screw axis.

(b) Set the speed limit value within the following range.

1) Unit : [mm]

$$1 \leq \frac{V_L \times 10^4 \times N_P}{60 \times P} \leq 2147483647 \quad [\text{pulse/s}]$$

2) Unit : [inch]

$$1 \leq \frac{V_L \times 10^5 \times N_P}{60 \times P} \leq 2147483647 \quad [\text{pulse/s}]$$

(c) When the ball screw axis speed exceeds the speed limit value, the error detection signal (M2407+20n) turns on.
However, the ball screw axis speed is not clamped.

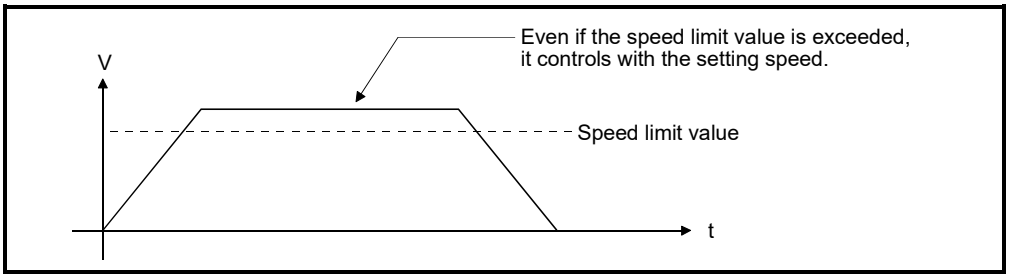

(6) Torque limit value setting device (1 word)

(a) This device is used to set the torque limit value of ball screw axis.
When the device is set, the torque control is executed with the preset device value.
In the virtual mode, the torque limit setting is always valid.
If the device is not set, the torque limit is set at 300[%].

(b) The following devices can be set as the torque limit value setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for the torque limit value is 1 to 1000[%].

(7) Comment

(a) This device is used to create a comment such as purpose of ball screw axis.
Made comment can be displayed at monitoring using MT Developer2.

(b) Comments up to 32 characters long can be created.

8.3 Rotary Tables

The rotary table is used to make a machine connected to the servo motor gyrate.
This section describes the rotary table operation and parameters required to use rotary table.

8.3.1 Operation

(1) Operation

(a) The rotary table is controlled with the speed that the speed/travel value of drive module multiplied by a gear ratio of transmission module, and the travel value is output.

(Rotary table speed)	= (Drive module speed) [pulse/s]	×	(Gear ratio)	[pulse/s]
(Rotary table travel value)	= (Drive module travel value) [pulse]	×	(Gear ratio)	[pulse]

The speed/travel value of drive module transmitted to the rotary table is commanded to the servo amplifier.

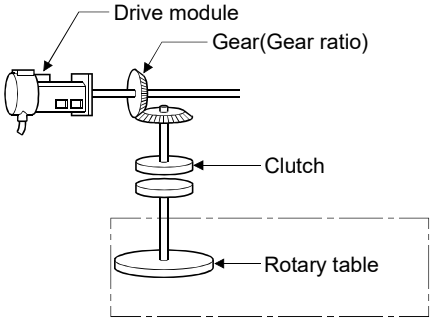

(b) When a clutch is used, the rotary table is controlled at clutch ON.

(2) Control details

(a) Feed current value is continued, even if it switches from the real mode to virtual mode/from the virtual mode to real mode.

(b) Backlash compensation processing is continued with the settings value of fixed parameters, even if it switches the real mode/virtual mode.

8.3.2 Parameter list

The rotary table parameters are shown in Table 8.3 and the parameters shown in this table are explained in items (1) to (8) below.
Refer to the help of MT Developer2 for the rotary table parameter setting method.

Table 8.3 Rotary Table Parameter List

No.	Setting Item	Default	Setting range
1	Output axis No.	0	Q173DSCPU/Q173DCPU(-S1): 1 to 32 Q172DSCPU : 1 to 16 Q172DCPU(-S1) : 1 to 8
2	Number of pulses per rotary table revolution (N_D)	Must be not set. It is controlled with the fixed parameter.	
3	Permissible droop pulse value	6553500	1 to 1073741824 [pulse]
4	Upper stroke limit value	0	0 to 359.99999 [degree]
5	Lower stroke limit value	0	0 to 359.99999 [degree]
6	Speed limit value (V_L)	0	0.001 to 2147483.647 [degree/min] (Note-1)
7	Torque limit value setting device (1 word)	—	-(300[%]) / word device (D, W, #, U□\G)
8	Comment	None	32 characters
9	Current value within 1 virtual axis revolution storage device (Main shaft side) (2 words)	—	- / word device (D, W, #, U□\G)
10	Current value within 1 virtual axis revolution storage device (Auxiliary input axis side) (2 words)	—	- / word device (D, W, #, U□\G)

(Note-1): When the "speed control 10× multiplied speed setting for degree axis" is set to "valid", the setting range is 0.01 to 21474836.47[degree/min].

(1) Number of pulses per rotary table revolution (N_D)

(a) The number of pulses per rotary table connected to the servo motor revolution is displayed.



Displayed items	Displayed range
Number of pulses per rotary table revolution (N_D)	Must be not set. It is controlled with the fixed parameter. $N_D = A_P[\text{pulse}] \times \frac{360[\text{degree}]}{A_L[\text{degree}]}$ A_P : Number of pulsesl value per revolution of fixed parameter A_L : Travel value per revolution of fixed parameter

(b) The travel value per pulse is calculated from the number of pulses per rotary table revolution in accordance with the following formula:

$$[\text{Travel value per pulse}] = \frac{360}{N_D} [\text{degree}]$$

POINT

"Number of pulses per rotary table revolution" is used for only the cycle speed monitor of servo motor, and it is not related to the rotation speed/travel value of servo motor.

(2) Permissible droop pulse value

(a) This device is used to set the permissible droop pulse value of deviation counter.

(b) The deviation counter value is continually checked, and if it becomes larger than the permissible droop pulse value, the error detection signal (M2407+20n) turns on.
However, since the rotary table axis operation continues, execute the error processing by user side.

(3) Upper/lower stroke limit value

(a) This device is used to set the stroke range in the virtual mode.
The upper/lower stroke limit setting determines whether the stroke limit is valid or not. If the upper stroke limit value is equal to the lower stroke limit value, the stroke limit is invalid.

(b) When it exceeds the stroke range during operation, the error detection signal (M2407+20n) turns on.
However, a stop processing of rotary table axis is not executed.

(4) Speed limit value (V_L)

(a) This device is used to set the maximum speed of rotary table axis.

(b) Set the speed limit value within the following range.

$$1 \leq \frac{V_L \times 10^5 \times N_D}{60 \times 360 \times 10^5} \leq 2147483647[\text{pulse/s}]$$

(c) When the rotary table axis speed exceeds the speed limit value, the error detection signal (M2407+20n) turns on.
However, the rotary table axis speed is not clamped.

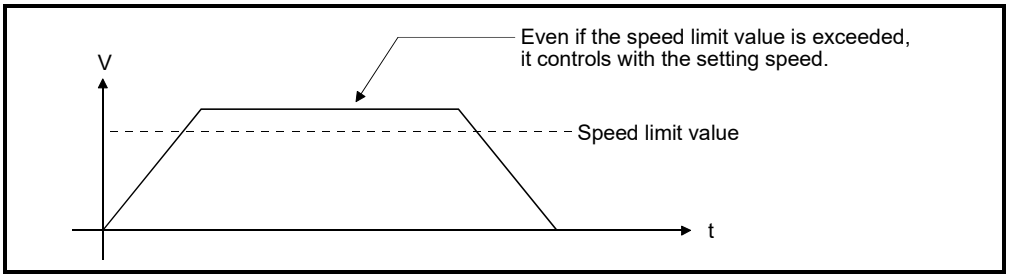

(5) Torque limit value setting device (1 word)

(a) This device is used to set the torque limit value of rotary table axis.
When the device is set, the torque control is executed with the preset device value.
In the virtual mode, the torque limit setting is always valid.
If the device is not set, the torque limit is set at 300[%].

(b) The following devices can be set as the torque limit value setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for torque limit value is 1 to 1000[%].

(6) Comment

(a) This device is used to create a comment such as purpose of rotary table axis.
Made comment can be displayed at monitoring using MT Developer2.

(b) Comments up to 32 characters long can be created.

(7) Current value within 1 virtual axis revolution storage device (Main shaft side) (2 words)

This parameter is set when the address mode clutch is set at the rotary table main shaft side.

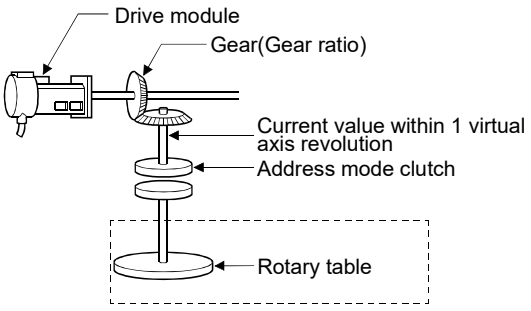

Current value within 1 virtual axis revolution
= (Drive module travel value × gear) %ND
(% : Remainder operator)

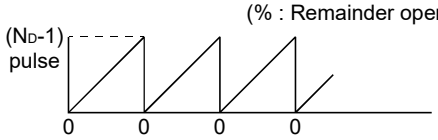

The reference position (0) for the current value within 1 virtual axis revolution is set with the address clutch reference setting command (M3213+20n).

(a) The current value within 1 virtual axis revolution of rotary table main shaft side is stored in the preset device.

(b) The following devices can be set as the current value within 1 virtual axis revolution storage device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3), (Note-4)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): Only device of the self-CPU can be used.

(c) The current value within 1 virtual axis revolution is the range of 0 to (ND-1) [pulse].
(ND: Number of pulses per rotary table revolution)

(d) The address mode clutch is turned on/off with the specified address of the current value within 1 virtual axis revolution range of 0 to (ND-1) [pulse]. Therefore, set the address value within the range of 0 to (ND-1) [pulse] in the clutch ON/OFF address setting device.

(e) The current value within 1 virtual axis revolution reference position "0" is set by turning the address clutch reference setting command (M3213+20n) on and switching to the virtual mode.
The current values within 1 virtual axis revolution for both the main shaft and the auxiliary input axis is set to "0" at this time.
If the address clutch reference setting command (M3213+20n) is turned off and it switches to the virtual mode, the following processing is executed depending on the drive module.
- If the drive module is a virtual servo motor or an incremental synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis in the previous virtual mode.
- If the drive module is an absolute synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis calculated from the current value of synchronous encoder.

(f) An example of an address mode clutch operation is shown below.

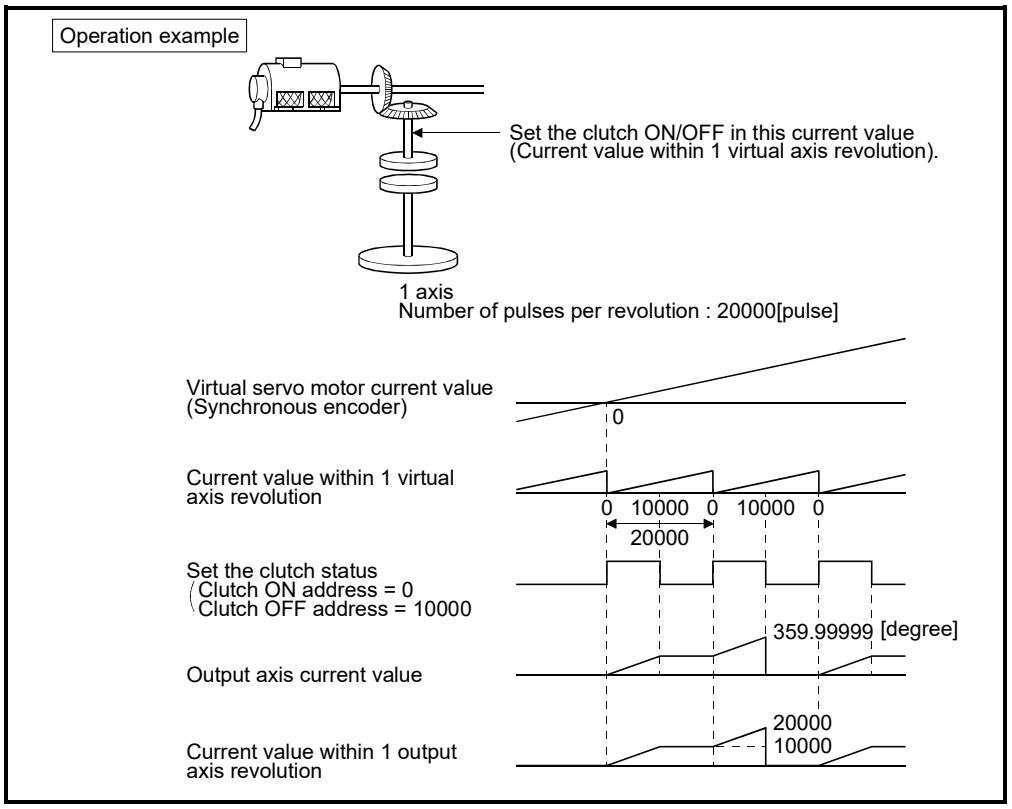

(8) Current value within 1 virtual axis revolution storage device (Auxiliary input axis side) (2 words)

This parameter is set when the address mode clutch is set at the rotary table auxiliary input axis side.

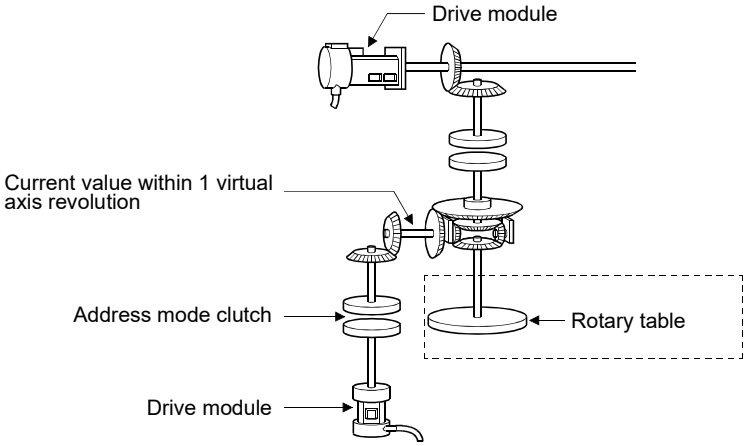

(a) By setting the current value within 1 virtual axis revolution of rotary table auxiliary input axis side for the current value within 1 virtual axis revolution is stored in the preset device.

$$\text{Current value within 1 virtual axis revolution of auxiliary input axis side} = \text{Drive module travel value of auxiliary input axis side} \times \frac{\text{Gear ratio}}{\text{Number of pulses per rotary table revolution}}$$

(Note): Current value within 1 virtual axis revolution of auxiliary input axis side is updated regardless of clutch ON/OFF.

(b) The following devices can be set as the current value within 1 virtual axis revolution storage device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3), (Note-4)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): Only device of the self CPU can be used.

(c) The current value within 1 virtual axis revolution is the range of 0 to (ND-1) [pulse].
(ND: Number of pulses per rotary table revolution)

(d) The address mode clutch is turned on/off with the specified address of the current value within 1 virtual axis revolution range of 0 to (ND-1) [pulse]. Therefore, set the address value within the range of 0 to (ND-1) [pulse] in the clutch ON/OFF address setting device.

(e) The current value within 1 virtual axis revolution reference position "0" is set by turning the address clutch reference setting command (M3213+20n) on and switching to the virtual mode.
The current values within 1 virtual axis revolution for both the main shaft and the auxiliary input axis is set to "0" at this time.
If the address clutch reference setting command (M3213+20n) is turned off and it switches to the virtual mode, the following processing is executed depending on the drive module.
- If the drive module is a virtual servo motor or an incremental synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis in the previous virtual mode.
- If the drive module is an absolute synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis calculated from the current value of synchronous encoder.

(f) An example of an address mode clutch operation is shown below.

Operation example

Main shaft side clutch OFF

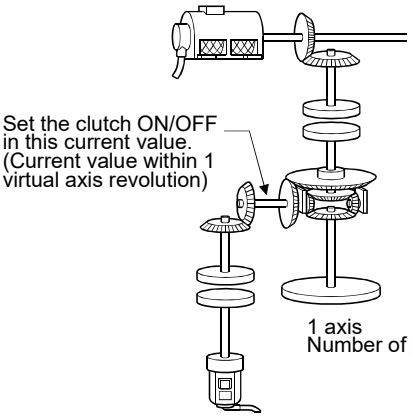

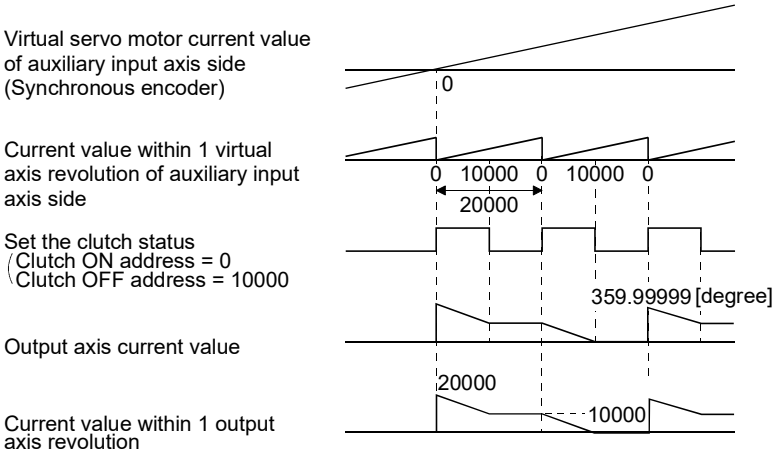

(Note): The rotation of output axis is reversed by differential gear.

POINT
When the number of pulses per virtual axis revolution is not an integer value, a virtual axis revolution may not become a rotary table revolution.

8.4 Cam

Cam is used to make a machine connected to the servo motor operate according to the preset cam pattern.

(1) For axes at which the cam is set as the output module, the same operation as a cam is executed using a ball screw as shown in the example below.

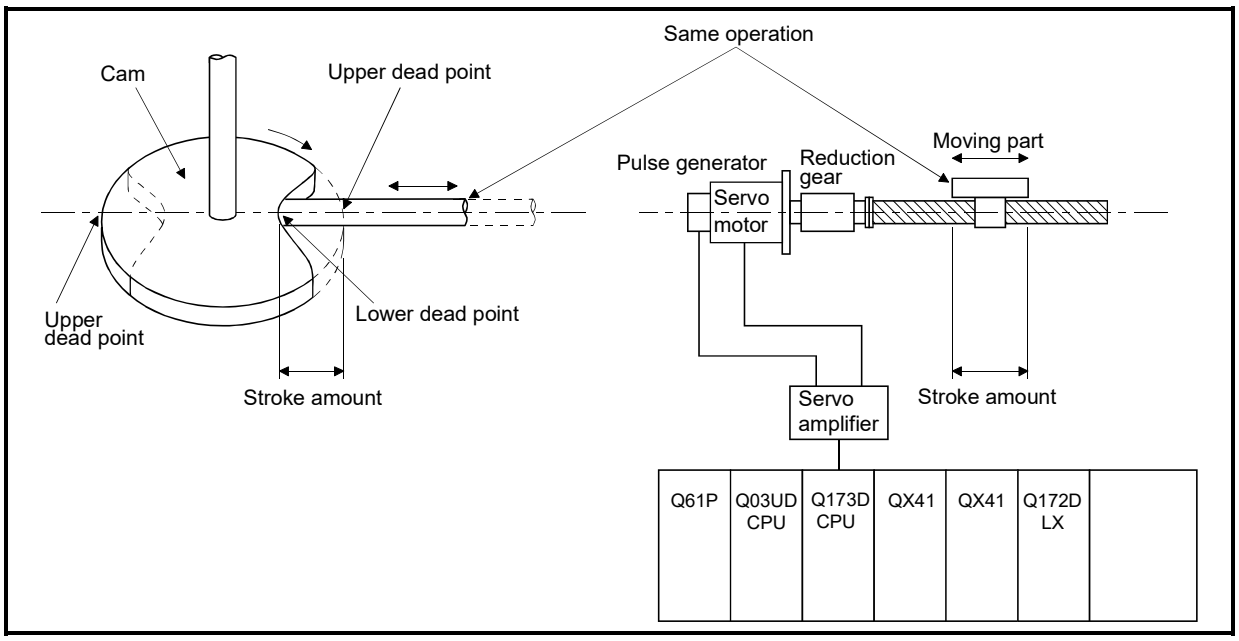

(2) The following two types data required to use a cam.

- Settings item at cam data creation.
  It is set at cam data (cam curve) creation using the MT Developer2.
  (Refer to Section 8.4.2)
- Cam parameters
  These are the parameters used to set to cam in the output module at mechanical system program creation.
  (Refer to Section 8.4.3)

8.4.1 Operation

This section describes the cam operation.

(1) Procedure for switching from the real mode to virtual mode

Set the devices by the following procedure using the Motion SFC program at the switching from real mode to virtual mode.

(a) Set the following details.
- Set the cam No. and stroke amount in the "cam No. setting device" and "stroke amount setting device" set in each cam shaft parameters.
- Turn the cam reference position setting command (M3214+20n) on/off as required.
  (Refer to Section 4.1.2 (4))

↓

(b) Execute the real mode/virtual mode switching request.
(M2043: OFF → ON)

↓

(c) Start operation based on the cam pattern, stroke amount and cam reference setting command set in each cam shaft.

(2) Processing at the switching from the real mode to virtual mode

The current value within 1 cam shaft revolution is indexed based on the cam reference position setting command (M3214+20n), feed current value, lower stroke limit value, stroke amount and cam No. (cam pattern) at the switching from real mode to virtual mode.

(3) Operation

A value calculated by the stroke ratio of cam data table based on the current value within 1 cam shaft revolution is output.

[Feed current value] = [Lower stroke limit value] + [Stroke amount] × [Stroke ratio]

The current value within 1 cam shaft revolution is set by the travel value that the travel value of drive module multiplied by a gear ratio of transmission module. Number of pulses per stroke amount is controlled based on the travel value per pulse set in the fixed parameter in the real mode.

(4) Switching the stroke amount and cam No. during operation

(a) The cam stroke amount and execute cam No. can be changed using the Motion SFC program during cam operation.

(b) The stroke amount and cam No. are changed by the address set in the "stroke amount, cam No. change point" at the creating cam data.
When the "stroke amount, cam No. change point" is passed, the stroke amount/cam No. is changed based on the value of the stroke amount setting device and cam No. setting device set in the cam parameters.

< Example > Switching between cam No.1 and No.2, and switching timing between stroke amount I_1 and I_2 when the stroke amount/cam No. change point is set as "0".

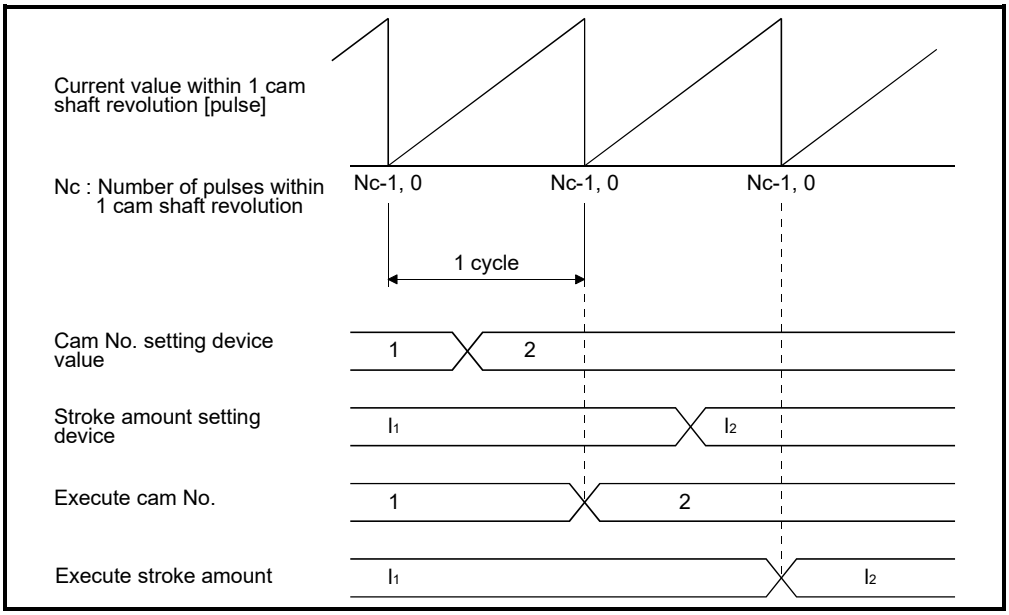

(c) Error causes at the changing stroke amount/cam No. during operation

1) The cam No. and stroke amount are always input at the switching from real mode to virtual mode and in the virtual mode.
A relative check is executed at the time of input. An error occurs in the following cases, the error detection signal (M2407+20n) turns on and the error code is stored in the minor error code storage register.
• The stroke amount is outside the range of 1 to 2147483647 (2^{31}-1). "Lower stroke limit value + Stroke amount" ≤ "2147483647 (2^{31}-1)" is not satisfied in the two-way cam mode.
• The control mode of cam No. is not same.

2) Processing for the cam No./stroke amount error
• If the error occurs at switching from the real mode to virtual mode, it does not switch to the virtual mode.
• If the error occurs at reaching the preset "stroke amount, cam No. change point" (during cam operation), operation continues without switching to the preset stroke amount/cam No.
Reset the error detection signal and minor error code storage register by the error reset command (M3207+20n).

3) Processing for the error
a) If the error occurs at switching from the real mode to virtual mode, correct by the following procedure.
• Turn the real mode/virtual mode switching request flag (M2043) off.
• Correct the cam No. and stroke amount.
• Turn the real mode/virtual mode switching request flag on, and switch to virtual mode.
b) If the error occurs during cam operation, correct the cam No. and stroke amount.

(5) Control details

(a) The cam feed current value is continued at switching from the real mode to virtual mode/from the virtual mode to real mode.

(b) Backlash compensation processing is continued with the settings value of fixed parameters, even if switches the real mode/virtual mode.

(c) Upper/lower stroke limit value and speed limit value are not checked.

(6) Control change

The current value within 1 cam shaft revolution can be changed to optional value for the cam as the control change during the virtual mode operation.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details of current value change.

Motion SFC program for which executes the current value change (CHGA-C) is shown below.

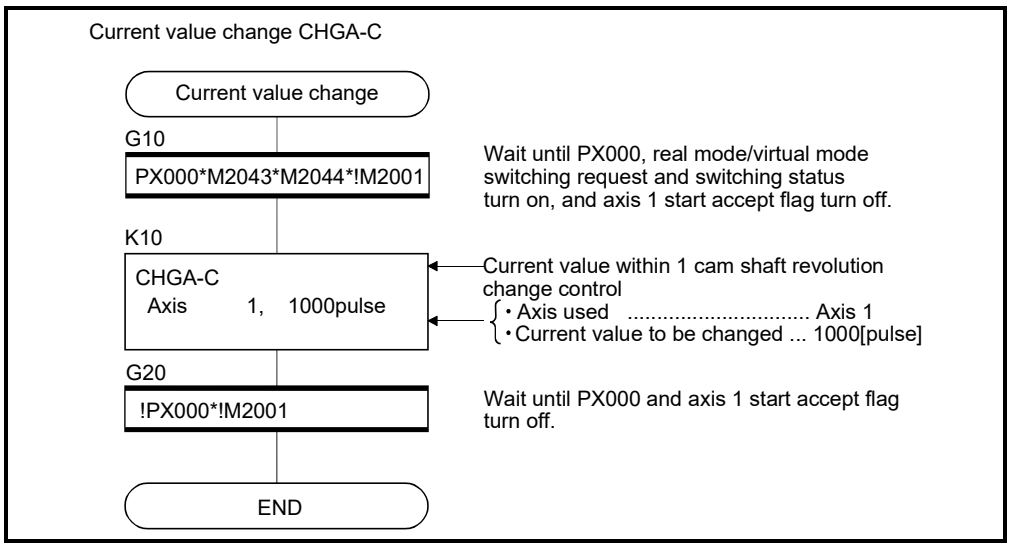

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

[Operation]

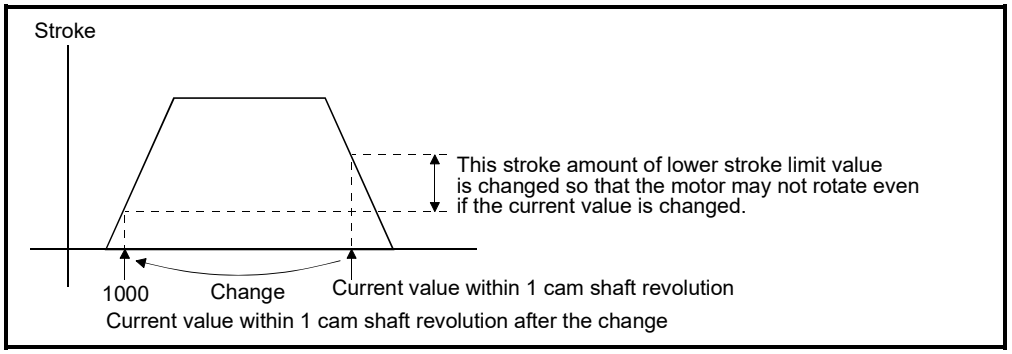

(7) Program example

[Switching real mode/virtual mode]

Motion SFC program for switching real mode/virtual mode is shown below.

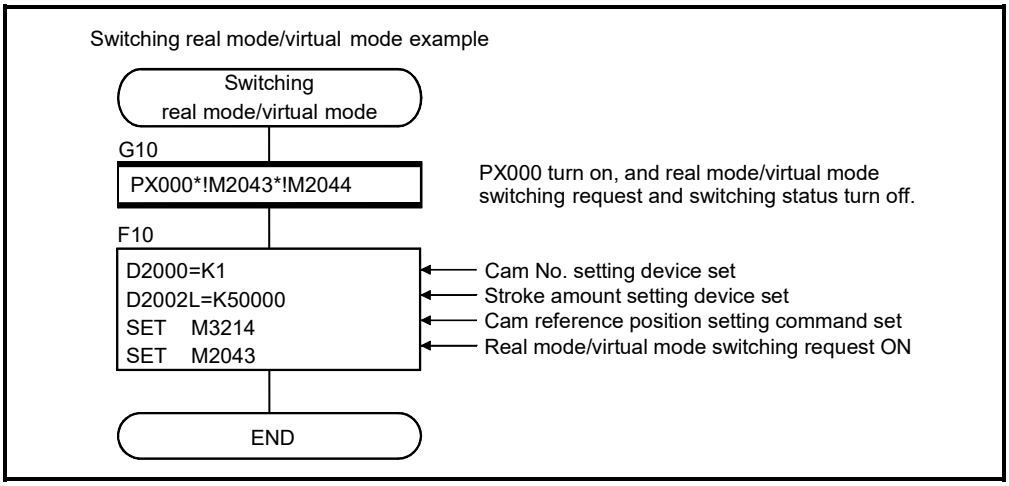

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

[Switching cam No./stroke amount during operation]

Motion SFC program for switching cam No. or stroke amount is shown below.

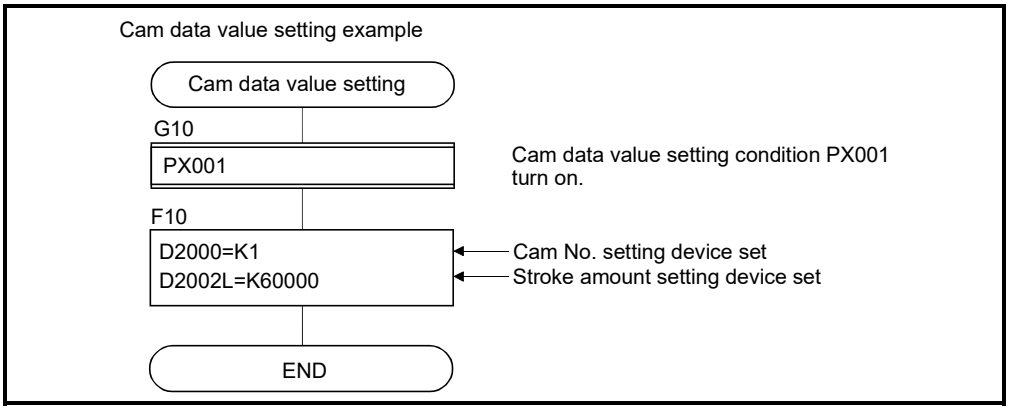

(Note): Example of the above Motion SFC program is started using the automatic start or sequence program.

8.4.2 Settings items at cam data creating

This section describes the setting items at cam data creating using MT Developer2.

Table 8.4 Table of Settings Items at cam Data Creating

No.	Setting item	Default	Setting range
1	Cam No.	—	Refer to (1)
2	Resolution	256	256, 512, 1024, 2048
3	Stroke amount/ Cam No. change point	0	0 to (resolution-1)
4	Operation mode	Two-way cam mode	• Two-way cam mode • Feed cam mode
5	Cam data table	0	0 to 32767

(1) Cam No.

This device is used to set the number allocated in created cam data.
The number of cam data is set "1 to 64" for each machine.
A cam No. is used with the number which offset value attached by the machine name sequence registered on mechanical system editing screen in the mechanical system program.

Machine name sequence	Setting cam No.
1	1 to 64
2	101 to 164
3	201 to 264
4	301 to 364

(2) Resolution

(a) This device is used to set the number of index divisions in one cam cycle.

(b) The following conditions need to be satisfied in order to output the all point data of resolution correctly.
- Number of pulses per cam revolution (Nc) ≥ Resolution
- Time required per cam revolution ≥ Operation cycle × Resolution

(3) Stroke amount/cam No. change point

(a) This device is used to set a position at which the stroke amount/cam No. is switched during operation.

(b) When the set switching position [range: 0 to (resolution -1)] is reached, if the stroke amount/cam No. is normal, it is switched to the setting stroke amount and cam No.

(4) Operation mode

(a) This device is used to set the two-way cam mode/feed cam mode.

1) Two-way cam mode ..... A two-way operation is repeated between the lower stroke limit value (lower dead point) and the range set in the stroke amount.

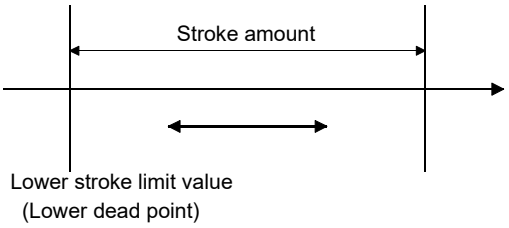

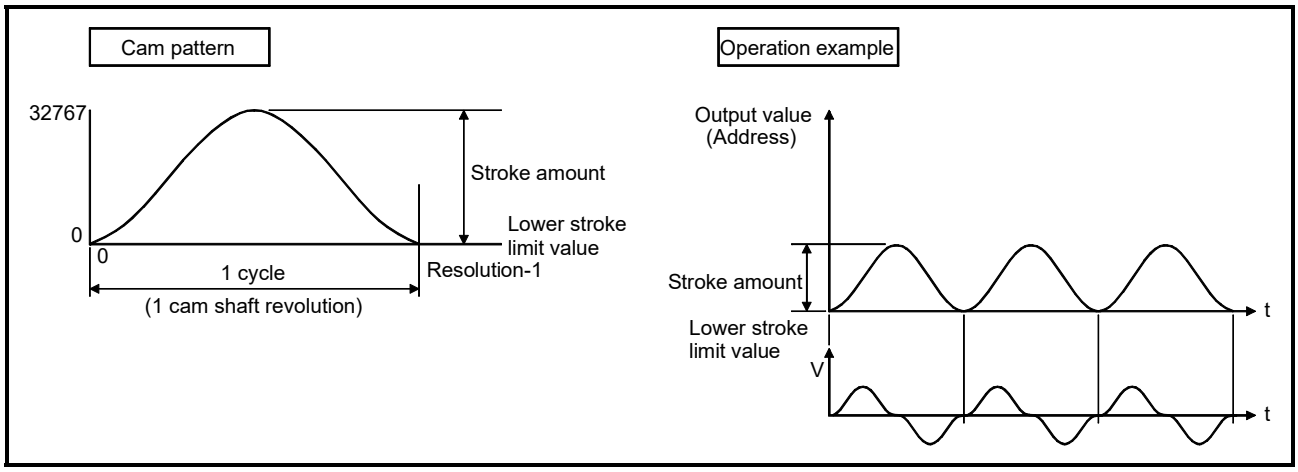

2) Feed cam mode .....With the lower stroke limit value (lower dead point) as the operation start position, positioning is executed by feeding one stroke amount per cycle in a fixed direction.

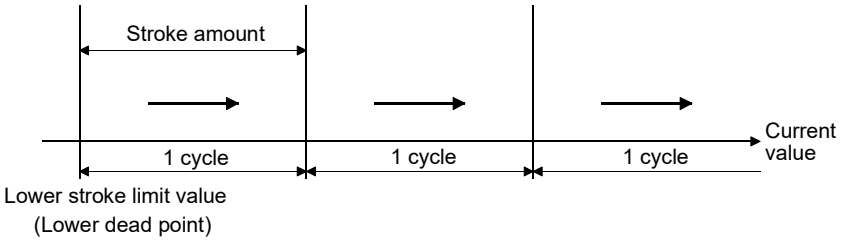

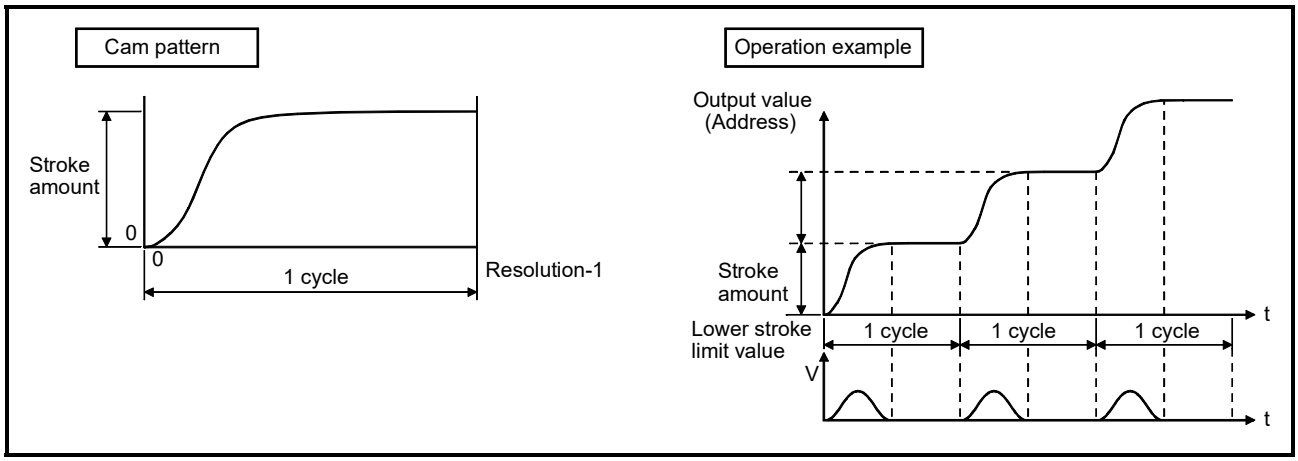

(5) Cam data table

(a) This device is used to set each point stroke ratio (when the stroke amount is divided into 32767 divisions) in the set resolution.

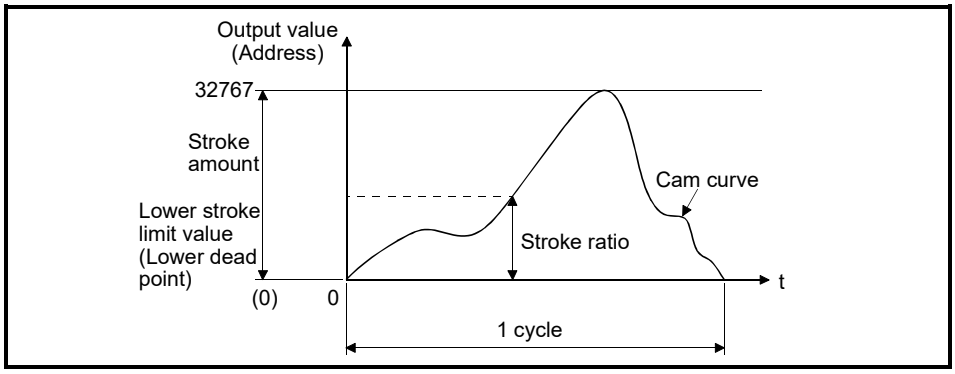

(b) The cam data table is automatically created by creating the cam curve using MT Developer2.
The cam curves which can be used in the Motion CPU are shown in Section 8.4.4.

8.4.3 Parameter list

The cam parameters are shown in Table 8.5 and the parameters No.2 to No.12 shown in this table are explained in items (1) to (11) below.
Refer to the help of MT Developer2 for the cam parameter setting method.

Table 8.5 Cam Parameter List

No.	Setting item	Default value	Setting range
1	Output axis No.	0	Q173DSCPU/Q173DCPU(-S1): 1 to 32 Q172DSCPU : 1 to 16 Q172DCPU(-S1) : 1 to 8
2	Number of pulses per cam shaft revolution (Nc) (2 words)	0	1 to 1073741824 [pulse]/ Word device (D, W, #, U□\G) ODS
3	Cam No. setting device (1 word)	—	Word device (D, W, #, U□\G)
4	Permissible droop pulse value	6553500	1 to 1073741824 [pulse]
5	Output unit	mm	mm / inch / degree ODS / pulse
6	Stroke amount setting device (2 words)	—	Word device (D, W, #, U□\G)
7	Torque limit value setting device (1 word)	—	-(300[%]) / word device (D, W, #, U□\G)
8	Comment	None	32 characters
9	Lower stroke limit value storage device (2 words)	—	- / word device (D, W, #, U□\G)
10	Current value within 1 virtual axis revolution storage device (Main shaft side, 2 words)	—	- / word device (D, W, #, U□\G)
11	Current value within 1 virtual axis revolution storage device (Auxiliary input axis side, 2 words)	—	- / word device (D, W, #, U□\G)
12	Cam/ball screw switching command device	—	- / bit device (Note-1)

(Note-1): The devices set in other parameter cannot be used.

(1) Number of pulses per cam shaft revolution (Nc) (2 word)

(a) The number of pulses required to rotate the cam one cycle is set.

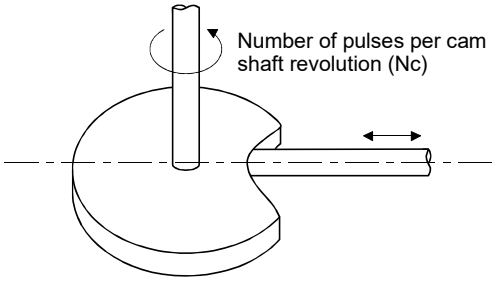

(b) The setting for the number of pulses per cam shaft revolution is not related to the travel value per pulse (fixed parameter setting).

(c) Set cam reference position after setting the number of pulses per cam shaft revolution. If not setting, the positioning is executed at the position before change.

(d) The following devices can be set as the number of pulses per cam shaft revolution. QDS

Name	Setting range (Note--1)
Data register	D0 to D8191 (Note--2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(2) Cam No. setting device (1 word)

(a) This device is used to set the device that sets in the Motion SFC program by which the cam No. to control.

(b) The following devices can be set as the cam No. setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) When the cam No. setting device value is changed during operation, it changes to the cam No. changed in the "stroke amount/cam No. switching position" set at the cam creating.

(3) Permissible droop pulse value

(a) This device is used to set the permissible droop pulse value of deviation counter.

(b) The deviation counter value is continually checked, and if it becomes larger than the permissible droop pulse value, the error detection signal (M2407+20n) turns on.
However, since the cam shaft operation continues, execute the error processing by user side.

(4) Output unit

(a) This device is used to set the unit ([mm]/[inch]/[degree]QDS/[pulse]) of cam.

(b) Set the same unit as used in the real mode (unit in the fixed parameters) for the cam shaft.

(5) Stroke amount setting device (2 words)

(a) This device is used to set the cam stroke amount.

(b) The following devices can be set as the stroke amount setting device.

Name	Setting range (Note--1)
Data register	D0 to D8191 (Note--2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) Set the stroke amount within the following range.

• Setting range in the two-way cam mode

Unit	Setting range
mm	Lower stroke limit value + Stroke amount ≤ 2147483647×10^{-1} [μm]
inch	Lower stroke limit value + Stroke amount ≤ 2147483647×10^{-5} [inch]
degree QDS	Lower stroke limit value + Stroke amount ≤ 2147483647×10^{-5} [degree]
pulse	Lower stroke limit value + Stroke amount ≤ 2147483647 [pulse]

• Setting range in the feed cam mode

Unit	Setting range
mm	0 < Stroke amount ≤ 2147483647×10^{-1} [μm]
inch	0 < Stroke amount ≤ 2147483647×10^{-5} [inch]
degree QDS	0 < Stroke amount ≤ 2147483647×10^{-5} [degree]
pulse	0 < Stroke amount ≤ 2147483647 [pulse]

POINT

When the cam reference position setting command (M3214+20n) is OFF, a position of cam axis is restored in the range of 0 to 359.99999[degree]. If the cam stroke amount is lager than 360.00000[degree], the current value within 1 cam shaft revolution different from the previous virtual mode might be restored.

(Example) When cam position is restored by switching to virtual mode in the following conditions, the current value within 1 cam shaft revolution corresponding to "current feed value: 80[degree]" is restored.

- Stroke amount : 720[degree]
- Lower stroke limit value : 0[degree]
- Current value : Lower stroke limit value + 440[degree] (Current feed value: 80[degree])

(6) Torque limit value setting device (1 word)

(a) This device is used to set the torque limit value for cam shaft.
When the device is set, the torque control is executed with the preset device value.
In the virtual mode, the torque limit setting is always valid.
If the device is not set, the torque limit is set at 300[%].

(b) The following devices can be set as the torque limit value setting device.

Name	Setting range
Data register	D0 to D8191 (Note-1)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-2)

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The setting range for torque limit value is 1 to 1000[%].

(7) Comment

(a) This device is used to create a comment such as purpose of cam shaft.
Made comment can be displayed at monitoring using MT Developer2.

(b) Comments up to 32 characters long can be created.

(8) Lower stroke limit value storage device (2 words)

(a) This device is used to store the cam lower stroke limit value.
The current lower stroke limit value is stored.

(b) The following devices can be set as the lower stroke limit value storage device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3), (Note-4)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of the virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. The unused areas of the virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): Only device of the self CPU can be used.

(c) The lower stroke limit value is range of -2147483648 (-2^{31}) to 2147483647 (2^{31}-1).

• The lower stroke limit value is determined as follows for each unit setting.

Unit	Setting range
mm	Lower stroke limit value$\times 10^{-1}$ [μm]
inch	Lower stroke limit value$\times 10^{-5}$ [inch]
degree QDS	Lower stroke limit value$\times 10^{-5}$ [degree]
pulse	Lower stroke limit value $\times 1$ [pulse]

(9) Current value within 1 virtual axis revolution storage device (Main shaft side) (2 words)

This parameter is set when the address mode clutch is set at the cam main shaft side.

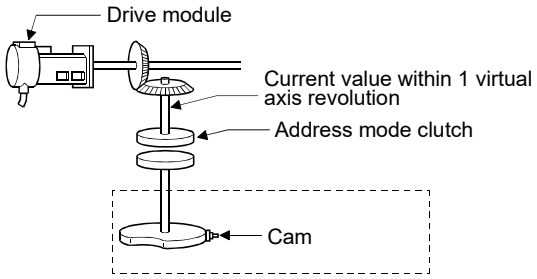

Current value within 1 virtual axis revolution
= (Drive module travel value × gear) %Nc
(% : Remainder operator)

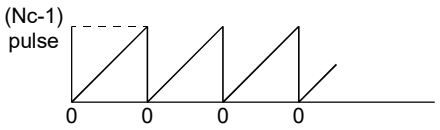

(a) The current value within 1 virtual axis revolution of cam main shaft side is stored in the preset device.

(b) The following devices can be set as the current value within 1 virtual axis revolution storage device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3), (Note-4)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of the virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. The unused areas of the virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): Only device of the self CPU can be used.

(c) The current value within 1 virtual axis revolution is the range of 0 to (Nc-1) [pulse].
(Nc: Number of pulses per cam shaft revolution)

(d) The address mode clutch is turned on/off with the specified address of the current value within 1 virtual axis revolution range of 0 to (Nc-1) [pulse]. Therefore, set the address value within the range of 0 to (Nc-1) [pulse] in the clutch ON/OFF address setting device.

(e) The current value within 1 virtual axis revolution reference position "0" is set by turning the address clutch reference setting command (M3213+20n) on and switching to the virtual mode.
The current values within 1 virtual axis revolution for both the main shaft and the auxiliary input axis is set to "0" at this time.
If the address clutch reference setting command (M3213+20n) is turned off and it switches to the virtual mode, the following processing is executed depending on the drive module.
- If the drive module is a virtual servo motor or an incremental synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis in the previous virtual mode.
- If the drive module is an absolute synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis calculated from the current value of synchronous encoder.

(f) An example of an address mode clutch operation is shown below.

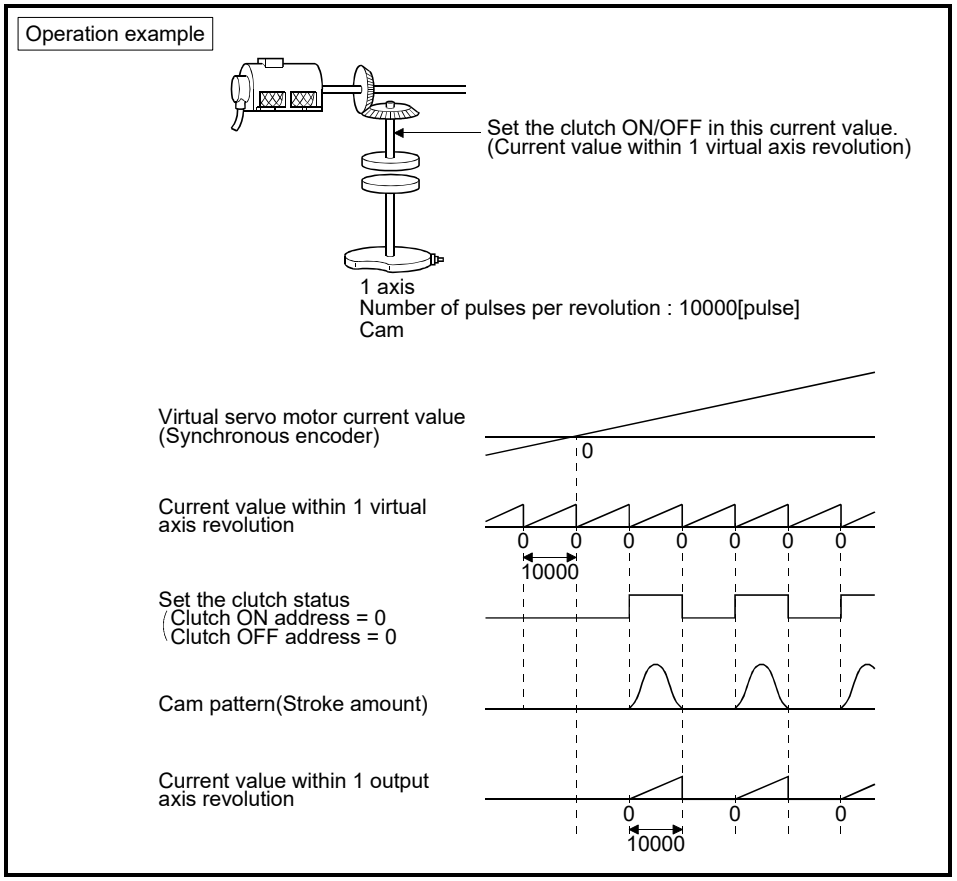

(10) Current value within 1 virtual axis revolution storage device (Auxiliary input axis side) (2 words)

This parameter is set when the address mode clutch is set at the cam auxiliary input axis side.

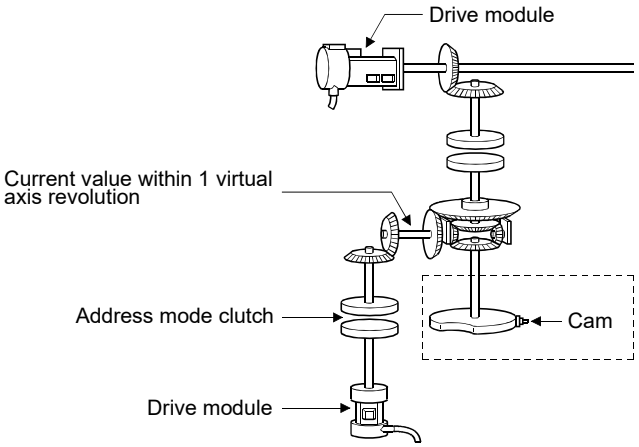

(a) By setting the current value within 1 virtual axis revolution of auxiliary input axis side, for the current value within 1 virtual axis revolution is stored in the preset device.

$$\text{Current value within 1 virtual axis revolution of auxiliary input axis side} = \text{Drive module travel value of auxiliary input axis side} \times \frac{\text{Gear ratio}}{\text{Number of pulses per cam revolution}}$$

(Note): Current value within 1 virtual axis revolution of auxiliary input axis side is updated regardless of clutch ON/OFF.

(b) The following devices can be set as the current value within 1 virtual axis revolution storage device.

Name	Setting range (Note-1)
Data register	D0 to D8191 (Note-2)
Link register	W0 to W1FFF
Motion register	#0 to #7999
Multiple CPU area device	U□\G10000 to U□\G(10000+p-1) (Note-3), (Note-4)

(Note-1): Set an even number at the first device.
(Note-2): D800 to D1559 are dedicated devices of the virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode. The unused areas of the virtual servo motor axis and cam axis can be used as a user device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): Only device of the self CPU can be used.

(c) The current value within 1 virtual axis revolution is the range of 0 to (NC-1) [pulse].

(d) The address mode clutch is turned on/off with the specified address of the current value within 1 virtual axis revolution range of 0 to (NC-1) [pulse]. Therefore, set the address value within the range of 0 to (NC-1) [pulse] in the clutch ON/OFF address setting device.

(e) The current value within 1 virtual axis revolution reference position "0" is set by turning the address clutch reference setting command (M3213+20n) on and switching to the virtual mode.
The current values within 1 virtual axis revolution for both the main shaft and the auxiliary input axis is set to "0" at this time.
If the address clutch reference setting command (M3213+20n) is turned off and it switches to the virtual mode, the following processing is executed depending on the drive module.
- If the drive module is a virtual servo motor or an incremental synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis in the previous virtual mode.
- If the drive module is an absolute synchronous encoder, operation will be continued from the current value within 1 virtual axis revolution for the main shaft and auxiliary input axis calculated from the current value of synchronous encoder.

(f) An example of an address mode clutch operation is shown below.

Operation example

Main shaft side clutch OFF

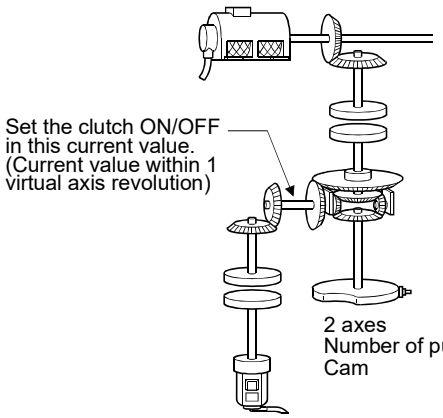

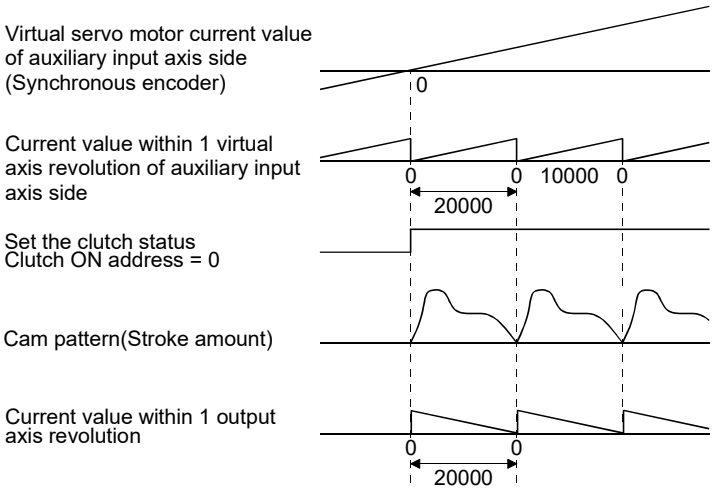

(Note): The rotation of output axis is reversed by differential gear.

(11) Cam/ball screw switching command device

(a) This parameter is used to set cam operation.

(b) The following devices can be used as the cam/ball screw switching command device.

Name	Setting range
Input	X0 to X1FFF (Note-1)
Output	Y0 to Y1FFF
Internal relay	M0 to M8191 (Note-2), (Note-3)
Link relay	B0 to B1FFF
Annunciator	F0 to F2047
Multiple CPU area device	U□\G10000.0 to U□\G(10000+p-1).F (Note-4)

(Note-1): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

(Note-2): "M4000 to M4639 and M4800 to M5439" are the dedicated devices of virtual servo motor axis in the virtual mode.
Unused area of virtual servo motor axis can be used as a user side.

(Note-3): Use these parameters to use the device (M5488 to M5519) allocated to Q17□CPUN/Q17□HCPU.

(Note-4): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(c) The following operation is executed depending on the setting unit by turning the cam/ball screw switching command on corresponding to each output axis No.

mm : Same operation as ball screw.
inch : Same operation as ball screw.
degree : Same operation as rotary table. QDS
pulse : Same operation as ball screw.

(d) Operation of output axis by cam/ball screw switching command is shown below.

Items	Operation details
Cam/ball screw switching command : OFF	Specified cam pattern operation
Cam/ball screw switching command : ON	• Unit: mm, inch, pulse Same operation as ball screw. • Unit: degree QDS Same operation as rotary table. Command to servo amplifier = Preset command to servo amplifier + Drive module travel value[pulse] × Gear ratio (Note): Feed current value is calculated based on the travel value per pulse set in the fixed parameter.

(e) The current value within 1 cam shaft revolution is calculated based on the feed current value, lower stroke limit value, stroke amount and cam No. (cam pattern) by turning off the cam/ball screw switching command.
If the cam/ball screw switching command is turned off outside the range of "lower stroke limit value to stroke amount" for cam, a minor error (error code: 5000) will occur.

(f) "Continue Virtual Mode" is set for operation on servo error, if the feed current value of output axis is outside the range of cam operation ("Lower stroke limit value to Stroke amount") by servo error for two-way cam, return the output axis to within cam operation range.

1) Remove servo error cause.

↓

2) Turn the cam/ball screw switching command ON.

↓

3) Execute the servo error reset (M3208+20n).

↓

4) Return the output axis position within cam operation range to within stroke range by JOG operation, etc.

↓

5) Turn the cam/ball screw switching command OFF.

↓

6) Re-start virtual mode.

8.4.4 Cam curve list

This section describes the cam curves which can be used in the virtual mode.

(1) Cam curve characteristics comparison
The cam curve characteristics comparison is shown below.

Table 8.6 Cam Curve Characteristics Comparison Table

Class		Cam curve name	Acceleration curve shape	Vm	Am	(A • V)m	(V • V)m	(S • V)m	Remark
Discontinuity curves		Constant - speed		1.00			1.00	1.00	
		Constant-acceleration		2.00	± 4.00	± 8.00	4.00	1.09	
Two-dwelling curve	Symmetrical curves	5^{th} curve		1.88	± 5.77	± 6.69	3.52	1.19	
		Cycloid		2.00	± 6.28	± 8.16	4.00	1.26	
		Distorted trapezoid		2.00	± 4.89	± 8.09	4.00	1.20	Ta = 1 / 8
		Distorted sine		1.76	± 5.53	± 5.46	3.10	1.13	Ta = 1 / 8
		Distorted constant-speed		1.28	± 8.01	± 5.73	1.63	1.07	Ta = 1 / 16 Ta = 1 / 4
	Asymmetrical curves	Trapecloid		2.18	± 6.17	± 10.84	4.76	1.28	m = 1
		Reverse trapecloid		2.18	± 6.17	± 10.84	4.76	1.28	m = 1
One-dwelling curve		Double hypotenuse		2.04	+ 5.55 - 9.87	+ 7.75 - 9.89	4.16	1.39	
Non-dwelling curve		Single hypotenuse		1.57	± 4.93	± 3.88	2.47	1.02	

(2) Free-form curve
The spline interpolation function can be used to create free-form cam curves.

8.5 Phase Compensation Function

When carrying out a position follow-up control (synchronous operation) by synchronous encoder, delays in the progresses, etc. cause the phase to deviate at servo motor shaft end in respect to the synchronous encoder. The phase compensation function compensates in this case so that the phase does not deviate.

(1) Parameter list

Set the following devices for axes to execute the phase compensation function. (Set in the output module parameter.)

Table 8.7 Phase Compensation Function Parameter List

No.	Item	Number of device words	Device setting range	Setting range
1	Phase advance time	2	D0 to D8191 (Note-1), (Note-2) W0 to W1FFF (Note-2) U□\G10000 to U□\G(10000+p-1) (Note-2) , (Note-3)	-2147483648 to 2147483647[μs]
2	Phase compensation time constant	1	D0 to D8191 (Note-1) W0 to W1FFF U□\G10000 to U□\G(10000+p-1) (Note-3)	0 to 32767[times]
3	Phase compensation processing valid flag	Bit	X0 to X1FFF (Note-4) Y0 to Y1FFF M0 to M8191 (Note-5) F0 to F2047 B0 to B1FFF U□\G10000.0 to U□\G(10000+p-1).F (Note-3)	—
4	Compensation amount monitor device	2	D0 to D8191 (Note-1), (Note-2) W0 to W1FFF (Note-2) U□\G10000 to U□\G(10000+p-1) (Note-2), (Note-3), (Note-6)	—

(Note-1): D800 to D1559 are dedicated devices of virtual servo motor axis, synchronous encoder axis and output module "Cam" in the virtual mode.
Unused areas of virtual servo motor axis and cam axis can be used as a user device.
(Note-2): Set an even number at the first device.
(Note-3): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.
(Note-4): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS
(Note-5): "M4000 to M4639 and M4800 to M5439" are the dedicated devices of virtual servo motor axis in the virtual mode.
Unused area of virtual servo motor axis can be used as a user side.
(Note-6): Only device of the self CPU can be used.

(a) Phase advance time

It is used to set whether a phase is advanced/delayed.

Phase advance time is calculated in the formula below.

Phase advance time = Delay time peculiar to system [s] + 1/PG1 [rad/s]

(Delay time peculiar to system [t] : Refer to Table 8.8
: Model control gain)

"Command speed[pulse/s] × Phase advance time[s]" is added to the servo command value as an amount of compensation.

Table 8.8 Delay time peculiar to system

Operation cycle [ms]	Incremental synchronous encoder use [μs]	Q171ENC-W8/Q170ENC use [μs]
0.22 QDS	681	612
0.44	1088	1271
0.88	2376	2611
1.77	4165	4388
3.55	7715	7943
7.11	18378	18608
14.2 QD	32613	32829

(b) Phase compensation time constant

It is used to set to execute leading edge/trailing edge smoothly so that a servo motor does not make rapid acceleration/deceleration at phase compensation.

Set the number of operation cycles as setting unit.

<Example>

For operation cycle is 0.88[ms] and phase compensation time constant is 50[times].

The phase compensation time constant becomes "0.88 × 50 = 44[ms] "

Phase compensation time constant is input at the phase compensation processing valid flag ON.

(c) Phase compensation processing valid flag

It is used to set whether the phase compensation function is "Valid/Invalid".

• ON……Phase compensation function "Valid"

• OFF…. Phase compensation function "Invalid"

(d) Compensation amount monitor

The compensation amount under compensating is stored to the preset register.

• Except cam axis…Compensation amount of servo motor shaft [pulse]

• Cam axis……Compensation amount of current value within 1 virtual axis revolution [pulse]

(2) Operating method

Operating method for phase compensation function is shown below.

(a) Set a phase advance time.

↓

(b) Set a suitable time constant as a phase compensation time constant.

↓

(c) Turn the phase compensation processing valid flag on for every axis before the servo motor start.

↓

(d) For cam axis, make a gain adjustment in the servo amplifier side to improve the flattery for cam pattern. In this case, advance to the phase of cam axis compared with axis of other roller or rotary table, etc.
Therefore, if the phase of cam axis is delayed in the phase advance time setting, a phase with the axis of a roller or rotation table, etc. can be set.

(3) Errors at phase compensation

(a) When the phase compensation time constant is outside the setting range, a minor error [6300] will occur for applicable axis, a phase compensation is executed without soothing processing.

POINT

(1) It must be reduced a phase compensation time constant to use for delay compensation of synchronous encoder.

(2) When driving 2 axes synchronizing with virtual servo motor, even if the position control gains 1 of each axis differ, it can be compensated to eliminate a phase discrepancy by the following setting.
<Example>
For Axis 1: PG1= 50[rad/s] and Axis 2: PG1=100[rad/s],
Phase advance time = 1/50 – 1/100
= 0.01[s] (=10000[μs])
Therefore, -10000[μs] is set as a phase advance time of axis 2, a phase of axis 2 can be set with a phase of axis 1.

(3) For cam axis, if it switches from the virtual mode to real mode in compensation amount except "0", it switches to the real mode with a phase shifted to other axes for compensation amount of remainder. In this case, switch to the real mode after setting "0" as a compensation amount.

9. REAL MODE/VIRTUAL MODE SWITCHING AND STOP/RE-START

This section describes the check details and switching method for the real mode/virtual mode switching.

(1) Real mode/virtual mode switching
Real mode/virtual mode switching is executed by turning the real mode/virtual mode switching request flag (M2043) ON/OFF.
• Real mode ..... Switching request to the real mode by turning the M2043 OFF.
• Virtual mode ..... Switching request to the virtual mode by turning the M2043 ON.

(2) Real mode/virtual mode confirmation
The current control mode state (real or virtual) can be confirmed by turning the real mode/virtual mode switching status flag (M2044) ON/OFF.
• M2044 : OFF ..... Real mode state
• M2044 : ON ..... Virtual mode state

9.1 Switching from the Real Mode to Virtual Mode

When the real mode to virtual mode switching is requested (M2043 OFF→ON), the following check is executed. (Confirm the check items in Table 9.1 to 9.3 for switching from real mode to virtual mode, and execute with all normal state.)
• Check to determine if switching to the virtual mode is possible.... Refer to Table 9.1
• Output module check ..... Refer to Table 9.2
• Synchronous encoder axis check ..... Refer to Table 9.3

(1) Check to determine if switching to the virtual mode is possible

(a) The items in Table 9.1 are checked to determine if switching to the virtual mode is possible.
When all check items of Table 9.1 are normal, switching to the virtual mode is executed.

(b) If an error of at least one item of Table 9.1, the real mode/virtual mode switching error detection flag (M2045) turns on, and the error code is stored in the real mode/virtual mode switching error information storage register (SD504 to SD506).
Refer to APPENDIX 1.7 for the error codes which are stored in the SD504 to SD506.

Table 9.1 Check Items List for Real Mode to Virtual Mode Switching

Check sequence	Check item	Applicable output module					Normal condition	Abnormal condition
		Roller	Ball screw	Rotary table	Cam	Real mode axis (Note-1)		
1	• Are PLC ready flag (M2000) and PCPU READY complete flag (SM500) ON ?	○	○	○	○	○	ON	OFF
2	• Have all axes stopped ? (M2001 to M2032 : OFF)	○	○	○	○	○	YES	NO
3	• Has cam data using the Motion SFC program changed ?	–	–	–	○	–	NO	YES
4	• Has the mechanical system program been registered ?	○	○	○	○	○	YES	NO
	• Does the axis No. set in the system settings match the output axis set in the mechanical system program ?	○	○	○	○	○	YES	NO
5	• Is the all axes servo ON command (M2042) ON ?	○	○	○	○	○	ON	OFF
6	• Does not the servo start processing by the servo error reset executed at the servo amplifier (axis used) ?	○	○	○	○	○	Completion	During processing
7	• Is the external encoder normal ?	○	○	○	○	○	YES	NO
8	• Is the external forced stop inputted ?	○	○	○	○	○	NO	YES
9	• Are the all axes servo error detection signal (M2408+20n) ON ?	○	○	○	○	○	OFF	ON even if 1 axis
10	• Are the home position return request flag (M2409+20n) OFF ? (Excluding roller axis)	–	○	○	○	–	OFF	ON even if 1 axis
11	• Does the units set in the fixed parameters match that set in the output module ?	–	○	○	○	–	YES	NO
12	• Has the cam data been registered?	–	–	–	○	–	YES	NO
13	• Has the cam No. been set at the "cam No. setting device" set in the cam parameter ?	–	–	–	○	–	YES	NO
14	• Has the stroke amount (1 to 2147483647) been set at the "stroke amount setting device" set in the cam parameter ?	–	–	–	○	–	YES	NO
15	• Is the cam "stroke amount setting device" an even number ?	–	–	–	○	–	YES	NO

(Note-1): It is not check target for the operating system software version "00H or later".

(2) Output module check

(a) The items in Table 9.2 below are checked to determine the output module state.
If an error is detected, it switches to the virtual mode, but the applicable system cannot be started. Correct the error cause in the real mode, and switch to virtual mode again.

(b) When an error is detected, the error detection signal (M2407+20n) of applicable output module turns on, and the error code is stored in the minor/major error code storage register.

Table 9.2 Check Items List for Output Module

Check sequence	Check item	Applicable output module				Normal condition	Abnormal condition
		Roller	Ball screw	Rotary table	Cam		
1	• Is the feed current value within the stroke limit range ?	—	○	○	—	YES	NO
	• Is the feed current value within the range of "[lower stroke limit value] to [stroke amount]" ?	—	—	—	○		
2	• Does not "[lower stroke limit value] + [stroke amount]" exceed 2147483647 (2^{31}-1) in the two-way cam mode ?	—	—	—	○	YES	NO
3	• When the clutch connected to between the drive module and synchronous encoder is "external input mode", are the clutch ON/OFF device the same device ?	○	○	○	○	YES	NO
	• When the clutch connected to between the drive module and synchronous encoder is "external input mode", are the encoder I/F the manual pulse generator input ?	○	○	○	○	YES	NO (Serial encoder (ABS) input)
4	• Is the output module where either a "no clutch" or "clutch ON command" in effect for the virtual main shaft or the virtual auxiliary input axis the servo ready (M2415+20n : ON)?	○	○	○	○	ON	OFF
	• Is the external input signal "STOP" of output module where either a "no clutch" or "clutch ON command" in effect for the main shaft or the auxiliary input axis OFF ?	○	○	○	○	OFF	ON
5	• Can the current value within 1 cam revolution be calculated in the two-way cam mode ?	—	—	—	○	YES	NO
6	• Is the clutch ON/ OFF address setting device for address mode clutch an even number ?	○	○	○	○	YES	NO

(3) Synchronous encoder axis check

(a) The items in Table 9.3 below are checked to determine the synchronous encoder state.
If an error is detected, it switches to the virtual mode, but the applicable system cannot be started. Correct the error cause in the real mode, and switch to virtual mode again.

(b) When an error is detected, the error detection signal (M2407+20n) of the applicable output module turns on, and the error code is stored in the minor/major error code storage register.

Table 9.3 Check Items List for Synchronous Encoder Axis

Check sequence	Check item	Applicable synchronous encoder		Normal condition	Abnormal condition
		External synchronous encoder	Output module		
1	• Is the synchronous encoder connected to the Q172DEX ?	○	—	Connected	Not connected Cable break

9.2 Switching from the Virtual Mode to Real Mode

There are following methods for switching from the virtual mode to real mode.
- Switching by user
- Switching automatically by the operating system software

9.2.1 Switching by user

(1) When the virtual mode to real mode switching is requested (M2043 ON → OFF), the item in Table 9.4 is checked. If normal, it switches to the real mode. (Confirm the check items in Table 9.4 for the switching from virtual mode to real mode, and execute with all normal state.)

(2) The real mode/virtual mode switching error detection flag (M2045) turns on at the error detection, and the error code is stored in the real mode/virtual mode switching error information (SD504 to SD506). (Refer to APPENDIX 1.7)

Table 9.4 Check Items for VIRTUAL Mode to REAL Mode Switching

Check item	Normal condition	Abnormal condition
• Is the virtual axis stopped? (M2001 to M2032 of virtual axis: OFF)	Virtual axis OFF	Virtual axis ON even if 1 axis
• Virtual axis and real mode axis stopped? (M2001 to M2032 : OFF) (Operating system software version "00G" or before in the Q17□DCPU(-S1))	OFF	ON even if 1 axis

9.2.2 Switching by the operating system software

(1) If the following items are detected in the virtual mode operation, the operating system software automatically switches back to the real mode.
- The forced stop is input.
- PLC ready flag (M2000) turns off.
- When "Return to Real Mode" is set as an operation on servo error, the servo error detection signal (M2408+20n) turns on even if 1 axis.

(2) The error code is stored in the real mode/virtual mode switching error information (SD504 to SD506) at the switching back from virtual mode to real mode. However, the real mode/virtual mode switching error detection flag (M2045) does not turn on.

9.2.3 Continuous operation on servo error in virtual mode

Set the processing on servo error in virtual mode on the mechanical system screen of MT Developer2.
(Default: "Return to real mode")
Refer to the help of MT Developer2 for the setting method.

• Mechanical system screen

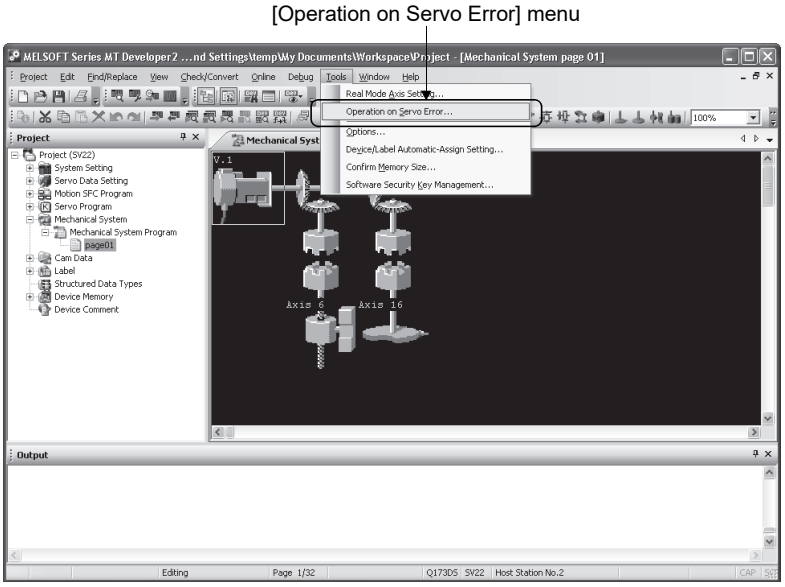

• Operation on servo error setting screen



Operation conditions for continuous operation on servo error in virtual mode are shown below.

Operation mode	Details	Operation on servo error	Operation for other axes	Return condition to virtual mode
Return to real mode	Motion CPU switches to real mode.	Only axis on servo error is servo OFF, and servo motor coasts.	Rapid stop	After error release in real mode
Continue virtual mode	Virtual mode continues.		Operation continues	After error release in virtual mode

POINT

When "Continue virtual mode" is selected, be sure to use a clutch in the mechanical system program.
In addition, the drive module connected to output axis on servo error is also continuing operation. Be sure to release a servo error after clutch OFF.

9.3 Precautions at Real Mode/Virtual Mode Switching

This section describes the precautions at real mode/virtual mode switching.

(1) The motion control step and the torque limit value change instruction/speed change instruction during mode switching processing execution impossible
The motion control step and the torque limit value change instruction/speed change instruction during the from real mode to virtual mode/from virtual mode to real mode switching processing (part of timing chart (Note-1)) cannot execute.
The real mode/virtual mode switching request flag (M2043) and real mode/virtual mode switching status flag (M2044) should be used as an interlock.

[Timing Chart]

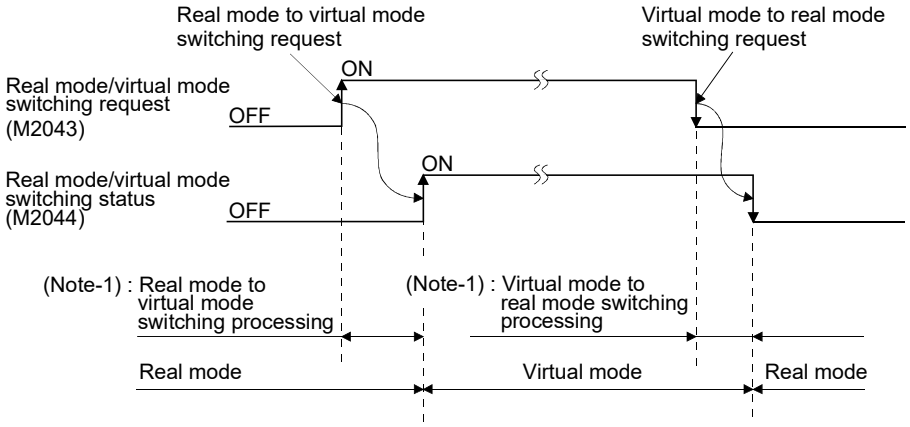

Motion SFC program for which executes the motion control step of real mode and virtual mode is shown below.

[Program Example]

(a) Motion control step in the virtual mode
Example of Motion SFC program is shown below.

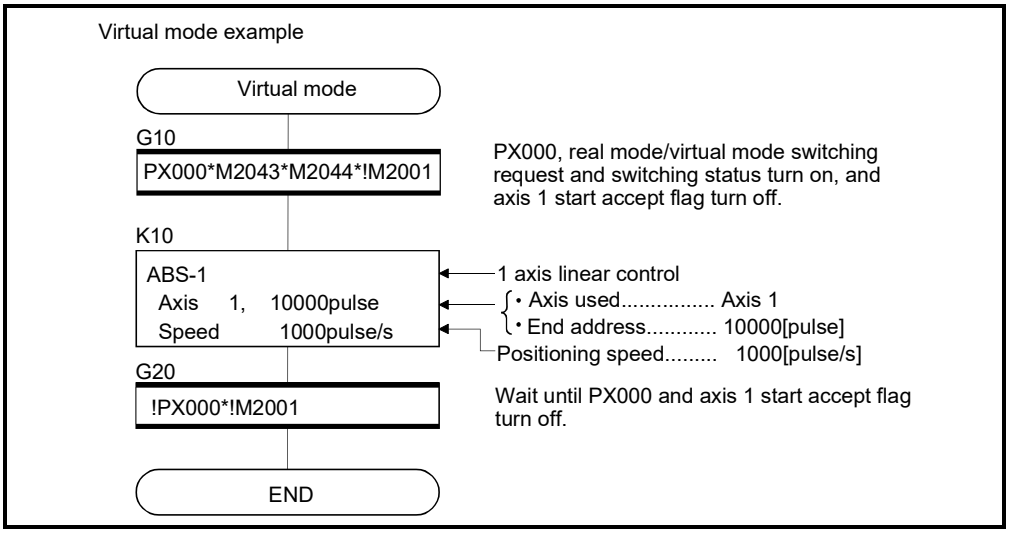

(Note) : Example of the above Motion SFC program is started using the automatic start or sequence program.

(b) Motion control step in the real mode
Example of Motion SFC program is shown below.

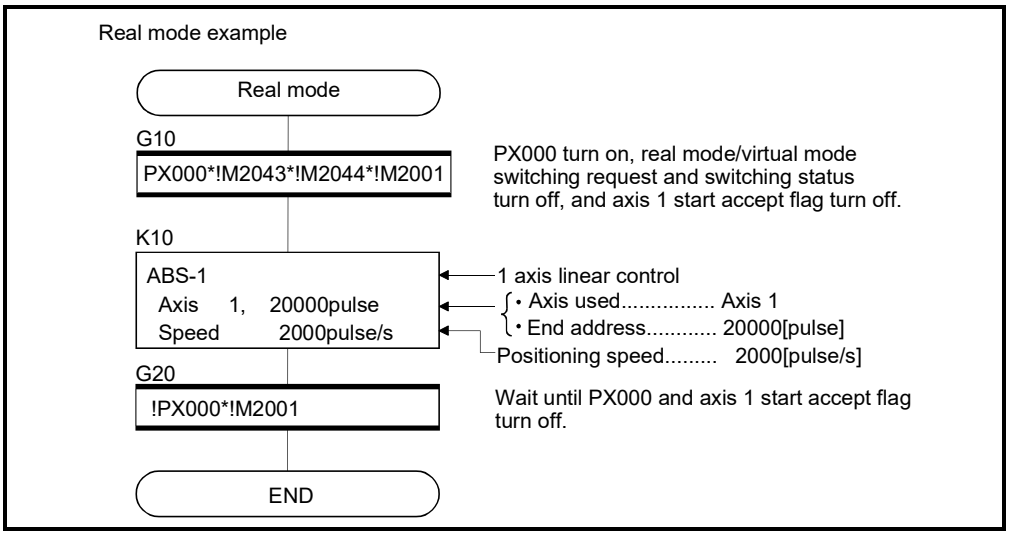

(Note) : Example of the above Motion SFC program is started using the automatic start or sequence program.

(2) M2043 processing during the TEST mode using MT Developer2
M2043 ON/OFF (Real mode/virtual mode switching request) is ignored during the test mode using MT Developer2.

Real mode/virtual mode switching can be executed using MT Developer2, during TEST mode operation using MT Developer2.
The real mode/virtual mode switching status flag (M2044) is turned off/on with the real mode/virtual mode.

REMARK

The same check as the "M2043 (OFF → ON/ON → OFF)" is also executed at the real mode/virtual mode switching using MT Developer2.
(Refer to Sections 9.1 and 9.2)

9.4 Stop and Re-start

The basic method for stopping the system (output module) in the virtual mode operation is to stop the main shaft. If an auxiliary input axis is used, also stop the auxiliary input axis.

(1) Virtual axis stop

The stop operation or causes of virtual axis, the stop processing and re-start after stop are shown below. The following three methods for the virtual servo motor axis stop processing. This processing is also valid for interpolation axes during the interpolation operation.

- Deceleration stop ..... Deceleration stop based on the "stop deceleration time" of parameter block.
- Rapid stop ..... Deceleration stop based on the "rapid stop deceleration time" of parameter block.
- Immediate stop ……. Immediate stop without deceleration.

Because the synchronous encoder axis becomes the input immediate stop, operation should be executed after the synchronous encoder axis has been stopped from the external input, except for abnormal stops such as the forced stop or a servo error occurrence, etc.
(Example : M2000 is OFF, All axes servo OFF command, etc.)
(The servo error occurs by the immediate stop of output module connected to the synchronous encoder axis, and the synchronization discrepancy may occurs.)

When the synchronization discrepancy occurs by the stop cause, the synchronization discrepancy warning (M2046) turns on. In this case, re-align the axes in the real mode, turn M2046 off, then continue the virtual mode operation.

The stop operation/stop causes during operation and re-starting operation after stop are shown in the next page.

9.4.1 Stop operation/stop causes during operation and re-starting operation list

Table 9.5 Stop Operation/stop Causes during Operation and Re-starting Operation List

No.	Stop operation or stop causes during operation	Affected virtual axis			Stop processing		Return to Real mode by operating system software after all virtual axes stop completion	Synchronization discrepancy warning (M2046) set	
		Virtual servo motor axis	Synchronous encoder axis	All axes batch	Virtual servo motor axis	Synchronous encoder axis			
1	Stop command ON	○ (Applicable axis)	—	—	Deceleration stop	—	—	—	
2	Rapid stop command ON	○ (Applicable axis)	—	—	Rapid stop	—	—	—	
3	All-axes servo OFF command (M2042 OFF, Command using MT Developer2 in the TEST mode)	—	—	○	Deceleration stop	Immediate input stop (Note-1)	—	—	
4	PLC ready flag (M2000) OFF	—	—	○	Deceleration stop	Immediate input stop (Note-1)	○	—	
5	Motion CPU stop	—	—	○	Deceleration stop	Immediate input stop (Note-1)	○	—	
6	All-axes rapid stop from MT Developer2	—	—	○	Rapid stop	Immediate input stop (Note-1)	—	—	
7	Stop from MT Developer2 in the TEST mode	○ (All axes)	—	—	Deceleration stop	—	—	—	
8	Forced stop	—	—	○	Rapid stop	Immediate input stop (Note-1)	○	○	
9	Servo error at output module even if 1 axis	—	—	○	Rapid stop	Immediate input stop (Note-1)	○	○	
10	Motion CPU WDT error	—	—	○	Immediate stop	Immediate input stop	—	—	
11	Multiple CPU system reset	—	—	○	Immediate stop	Immediate input stop	—	—	
12	Multiple CPU system power OFF	—	—	○	Immediate stop	Immediate input stop	—	—	
13	Other errors during virtual axis operation	○	—	—	Deceleration stop	—	—	—	
14	Error detection at absolute synchronous encoder axis	—	○	—	—	Immediate input stop	—	—	

	Error set	Output module operation	Operation continuation enabled (○)/ disabled (×)	Re-start operation after stop
	—	• Deceleration stop based on the smoothing time constant.	○	• Continuous operation is possible by turning the stop command off (not necessary when on) and starting.
	—	• Deceleration stop based on the smoothing time constant.	○	• Continuous operation is possible by turning the stop command off (not necessary when on) and starting.
	—	• Servo OFF state after deceleration stop based on the smoothing time constant.	○	• Continuous operation is possible by turning the all clutch off ⟶ all axes servo on ⟶ clutch on. (However, when the servo motor does not operate during the servo OFF. Also, the clutch OFF/ON is switched as required by the user side.) • For synchronous encoder axes, switch to the real mode, then back to the virtual mode to resume inputs. (Note-1)
	Minor error (200) set (virtual axis)	• Deceleration stop based on the smoothing time constant.	○	• Operation is possible by executing the real mode to virtual mode switching request (M2043 ON), after turning the PLC ready flag (M2000) on.
	Minor error (200) set (virtual axis)	• Deceleration stop based on the smoothing time constant.	○	• Operation is possible by executing the real mode to virtual mode switching request (M2043 ON), after starting the Motion CPU.
	—	• Deceleration stop based on the smoothing time constant.	○	• Continuous operation is possible by starting after stop. • For synchronous encoder axes, switch to the real mode, then back to the virtual mode to resume inputs. (Note-1)
	—	• Deceleration stop based on the smoothing time constant.	○	• Continuous operation is possible by starting after stop.
	—	• Servo OFF state after immediate stop.	×	• Continuous operation is not possible due to a synchronization discrepancy between the virtual axis and output module, and stop. • After release the forced stop, re-align the output module in the real mode, switch the synchronization discrepancy warning (M2046) OFF, then switch back to the virtual mode to resume operation.
	Applicable output module (Servo error, Servo error code set)	• Servo OFF state after immediate stop for error axis only. • Operation is different according to the setting at error occurrence.	×	• After executing a servo error reset in the real mode, re-align the axes, switch the synchronization discrepancy warning (M2046) OFF, then switch back to the virtual mode to resume operation.
	SM512 (Motion CPU WDT error flag) ON	• Servo OFF state after immediate stop.	×	• Continuous operation is not possible due to a synchronization discrepancy between the virtual axis and output module, and stop. • After resetting the Multiple CPU system, re-align the output module, then switch to the virtual mode to resume operation.
	—	• Servo OFF state after immediate stop.	×	• Continuous operation is not possible due to a synchronization discrepancy between the virtual axis and output module, and stop. • After resetting the Multiple CPU system, re-align the output module, then switch to the virtual mode to resume operation.
	—	• Servo OFF state after immediate stop.	×	• Continuous operation is not possible due to a synchronization discrepancy between the virtual axis and output module, and stop. • After resetting the Multiple CPU system, re-align the output module, then switch to the virtual mode to resume operation.
	Applicable error set	• Deceleration stop based on the smoothing time constant.	○	• Operation is possible by release the error cause.
	Applicable error set	• Deceleration stop based on the smoothing time constant.	×	• Return to the real mode, re-align the axes, then switch to the virtual mode to resume operation.

(Note-1): It is input continuously for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

MEMO

10. AUXILIARY AND APPLIED FUNCTIONS

This section describes the auxiliary and applied functions for positioning control in the Multiple CPU system.

Items	Details	Applications
Mixed function of virtual mode/real mode	Positioning control for preset axis is executed during synchronous control/cam control in the mechanical system program.	It is used in the system for which conveys while executing synchronous control.

10.1 Mixed Function of Virtual Mode/Real Mode

When the output axis No. to execute positioning control directly is selected in the mixed function of virtual mode/real mode, a positioning control of axis which is not used in the mechanical system program can be executed simultaneously during the mechanical system program.
Example of program is shown below.

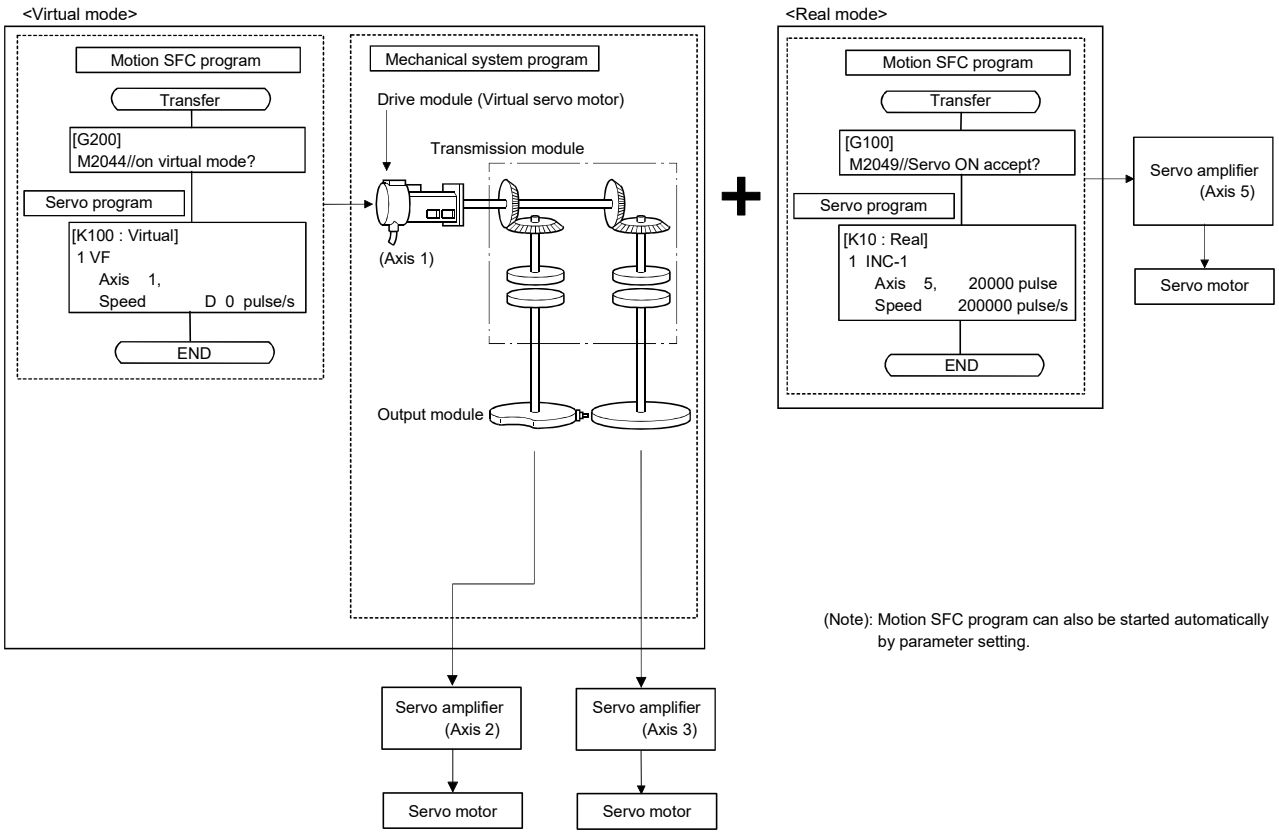

(Note): Motion SFC program can also be started automatically by parameter setting.

Set the axis to control as real mode axis on the mechanical system screen of MT Developer2.
Refer to the help of MT Developer2 for the setting method.

• Mechanical system screen

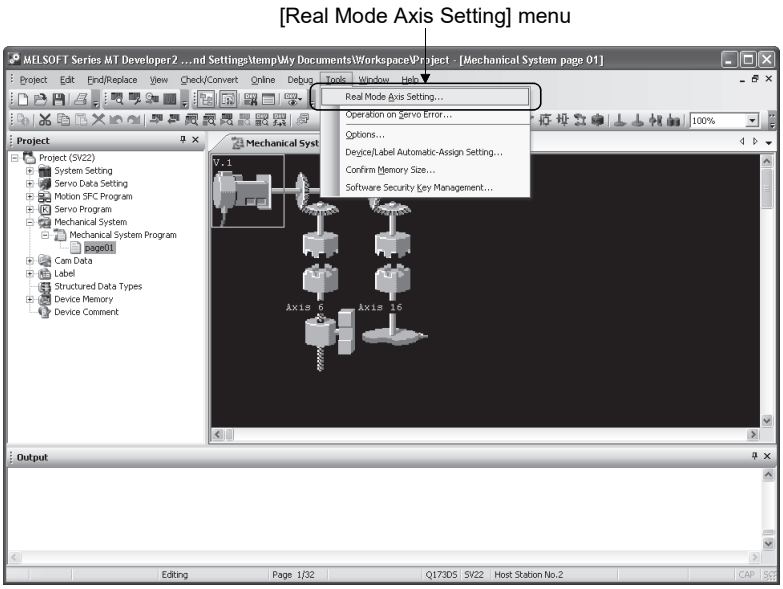

• Real mode axis setting screen

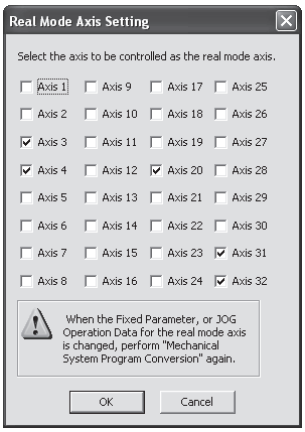

POINT

(1) Execute "Mechanical System Program Conversion" after setting "Real mode axis setting" in the mechanical system program editor.
(2) When a fixed parameter of each axis is changed, be sure to execute "Mechanical System Program Conversion".
(3) Axis No. set in the "Real mode axis setting" cannot be set as virtual servo motor axis No. And, the output axis No. set in the mechanical system program cannot be also set as real mode axis No.
(4) Operation cycle over may occur for default operation cycle depending on the number of axes for real mode axis. In this case, change an operation cycle to a large value in the system setting.

(1) Usable instructions and controls

Items		Usable/unusable	Remarks
Servo instructions	Linear positioning control	○	Positioning control with the torque limit value set in the servo program (parameter block)
	Linear interpolation control		
	Circular interpolation control		
	Helical interpolation control		
	Fixed-pitch feed control		
	Speed control (Ⅰ)		
	Speed control (Ⅱ)		
	Speed-position switching control		
	Position follow-up control		
	Constant-speed control		
	Simultaneous start		
	Speed control with fixed position stop		
	Home position return (ZERO)	○ Ver.!	
	High-speed oscillation (OSC)		
JOG operation		○	Control with JOG operation data
Speed-torque control QDS			Control with speed-torque control data
Manual pulse generator operation		○ Ver.!	
Current value change (D(P).CHGA Jn(Note), CHGA)		○	
Speed change (D(P).CHGV, CHGV)			
Torque limit value change (D(P).CHGT, CHGT)			
Torque limit value individual change (D(P).CHGT2, CHGT2) QDS			
Target position change (CHGP) QDS			

○ : Usable × : Unusable

(Note): "n" shows the numerical value (axis No. 1 to 32) correspond to axis No.

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(2) Control methods

Items	Control method	Remarks
Servo program start	• Use a Motion SFC program start or D(P).SVST instruction • Set a real mode axis No. as axis No.	• When the real mode axis is set to the virtual servo program and it starts, "Servo program setting error" (error code: 906) occurs. • When the real mode axis and virtual axis are set together to the interpolation axis if it starts, "Servo program setting error" (error code: 906) occurs.
Stop	• Turn the stop command (M3200+20n) or rapid stop command (M3201+20n) ON in real mode. • Turn the external signal (STOP) ON. • Use the deceleration stop or all axes rapid stop (Test mode ON) from MT Developer2. • Change speed to "0".	Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details.
JOG operation	Use the forward rotation JOG start command (M3202+20n) or reverse rotation JOG start command (M3203+20n).	Control with parameter JOG operation data.
Speed-torque control QDS	• Set the parameter required at Motion SFC program to switch the mode. • Set a real mode axis No. as axis No. for parameter setting.	Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details.
Current value change	• Use D(P).CHGA Jn (Note), CHGA instruction. • Set a real mode axis No. as axis No.	• When the D(P).CHGA Cn (Note) instruction is executed, the instruction is ignored. • When the CHGA-C instruction is executed to real mode axis, the instruction is ignored.
Speed change	• Use D(P).CHGV, CHGV instruction. • Set a real mode axis No. as axis No.	
Torque limit value change	• Use D(P).CHGT, CHGT instruction. • Set a real mode axis No. as axis No.	Torque limit value of real mode axis at switching from real mode to virtual mode continues the state in real mode.
Torque limit value individual change QDS	• Use D(P).CHGT2, CHGT2 instruction. • Set a real mode axis No. as axis No.	
Target position change QDS	• Use CHGP instruction. • Set a real mode axis No. as axis No.	

(Note): "n" shows the numerical value (axis No. 1 to 32) correspond to axis No.

(3) Error codes in real mode axis

Error codes at positioning control in the mixed function of virtual mode with real mode are shown below.

(a) Minor error (1 to 999)

(b) Major error (1000 to 1299)

Minor error (4000 to 9990)/major error (10000 to 12990) code of output module in virtual mode are not set in minor/major error code storage register (D6+20n/D7+20n).

(4) Difference for operation between the output axis of mechanical system program and real mode axis

Operation details for "output axis of mechanical system program" and "real mode axis" on error are shown below.

Items	Operation for output axis of mechanical system program	Operation for real mode axis
Feed current value exceeds the stroke limit range at switching from real mode to virtual mode.	• Minor error (error code: 5000) occurs. • Related system cannot be started.	• Minor error (error code: 105) occurs at servo program start, and operation does not start.
Feed current value exceeds the stroke limit range during operation.	• Minor error (error code: 6030) occurs. • Operation continues.	• Minor error (error code: 207) occurs, and deceleration stop is executed.
Output speed exceeds the speed limit value.	• Minor error (error code: 6010) occurs. • Speed cramp does not process by speed limit value.	• Servo program setting error or minor error occurs. Speed is controlled by speed limit value.
Stop signal (STOP) is ON.	• Major error (error code: 11020) occurs. • Operation continues for axis without clutch. • Operation is controlled based on the operation mode on error for axis with clutch.	• Major error (error code: 1000) occurs by turning the stop signal (STOP) on at start, and operation does not start. • Operation stops based on "deceleration processing at stop" of parameter block by turning the stop signal (STOP) on during operation.
External upper LS signal (FLS) turns off during travel to forward direction (address increase direction).	• Major error (error code: 11030) occurs. • Operation continues for axis without clutch. • Operation is controlled based on the operation mode on error for axis with clutch.	• Major error (error code: 1001) occurs by turning the external upper LS signal (FLS) off at start to forward direction, and operation does not start. • Major error (error code: 1101) occurs by turning the external upper LS signal (FLS) off during start to forward direction, operation stops based on "deceleration processing at stop" of parameter block.
External lower LS signal (RLS) turns off during travel to reverse direction (address decrease direction).	• Major error (error code: 11040) occurs. • Operation continues for axis without clutch. • Operation is controlled based on the operation mode on error for axis with clutch.	• Major error (error code: 1002) occurs by turning the external lower LS signal (RLS) off at start to reverse direction, and operation does not start. • Major error (error code: 1102) occurs by turning the external lower LS signal (RLS) off during start to reverse direction, operation stops based on "deceleration processing at stop" of parameter block.
Change the torque limit value.	• Any time valid by setting the torque limit value setting device of output axis and changing preset value. • Torque limit value individual change request instructions (D(P).CHGT2, CHGT2) are valid. QDSX	• Torque limit value change request instructions (D(P).CHGT, CHGT) and torque limit value individual change request instructions (D(P).CHGT2, CHGT2) QDSX are valid.

(5) Difference for operation between the real mode axis in virtual mode and real mode

When the servo OFF command (M3215+20n) turns on at using the mixed function of virtual mode with real mode in virtual mode, positioning control stops.

Items	Operation for real mode axis in virtual mode	Operation for axis in real mode
Servo OFF command (M3215+20n)	Invalid during positioning control.	Invalid during positioning control.
	Any time valid. (Operating system software version "00G" or before in the Q17□DCPU(-S1))	

(6) Cautions

(a) For the operating system software version "00G or before" in the Q17□DCPU(-S1), axis operation, current value, speed and torque limit value cannot be changed for all axes during mode switching.

(b) When the feed current value of real mode axis is outside the stroke limit range at virtual mode switching, an error will occur at start of real mode axis. Use the JOG operation to reverse within the stroke limit range.

POINT

For the operating system software version "00G or before" in the Q17□DCPU(-S1), switching from virtual mode to real mode cannot be executed during positioning control of real mode axis. Switch a mode after stop the real mode axis.

10.2 Speed-Torque Control QDS

Control mode can be switched for output axis of mechanical system and real mode axis during virtual mode.

(1) Speed-torque control in output axis of mechanical system

(a) The speed-torque control can be executed for output axis of roller, ball screw and rotary table as output module. When the control mode switching is executed for output axis of cam, a minor error (error code: 6240) will occur, and the control mode is not switched. When switching the mode to speed control mode or torque control mode, the control mode switching is possible during motor stop. When the motor is operating at control mode switching request, a minor error (error code: 6200) will occur, and the control mode is not switched. The mode can be switched to continuous operation to torque control mode even when the motor is operating.

(b) In the speed-torque control in output axis of mechanical system, the setting value of "Speed command device" is not referred, and the command speed to output axis is the value of command speed. Command speed acceleration time, command speed deceleration time and initial speed selection at control mode switching are also invalid. (For speed limit value, the value set in each output axis module is valid.)

(c) Control the command torque by setting torque command value in the torque command device set in speed-torque control data same as real mode. Torque limit value change request (D(P).CHGT, CHGT) is invalid (no operation), and the torque limit value to servo amplifier can be changed within the range of torque limit value at speed-torque control by the value of torque limit value setting device. (If the value is outside the range, a minor error (error code: 6250) will occur.)
Only when the torque limit value setting device of output module is not set, the torque limit value to servo amplifier can be changed within the range of torque limit value at speed-torque control by the torque limit value individual change request (D(P).CHGT2, CHGT2). If the value exceeds the torque limit value at speed-torque control is set in positive direction torque limit value or negative direction torque limit value, a minor error (error code: 6250) will occur, and the torque limit value is not changed.

(2) Cautions at control mode switching

(a) When using continuous operation to torque control mode, use servo amplifiers that support continuous operation to torque control. When using servo amplifiers that do not support continuous operation to torque control, a major error (error code: 11050) will occur at switching to continuous operation to torque control mode request, and the operation continues based on the parameter settings at major error occurrence, or the clutch is OFF.

(b) When the mode is switched from virtual mode to real mode, return all output axes to position control mode. If output axis except position control mode exists when the mode is switched from virtual mode to real mode, an error at real mode/virtual mode switching (error code: 256) will occur, and the mode is not switched to real mode.

(3) Stop causes during virtual mode

Operations of stop causes during "speed-torque control" in the output module during virtual mode are shown below.

Item	Operation during speed-torque control mode
The stop command (M3200+20n) turned ON. The rapid stop command (M3201+20n) turned ON.	Command is ignored, and operation continues.
The external stop input turned ON.	• A major error (error code: 10030) will occur, and related system cannot be started at virtual servo motor start • A major error (error code: 11020) will occur, and operation continues for axis without clutch during command. Operation is controlled based on the operation mode on error for axis with clutch.
The all axes servo ON command (M2042) turned OFF.	During virtual mode, OFF of the all axes servo ON command is not accepted, and the command is ignored. When the mode is returned to position control mode and switched to real mode, command status at the time is valid.
Servo OFF command (M3215+20n) turned ON.	• During no-clutch/clutch ON/clutch status ON, a minor error (error code: 6000) will occur. • When the control mode is speed control, torque control or continuous operation to torque control during clutch OFF, servo OFF is not executed. When the mode is switched to position control mode, command status at the time is valid.
The current value reached to software stroke limit.	A minor error (error code: 6030) will occur.
The position of motor reached to hardware stroke limit	A major error (error code: 11030, 11040) will occur, and operation continues for axis without clutch. Operation is controlled based on the operation mode on error for axis with clutch.
The PLC ready flag (M2000) turned OFF.	An error at real mode/virtual mode switching (error code: -4094(F002)) will occur, and the mode is returned to real mode. After that, the control mode is switched to position control mode, and the operation immediately stops.
The forced stop input to Motion CPU.	An error at real mode/virtual mode switching (error code: -4096(F000)) will occur, and the mode is returned to real mode. The control mode switches to position control mode at servo OFF.
The forced stop input to servo amplifier.	• During no-clutch/clutch ON/clutch status ON, a major error (error code: 11010) will occur, and operation continues for axis without clutch. Operation is controlled based on the operation mode on error for axis with clutch. • When the control mode is speed control, torque control or continuous operation to torque control during clutch OFF, the mode is switched to position control mode at servo OFF.
The servo error occurred.	An error at real mode/virtual mode switching (error code: -4095(F001)) will occur, and the mode is returned to real mode. The control mode switches to position control mode at servo OFF.
The servo amplifier's power supply turned OFF.	• During no-clutch/clutch ON/clutch status ON, a major error (error code: 11010) will occur, and operation continues for axis without clutch. Operation is controlled based on the operation mode on error for axis with clutch. • When the control mode is speed control, torque control, or continuous operation to torque control during clutch OFF, the mode switches to position control mode at the servo amplifier's power supply ON again.

(4) Speed-torque control in the real mode axis

The speed-torque control can be executed in the real mode axis.
In this case, the control follows the control during real mode.
The real mode axis can be switched from virtual to real mode during speed-torque control.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details of operation during real mode.

MEMO

APPENDICES

APPENDIX 1 Error Codes Stored Using the Motion CPU

The following errors are detected in the Motion CPU.

- Servo program setting error
- Positioning error
- Control mode switching error
- Motion SFC error (Note-1)
- Motion SFC parameter error (Note-1)
- Multiple CPU related error (Note-2)

(Note-1): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (Motion SFC)" for details.

(Note-2): Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for details.

(1) Servo program setting errors

These are positioning data errors set in the servo program, and it checks at the start of each servo program.

They are errors that occur when the positioning data is set indirectly.

The operations at the error occurrence are shown below.

- The servo program setting error flag (SM516) turns on.
- The erroneous servo program is stored in the error program No. storage register (SD516).
- The error code is stored in the error item information register (SD517).

(2) Positioning error

(a) Positioning errors occurs at the positioning start or during positioning control. There are minor errors, major errors and servo errors.

1) Minor errors ..... These errors occur in the Motion SFC program or servo program, and the error codes (drive module : 1 to 999, output module : 4000 to 9990) are used.
Check the error code, and remove the error cause by correcting the Motion SFC program or servo program.

2) Major errors ..... These errors occur in the external input signals or control commands from the Motion SFC program, and the error codes (drive module : 1 to 1999, output module : 10000 to 11990) are used.
Check the error code, and remove the error cause of the external input signal state or Motion SFC program.

3) Servo errors..... These errors detected in the servo amplifier, and the error codes 2000 to 2999 are used.
Check the error code, and remove the error cause of the servo amplifier side.

The error applicable range for each error class are shown below.

Error class	Erroneous category	Error module	
		Drive module	Output module
Minor error	Setting data	1 to 99	4000 to 4990
	At start	100 to 199	5000 to 5990
	During operation	200 to 299	6000 to 6990
	At control change	300 to 399	—
Major error	At start	1000 to 1099	10000 to 10990
	During operation	1100 to 1199	11000 to 11990
	System	—	15000 to 15990
Servo error	Servo amplifier	—	2000 to 2799 (2100 to 2499 : warning)
	Servo amplifier power supply module		2800 to 2999 (2900 or later : warning)

(b) The error detection signal of the erroneous axis turns on at the error occurrence, and the error codes are stored in the minor error code, major error code or servo error code storage register.

Error class \ Device		Error code storage register											
		Axis 1	Axis 2	Axis 3	Axis 4	Axis 5	Axis 6	Axis 7	Axis 8	Axis 9	Axis10	Axis11	Axis12
Virtual servo motor	Minor error code	D802	D812	D822	D832	D842	D852	D862	D872	D882	D892	D902	D912
	Major error code	D803	D813	D823	D833	D843	D853	D863	D873	D883	D893	D903	D913
Synchronous encoder	Minor error code	D1122	D1132	D1142	D1152	D1162	D1172	D1182	D1192	D1202	D1212	D1222	D1232
	Major error code	D1123	D1133	D1143	D1153	D1163	D1173	D1183	D1193	D1203	D1213	D1223	D1233
Output module	Minor error code	D6	D26	D46	D66	D86	D106	D126	D146	D166	D186	D206	D226
	Major error code	D7	D27	D47	D67	D87	D107	D127	D147	D167	D187	D207	D227
	Servo error code	D8	D28	D48	D68	D88	D108	D128	D148	D168	D188	D208	D228

Error class \ Device		Error code storage register											
		Axis13	Axis14	Axis15	Axis16	Axis17	Axis18	Axis19	Axis20	Axis21	Axis22	Axis23	Axis24
Virtual servo motor	Minor error code	D922	D932	D942	D952	D962	D972	D982	D992	D1002	D1012	D1022	D1032
	Major error code	D923	D933	D943	D953	D963	D973	D983	D993	D1003	D1013	D1023	D1033
Synchronous encoder	Minor error code												
	Major error code												
Output module	Minor error code	D246	D266	D286	D306	D326	D346	D366	D386	D406	D426	D446	D466
	Major error code	D247	D267	D287	D307	D327	D347	D367	D387	D407	D427	D447	D467
	Servo error code	D248	D268	D288	D308	D328	D348	D368	D388	D408	D428	D448	D468

Error class \ Device		Error code storage register								Error detection signal	Error reset command
		Axis25	Axis26	Axis27	Axis28	Axis29	Axis30	Axis31	Axis32		
Virtual servo motor	Minor error code	D1042	D1052	D1062	D1072	D1082	D1092	D1102	D1112	M4007+20n	M4807+20n
	Major error code	D1043	D1053	D1063	D1073	D1083	D1093	D1103	D1113		
Synchronous encoder	Minor error code									M4640+4n	M5440+4n
	Major error code										
Output module	Minor error code	D486	D506	D526	D546	D566	D586	D606	D626	M2407+20n	M3207+20n
	Major error code	D487	D507	D527	D547	D567	D587	D607	D627		
	Servo error code	D488	D508	D528	D548	D568	D588	D608	D628	M2408+20n	M3208+20n

(c) If another error occurs after an error code has been stored, the existing error code is overwritten, deleting it.
However, the error history can be checked using MT Developer2.

(d) Error detection signals and error codes are held until the error reset command (M3207+20n) or servo error reset command (M3208+20n) turns on.

POINT

(1) Even if the servo error reset (M3208+20n) turns on at the servo error occurrence, the same error code might be stored again.
(2) Reset the servo error after removing the error cause of the servo amplifier side at the servo error occurrence.

(3) Error at the real mode/virtual mode switching

These errors are checked when the real mode/virtual mode switching request flag (M2043) turns off to on/on to off.
When the check shown in Section 9.1 and 9.2 is executed, and if error is detected, it is as follows.

- It remains the current mode without the real mode/virtual mode switching.
- The real mode/virtual mode switching error detection flag (M2045) turns on.
- The error codes are stored in the real mode/virtual mode switching error information (SD504 to SD506).

POINT

- The axis error code among the error codes stored in the SD504 to SD506 is shown below.

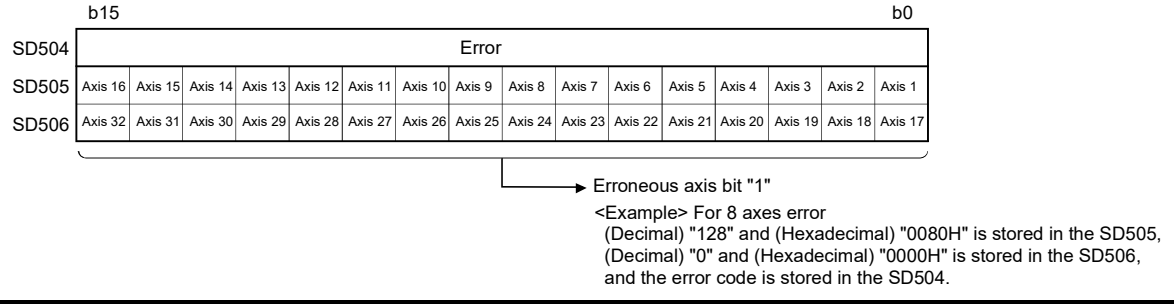

<Example> For 8 axes error
(Decimal) "128" and (Hexadecimal) "0080H" is stored in the SD505,
(Decimal) "0" and (Hexadecimal) "0000H" is stored in the SD506,
and the error code is stored in the SD504.

APPENDIX 1.1 Expression method for word data axis No.

The axis No. may be expressed to correspond to each bit of word data for the positioning dedicated signal.

Example of the TEST mode request error information (SD510, SD511) is shown below.

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD510	Axis 16	Axis 15	Axis 14	Axis 13	Axis 12	Axis 11	Axis 10	Axis 9	Axis 8	Axis 7	Axis 6	Axis 5	Axis 4	Axis 3	Axis 2	Axis 1
SD511	Axis 32	Axis 31	Axis 30	Axis 29	Axis 28	Axis 27	Axis 26	Axis 25	Axis 24	Axis 23	Axis 22	Axis 21	Axis 20	Axis 19	Axis 18	Axis 17

→ Stores the during operation/stop data of each axis
- 0 : During stop
- 1 : During operation

(Note): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(1) Axis 8 : Test mode request error

The controlling signal "1" is stored in SD510 "b7 (axis 8)".

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD510	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
SD511	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

	Decimal	Hexadecimal
SD510	128	0080H
SD511	0	0000H

(2) Axis 12, 20 : Test mode request error

The controlling signal "1" is stored in SD510 "b11 (axis 12)" and SD511 "b3 (axis 20)".

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD510	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
SD511	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0

	Decimal	Hexadecimal
SD510	2048	0800H
SD511	8	0008H

(3) Axis 4, 10 : Test mode request error

The controlling signal "1" is stored in SD510 "b3 (axis 4)" and SD511 "b9 (axis 10)".

	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1	b0
SD510	0	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0
SD511	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

	Decimal	Hexadecimal
SD510	520	0208H
SD511	0	0000H

APPENDIX 1.2 Related systems and error processing

There are following 2 types for the related systems of virtual mode.
- System consisting of a drive module and output module.
- Multiple systems used the same drive module.

The following processing occurs, when the error is detected at an output module.
- If an error is detected at least one output module, a drive module cannot start and that system cannot be operate.
  The auxiliary input axis operation for the erroneous output module also cannot operate.
- Other systems which use the drive module which could not start by the output module error also cannot operate.

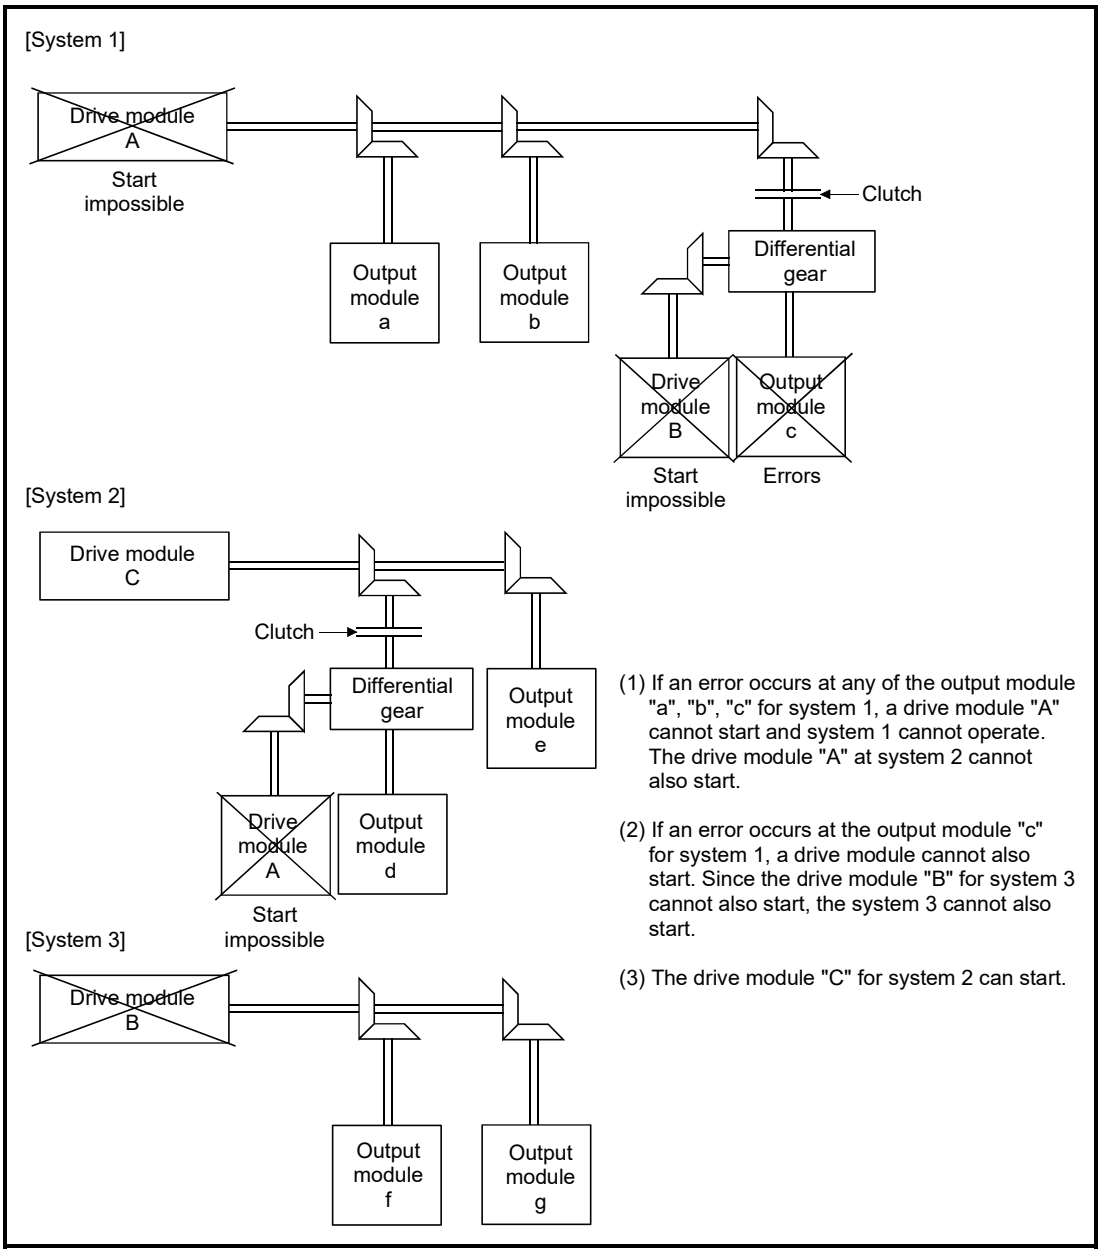

APPENDIX 1.3 Servo program setting errors (Stored in SD517)

The error codes, error contents and corrective actions for servo program setting errors are shown in Table 1.1.
In the error codes marked with "Note" indicates the axis No. (1 to 32).

Table 1.1 Servo program setting error list

<table>
<tr><th>Error code stored in SD517</th><th>Error name</th><th>Error contents</th><th>Error processing</th><th>Corrective action</th></tr>
<tr><td>1</td><td>Parameter block No. setting error</td><td>The parameter block No. is outside the range of 1 to 64.</td><td>Execute the servo program with the default value "1" of parameter block.</td><td>Set the parameter block No. within the range of 1 to 64.</td></tr>
<tr><td rowspan="2">n03 (Note)</td><td rowspan="2">Address (travel value) setting error (Except the speed control and speed/position control.) (Setting error for linear axis at the helical-interpolation.)</td><td>(1) The address is outside the setting range at the positioning start for absolute data method.
<table><tr><th>Unit</th><th>Address setting range</th><th></th></tr><tr><td>degree</td><td>0 to 35999999</td><td>× 10^{-5} [degree]</td></tr></table></td><td rowspan="2">(1) Positioning control does not start. (All interpolation control at the interpolation control.)
(2) If the error is detected during the speed-switching control or constant-speed control, a deceleration stop is made.
(3) If an error occurs in one servo program, all servo programs do not execute during the simultaneous start.</td><td>(1) If the control unit is [degree], set the address within the range of 0 to 35999999.</td></tr>
<tr><td>(2) The travel value is set to -2147483648 (H80000000) at the positioning start for incremental data method.</td><td>(2) Set the travel value within the range of "0 to ± (2^{31}-1)".</td></tr>
<tr><td>4</td><td>Command speed error</td><td>(1) The command speed is outside the range of 1 to the speed limit value.
(2) The command speed is outside the setting range.
<table><tr><th>Unit</th><th>Speed setting range</th><th></th></tr><tr><td>mm</td><td>1 to 600000000</td><td>× 10^{-2} [mm/min]</td></tr><tr><td>inch</td><td>1 to 600000000</td><td>× 10^{-3} [inch/min]</td></tr><tr><td>degree</td><td>1 to 2147483647</td><td>× 10^{-3} [degree /min] (Note-1)</td></tr><tr><td>pulse</td><td>1 to 2147483647</td><td>[pulse/s]</td></tr></table></td><td>(1) Positioning control does not start if the command speed is "0" or less.
(2) If the command speed exceeds the speed limit value, control with the speed limit value.</td><td>Set the command speed within the range of 1 to the speed limit value.</td></tr>
<tr><td>5</td><td>Dwell time setting error</td><td>The dwell time is outside the range of 0 to 5000.</td><td rowspan="2">Control with the default value "0".</td><td>Set the dwell time within the range of 0 to 5000.</td></tr>
<tr><td>6</td><td>M-code setting error</td><td>The M-code is outside the range of 0 to 32767.</td><td>Set the M-code within the range of 0 to 32767.</td></tr>
<tr><td>7</td><td>Torque limit value setting error</td><td>The torque limit value is outside the range of 1 to 1000.</td><td>Control with the torque limit value of the specified parameter block.</td><td>Set the torque limit value within the range of 1 to 1000.</td></tr>
</table>

(Note-1): When the "speed control 10× multiplier setting for degree axis" is set to "valid", the setting range is 0.01 to 21474836.47 [degree/min].

Table 1.1 Servo program setting error list (Continued)

<table>
<tr><th>Error code stored in SD517</th><th>Error name</th><th>Error contents</th><th>Error processing</th><th>Corrective action</th></tr>
<tr><td rowspan="2">n08 (Note)</td><td rowspan="2">Auxiliary point setting error
(At the auxiliary point-specified circular interpolation.)
(At the auxiliary point-specified helical interpolation.)</td><td>(1) The auxiliary point address is outside the setting range at the positioning start for absolute data method.
<table><tr><th>Unit</th><th colspan="2">Address setting range</th></tr><tr><td>degree</td><td>0 to 35999999</td><td>× 10^{-5} [degree]</td></tr></table></td><td rowspan="3">Positioning control does not start.</td><td>(1) If the control unit is [degree], set the auxiliary point address within the range of 0 to 35999999.</td></tr>
<tr><td>(2) The auxiliary point address is set to -2147483648 (H80000000) at the positioning start for incremental data method.</td><td>(2) Set the auxiliary point address within the range of 0 to ± (2^{31}-1).</td></tr>
<tr><td rowspan="2">n09 (Note)</td><td rowspan="2">Radius setting error
(At the radius-specified circular interpolation.)
(At the radius-specified helical interpolation.)</td><td>(1) The radius is outside the setting range at the positioning control for absolute data method.
<table><tr><th>Unit</th><th colspan="2">Address setting range</th></tr><tr><td>degree</td><td>0 to 35999999</td><td>× 10^{-5} [degree]</td></tr></table></td><td>(1) If the control unit is [degree], set the radius within the range of 0 to 35999999.</td></tr>
<tr><td>(2) The radius is set to "0" or negative setting at the positioning start for incremental data method.</td><td>(2) Set the radius within the range of 1 to (2^{31}-1).</td></tr>
<tr><td rowspan="2">n10 (Note)</td><td rowspan="2">Central point setting error
(At the central point-specified circular interpolation.)
(At the central point-specified helical interpolation.)</td><td>(1) The central point address is outside the setting range at the positioning start for absolute data method.
<table><tr><th>Unit</th><th colspan="2">Address setting range</th></tr><tr><td>degree</td><td>0 to 35999999</td><td>× 10^{-5} [degree]</td></tr></table></td><td>(1) If the control unit is [degree], set the central point address within the range of 0 to 35999999.</td></tr>
<tr><td>(2) The central point is set to -2147483648 (H80000000) at the positioning start for incremental data method.</td><td>(2) Set the central point address within the range of 0 to ± (2^{31}-1).</td></tr>
<tr><td>11</td><td>Interpolation control unit setting error</td><td>The interpolation control unit is set outside the range of 0 to 3.</td><td>Control with the default value "3".</td><td>Set the interpolation control unit within the range of 0 to 3.</td></tr>
<tr><td>12</td><td>Speed limit value setting error</td><td>The speed limit value is set outside the setting range.</td><td>Control with the default value 200000[pulse/s].</td><td>Set the speed limit value within the setting range.
[For pulse]
1 to 2147483647[pulse/s]</td></tr>
<tr><td rowspan="3">13</td><td>Acceleration time setting error</td><td>The acceleration time is set to "0".</td><td rowspan="3">Control with the default value "1000".</td><td>Set the acceleration time within the range of 1 to 65535.</td></tr>
<tr><td>FIN acceleration/ deceleration setting error</td><td>The FIN acceleration/deceleration time is set except 1 to 5000.</td><td>The FIN acceleration/ deceleration time within the range of 1 to 5000.</td></tr>
<tr><td>Fixed position stop acceleration/ deceleration time setting error</td><td>The fixed position stop acceleration/deceleration time is set to "0".</td><td>Set the fixed position stop acceleration/deceleration time within the range of 1 to 65535.</td></tr>
<tr><td>14</td><td>Deceleration time setting error</td><td>The deceleration time is set to "0".</td><td>Set the deceleration time within the range of 1 to 65535.</td></tr>
</table>

Table 1.1 Servo program setting error list (Continued)

<table>
<tr><th>Error code stored in SD517</th><th>Error name</th><th>Error contents</th><th>Error processing</th><th>Corrective action</th></tr>
<tr><td>15</td><td>Rapid stop deceleration time setting error</td><td>The rapid stop deceleration time is set to "0".</td><td>Control with the default value "1000".</td><td>Set the rapid stop deceleration time within the range of 1 to 65535.</td></tr>
<tr><td>16</td><td>Torque limit value setting error</td><td>The torque limit value is outside the range of 1 to 1000.</td><td>Control with the default value "300[%]".</td><td>Set the torque limit value within the range of 1 to 1000.</td></tr>
<tr><td>17</td><td>Allowable error range for circular interpolation setting error</td><td>The allowable error range for circular interpolation is outside the setting range.<table><tr><th>Unit</th><th colspan="2">Address setting range</th></tr><tr><td>mm</td><td rowspan="4">0 to 100000</td><td>$\times 10^{-1}$ [μm]</td></tr><tr><td>inch</td><td>$\times 10^{-5}$ [inch]</td></tr><tr><td>degree</td><td>$\times 10^{-5}$ [degree]</td></tr><tr><td>pulse</td><td>[pulse]</td></tr></table></td><td>Control with the default value "100[pulse]".</td><td>Set the allowable error range for circular interpolation within the setting range.</td></tr>
<tr><td>18</td><td>Repeat count error</td><td>The repeat count is outside the range of 1 to 32767.</td><td>Control the repeat count with "1".</td><td>Set the repeat count within the range of 1 to 32767.</td></tr>
<tr><td rowspan="5">19</td><td rowspan="5">START instruction setting error</td><td>(1) The servo program specified with the START instruction does not exist.</td><td rowspan="10">Positioning control does not start.</td><td>(1) Create the servo program specified with the START instruction.</td></tr>
<tr><td>(2) There is a START instruction in the specified servo program.</td><td>(2) Delete the servo program specified with the START instruction.</td></tr>
<tr><td>(3) The starting axis of the specified servo program overlap.</td><td>(3) Do not overlap the starting axis.</td></tr>
<tr><td>(4) The real mode program and virtual mode program are mixed.</td><td>(4) Do not allow mixture of the real mode program and virtual mode program.</td></tr>
<tr><td>(5) The real axis program and command generation axis program are mixed.</td><td>(5) Do not allow mixture of the real axis program and command generation axis program.</td></tr>
<tr><td>20</td><td>Point setting error</td><td>Point is not specified in the instruction at the constant-speed control.</td><td>Set a point between CPSTART and CPEND.</td></tr>
<tr><td>21</td><td>Reference axis speed setting error</td><td>The axis except interpolation axis is set as the reference axis at the linear interpolation of the reference axis speed-specified method.</td><td>Set one of the interpolation axes as the reference axis.</td></tr>
<tr><td>22</td><td>S-curve ratio setting error</td><td>S-curve ratio is set outside the range of 0 to 100[%] at the S-curve acceleration/deceleration.</td><td>Control the S-curve ratio with 0[%] (Trapezoidal acceleration/deceleration).</td><td>Set the S-curve ratio within the range of 0 to 100[%].</td></tr>
<tr><td>23</td><td>VSTART setting error</td><td>Not even one speed-switching point has been set between a VSTART and VEND instruction, or between FOR and NEXT instruction.</td><td rowspan="2">Positioning control does not start.</td><td>Set the speed switching point between the VSTART and VEND instructions or the FOR and NEXT instructions.</td></tr>
<tr><td>24</td><td>Cancel function start program No. error</td><td>The start program No. for the cancel function is set outside the range 0 to 4095.</td><td>Start after set the start program No. within the range of 0 to 4095.</td></tr>
</table>

Table 1.1 Servo program setting error list (Continued)

Error code stored in SD517	Error name	Error contents	Error processing	Corrective action
25	High-Speed oscillation command amplitude error	Operation cannot be started because the amplitude specified with the high-speed oscillation function is outside the range 1 to 2147483647.	Positioning control does not start.	Start after set the command amplitude within the range of 1 to 214783647.
26	High-Speed oscillation command starting angle error	Operation cannot be started because the starting angle specified with the high-speed oscillation function is outside the range of 0 to 3599 (×0.1[degree]).		Start after set the starting angle within the range of 0 to 3599 (×0.1 [degree]).
27	High-Speed oscillation command frequency error	Operation cannot be started because the frequency specified with the high-speed oscillation function is outside the range of 1 to 5000[CPM].		Start after set the frequency within the range of 1 to 5000[CPM].
28	Number of helical interpolation pitches error	The specified number of pitches of helical interpolation is outside the range of 0 to 999.		Set the specified number of pitches within the range of 0 to 999.
41	Device error of the home position return data for indirect setting	Any unauthorized devices are set in the home position return data for indirect setting.	Positioning control does not start.	Review the devices of home position return data for indirect setting.
45	Advanced S-curve acceleration/ deceleration setting error	The acceleration section 1 ratio is outside the range of 0.0 to 100.0[%].	Control with acceleration section 1 ratio = 0.0 acceleration section 2 ratio = 0.0 deceleration section 1 ratio = 0.0 deceleration section 2 ratio = 0.0	Set the each ratio within the range of 0.0 to 100.0[%].
46		The acceleration section 2 ratio is outside the range of 0.0 to 100.0[%].		
47		The deceleration section 1 ratio is outside the range of 0.0 to 100.0[%].		
48		The deceleration section 2 ratio is outside the range of 0.0 to 100.0[%].		
49		(Acceleration section 1 + Acceleration section 2) > 100.0[%]		
50		(Deceleration section 1 + Deceleration section 2) > 100.0[%]		
51	Rapid stop deceleration time setting error	The rapid stop deceleration time is bigger than the setting value of deceleration time.	Control the rapid stop deceleration time with the setting value of deceleration time.	Set the rapid stop deceleration time within the range of 1 to deceleration time setting value.
900	START instruction setting error	The servo program specified with the servo program start does not exist.	Positioning control does not start.	Set the correct servo program No.
901	START instruction setting error	The axis No. set in the servo program start is different from the axis No. set in the servo program.		Set the correct axis No.
902	Servo program instruction code error	The instruction code cannot be decoded. (A non-existent instruction code has been specified.)		Set the correct instruction code

Table 1.1 Servo program setting error list (Continued)

Error code stored in SD517	Error name	Error contents	Error processing	Corrective action
903	Start error	A virtual mode program was started in the real mode.	Positioning control does not start.	Check the program mode allocation.
905	Start error	(1) Operation disable instructions (VPF, VPR, VPSTART, PVF, PVR, ZERO, VVF, VVR, OSC) was started in virtual mode.		Correct the servo program.
		(2) Operation disable instructions (ZERO, OSC, CHGA-C) was started in real mode axis.		
		(3) Operation disable instructions (VPF, VPR, VPSTART, VSTART, ZERO, VVF, VVR, OSC) was started in command generation axis.		
		(4) Operation disable instructions (CHGA-C, CHGA-E) from the D(P).SVST instruction of Motion dedicated instruction was started.		Use the D(P).CHGA instruction of Motion dedicated instruction.
906	Axis No. setting error	(1) Unused axis of the system setting is set in the servo program start.		Set the axis No. set in the system setting or mechanical system program.
		(2) It was started by setting the real mode axis in the virtual servo program.		
		(3) It was started in the condition that the real mode axis had been mixed with virtual axis in the interpolation axis.		
		(4) It was started by setting the virtual axis in the real mode program in virtual mode.		
907	Start error	It was started during processing for switching from real mode to virtual mode.		Use M2043 (real mode/virtual mode switching request), M2044 (real mode/virtual mode switching status) as interlocks for start.
908	Start error	It was stated during processing for switching from virtual mode to real mode.		

APPENDIX 1.4 Drive module errors

Table 1.2 Drive module error (100 to 1199) list

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	100	○	○	○	○	○	○	○		○	• The PLC ready flag (M2000) or PCPU READY complete flag (SM500) is OFF.	Positioning control does not start.	• Set the Motion CPU to RUN. • Turn the PLC ready flag (M2000) on.
	101	○	○	○	○	○	○	○		○	• The start accept flag (M2001 to M2032) for applicable axis is ON.		• Take an interlock in the program not to start the starting axis. (Use the start accept flag OFF of the applicable axis as the starting condition).
	103	○	○	○	○	○	○	○		○	• The stop command (M4800+20n) for applicable axis is ON.		• Turn the stop command (M4800+20n) off and start.
	104	○	○	○	○	○	○	○		○	• The rapid stop command (M4801 +20n) for applicable axis is ON.		• Turn the rapid stop command (M4801+20n) off and start.
	105 (Note)	○			○	○				○	• The feed current value is outside the range of stroke limit at the start.		• Set within the stroke limit range by the JOG operation. • Set within the stroke limit range by the home position return or current value change.
	106 (Note)	○	○		○	○				○	• Positioning is outside the range of stroke limit.		• Perform the positioning within the range of stroke limit.
											• When absolute position system is enabled for stepping driver, and software stroke limit is valid with control units as degree, the following instructions were started. (1) Absolute system instructions in constant-speed control (2) Position follow-up control (3) Absolute system instructions in speed-switching control		• When absolute position system is enabled for stepping driver, if software stroke limit is valid and control units are degree, do not use the following instructions. (1) Absolute system instructions in constant-speed control (2) Position follow-up control (3) Absolute system instructions in speed-switching control
	107 (Note)	○				○					• The address that does not generate an arc is set at auxiliary point-specified circular interpolation or auxiliary point-specified helical interpolation. (Relationship between the start point, auxiliary point and end point.)		• Correct the addresses of the servo program.
											• The auxiliary point-specified circular interpolation or auxiliary point-specified helical interpolation was started in the control unit degree axis which is "stroke limit invalid".		• Make the stroke limit valid for the control unit degree axis starts the auxiliary point-specified circular interpolation or auxiliary point-specified helical interpolation.
											• The auxiliary point-specified circular interpolation or auxiliary point-specified helical interpolation was started in the axis which is "stroke limit invalid".		• Make the stroke limit valid for the axis starts the auxiliary point-specified circular interpolation or auxiliary point-specified helical interpolation.

(Note): This error code is stored at all relevant interpolation axis storage areas at the interpolation operation.

Table 1.2 Drive module error (100 to 1199) list (Continued)

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	108 (Note)	○				○					• The address that does not generate an arc is set at R(radius) specified circular interpolation or R(radius) specified helical interpolation. (Relationship between the start point, radius and end point.)	Positioning control does not start.	• Correct the addresses of the servo program.
											• The radius-specified circular interpolation or radius-specified helical interpolation was started in the control unit degree axis which is "stroke limit invalid".		• Make the stroke limit valid for the control unit degree axis starts the radius-specified circular interpolation or radius-specified helical interpolation.
											• The radius-specified circular interpolation or radius-specified helical interpolation was started in the axis which is "stroke limit invalid".		• Make the stroke limit valid for the axis starts the radius-specified circular interpolation or radius-specified helical interpolation.
	109 (Note)	○				○					• The address that does not generate an arc is set at central point-specified circular interpolation or central point-specified helical interpolation. (Relationship between the start point, central point and end point.)		• Correct the addresses of the servo program.
											• The central point-specified circular interpolation or central point-specified helical interpolation was started in the control unit degree axis which is "stroke limit invalid".		• Make the stroke limit valid for the control unit degree axis starts the central point-specified circular interpolation or central point-specified helical interpolation.
											• The central point-specified circular interpolation or central point-specified helical interpolation was started in the axis which is "stroke limit invalid".		• Make the stroke limit valid for the axis starts the central point-specified circular interpolation or central point-specified helical interpolation.
	110 (Note)	○				○					• The difference between the end point address and ideal end point is outside the allowable error range for circular interpolation at the circular interpolation.		• Correct the addresses of the servo program.
	116						○				• The setting JOG speed is "0".		• Set the correct speed (within the setting range).
											• The setting JOG speed exceeded the JOG speed limit value.	Control with the JOG speed limit value.	
											• The setting JOG speed limit value exceeded the setting range.	Control with the maximum setting range of each control unit.	• Set the correct JOG speed limit value (within the setting range).

(Note): This error code is stored at all relevant interpolation axis storage areas at the interpolation operation.

Table 1.2 Drive module error (100 to 1199) list (Continued)

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	117						○				• Both of forward and reverse rotation were set at the simultaneous start for the JOG operation.	Only the applicable axis set to the forward direction starts.	• Set a correct data.
	119				○						• In the real mode or at the real mode axis, the instruction to specify the end point address by absolute data method in speed switching control was executed for the axis with unit [pulse/mm/inch] where the stroke limit is disabled.	Positioning control does not start.	• When specifying the end point address by absolute data method in speed switching control, make the stroke limit valid.
	136			○							• An unusable instruction (VVF/VVR) was started in an axis that does not support VVF/VVR instruction.		• Cannot start VVF/VVR instruction in an axis that does not support VVF/VVR instruction.
	140	○									• The travel value of the reference axis is set at "0" in the linear interpolation for reference axis specification.		• Do not set axis of travel value "0" as the reference axis.
	141									○	• The position command device of position follow-up control is set the odd number.		• Set the even number for the position command device of position follow-up control.
	151	○	○	○	○	○	○	○		○	• Not allowed axis started in the virtual mode. (It cannot be started with error at real mode/virtual mode switching.)		• Start in the virtual mode again after correct the error cause in the real mode.
	152	○	○	○	○	○	○	○		○	• It started at the virtual mode and during deceleration by all axes servo OFF (M2042 OFF).		
	153	○	○	○	○	○	○	○		○	• It started at the virtual mode and during deceleration by occurrence of the output module servo error.		
	200	○	○	○	○	○	○	○		○	• The PLC ready flag (M2000) turned off during the control by the servo program.	Deceleration stop	• Turn the PLC ready flag (M2000) on after all axes have stopped.
	204	○	○	○	○	○	○	○		○	• The PLC ready flag (M2000) turned off to on again during deceleration by turning off the PLC ready flag (M2000).	No operation	• Turn the PLC ready flag (M2000) off to on after all axes have stopped. (Turn the PLC ready flag (M2000) off to on during deceleration is "no operation".)
	207	○			○	○	○			○	• The feed current value exceeded the stroke limit range during positioning control. Only the axis exceed the stroke limit range is stored at the circular/helical interpolation. All interpolation axes are stored in the linear interpolation.	Deceleration stop	• Correct the stroke limit range or travel value setting so that positioning control is within the range of the stroke limit.

Table 1.2 Drive module error (100 to 1199) list (Continued)

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	208	○			○	○		○			• The feed current value of another axis exceeded the stroke limit value during the circular/helical interpolation control or simultaneous manual pulse generator operation. (For detection of other axis errors).	Deceleration stop	• Correct the stroke limit range or travel value setting so that positioning control is within the range of the stroke limit.
	211					○					• During positioning control, an overrun occurred because the deceleration distance for the output speed is not attained at the point where the final positioning address was detected.		• Set the speed setting so that overrun does not occur. • Set the travel value so that overrun does not occur.
	214							○			• The manual pulse generator was enabled during the start of the applicable axis, the manual pulse generator operation was executed.	Manual pulse generator input is ignored until the axis stops.	• Execute the manual pulse generator operation after the applicable axis stopped.
	215				○						• The speed switching point address exceed the end point address.	Rapid stop	• Set the speed-switching point between the previous speed switching point address and the end point address.
											• The positioning address in the reverse direction was set during the speed switching control.		
											• The same servo program was executed again.		• Correct the Motion SFC program.
	220									○	• When the control unit is "degree" during the position follow-up control, the command address exceeded the range of 0 to 35999999.	Deceleration stop	• When the control unit is "degree", set the command address within the range of 0 to 35999999.
											• The command address for the position follow-up control exceeded the stroke limit range.		• Set the address within the stroke limit range.
	225					○					• The speed at the pass point exceeded the speed limit value during constant-speed control.	Control with the speed limit value.	• Set the speed command value within the range of 1 to speed limit value.
											• The speed at the pass point is 0 or less.	Control with the speed of last pass point	
	230					○					• When the skip is executed in the constant-speed control, the next interpolation instruction is an absolute circular interpolation or absolute helical interpolation.	Immediate stop	• If absolute circular interpolation or absolute helical interpolation is designated at a point after the skip designation point, set an absolute linear interpolation in the interval.
											• After the skip is executed in the constant-speed control, an absolute circular interpolation or absolute helical interpolation is executed while passing through only the positioning point for incremental method.	Deceleration stop	

Table 1.2 Drive module error (100 to 1199) list (Continued)

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	260	○	○			○					• The target position change request (CHGP) specifying the address where the target position is outside the range of 0 to 35999999 is executed to the axis whose unit is [degree].	Deceleration stop	• When executing the target position change request specifying the address to the axis whose unit is [degree], set the target position within the range of 0 to 35999999.
	261	○	○			○					• At the target position change request (CHGP), since the travel to the target position after the change was shorter than the deceleration distance, an overrun occurred.		• Set the speed so that an overrun will not occur. •Set the target position so that an overrun will not occur.
	262	○	○			○					• At the target position change request (CHGP), the target position after the change exceeds the range of the stroke limit.		• Set the stroke limit range or the target position after the change so that the positioning control is performed within the stroke limit range.
	263	○	○			○					• The target position change request (CHGP) is executed to the program where the following acceleration/deceleration system is set. (1) FIN acceleration/deceleration (2) Advanced S-curve acceleration/deceleration		• Do not execute the target position change to the program where the FIN acceleration/deceleration or the advanced S-curve acceleration/deceleration is set. • Set the acceleration/deceleration system of the parameter block or the servo program to the trapezoid/S-curve acceleration/deceleration.
	264	○									• In reference axis-specified linear interpolation or the long axis-specified linear interpolation, the travel of the reference axis or the long axis after the target position change request (CHGP) is 0.		• Set a target position so that the travel of the reference axis or the long axis after the target position change is not 0.
	300	○	○	○	○	○	○	○		○	• The current value was changed during positioning control of the applicable axis. • The current value was changed for the axis that had not been started. • The current value was changed for the servo OFF axis.	Current value is not changed.	• Use the following devices as interlocks not to change the current value for the applicable axis. (1) The start accept flag (M2001 to M2032) OFF for applicable axis. (2) The servo READY signal (M2415+20n) ON.
	305				○		○			○	• The speed after speed change is set outside the range of 0 to speed limit value.	Control with the speed limit value.	• Set the speed after speed change within the range of 0 to speed limit value.
		○	○	○		○					• The absolute value of speed after speed change is set outside the range of 0 to speed limit value.		• Set the absolute value of speed after speed change within the range of 0 to speed limit value.

Table 1.2 Drive module error (100 to 1199) list (Continued)

Error class	Error code	Control mode of virtual servo axis									Error cause	Error processing	Corrective action
		Positioning	Fixed-pitch feed	Speed	Speed switching	Constant-speed	JOG	Manual pulse generator	Synchronous encoder	Position follow-up			
Minor error	310	○	○	○	○	○	○			○	• Change speed to negative speed in the invalid axis of stroke limit.	Speed is not changed.	• Do not change speed to negative speed in the invalid axis of stroke limit.
	330			○	○		○	○			• The target position change request (CHGP) was executed for the axis which was executing a servo instruction which was not compatible with target position change.	Target position is not changed.	• Change the target position for the axes operated by the following servo instructions. (1) Linear interpolation control (2) Fixed-pitch feed operation (3) Constant-speed control
Major error	1151								○		• Q172DEX or encoder hardware error.	Immediate input stop	• Check (replace) the Q172DEX or encoder.
											• Disconnected encoder cable		• Check the encoder cable
											• A synchronous encoder set in the system setting differs from a synchronous encoder actually connected.	Input from synchronous encoder does not accept.	• Set a synchronous encoder actually connected in the system setting.
											• No battery or disconnected battery at Q172DEX.	Immediate input stop	• Replace the battery and turn ON the Multiple CPU system power supply a few minutes later.
	1152								○		• Low voltage at Q172DEX.	Operation is continued.	• Replace the battery.
	1153								○		• No battery or disconnected battery at Q172DEX.		• Replace the battery or check (replace) the Q172DEX.

APPENDIX 1.5 Servo errors

(1) Servo errors (2000 to 2999)

These errors are detected by the servo amplifier, and the error codes are [2000] to [2999].

The servo error detection signal (M2408+20n) turns on at the servo error occurrence. Eliminate the error cause, reset the servo amplifier error by turning on the servo error reset command (M3208+20n) and perform re-start. (The servo error detection signal does not turn on because the codes [2100] to [2599] are for warnings.)

(Note-1): As for the regenerative alarm (error code [2030]) or overload 1 or 2 (error codes [2050], [2051]), the state at the operation is held also for after the protection circuit operation in the servo amplifier. The memory contents are cleared with the external power supply off, but are not cleared by the reset signal.

(Note-2): If resetting by turning off the external power supply is repeated at the occurrence of error code [2030], [2050] or [2051], it may cause devices to be destroyed by overheating. Re-start operation after eliminating the cause of the error certainly.

The hexadecimal display of servo amplifier display servo error code (#8008+20n) is the same as the LED of servo amplifier. Ver.!

⚠CAUTION
● If a controller, servo amplifier self-diagnosis error occurs, check the points stated in this manual and clear the error.

List of servo errors are shown in next page or later.
Refer to the "Servo amplifier Instruction Manual" for details.

Servo amplifier type	Instruction manual name
MR-J5-□B	MR-J5 User's Manual (Troubleshooting) (SH-030312ENG)
MR-J5W-□B	
MR-J4-□B	SSCNETⅢ/H Interface AC Servo MR-J4-_B_(-RJ) Servo amplifier Instruction Manual (SH-030106)
MR-J4W-□B	SSCNETⅢ/H Interface Multi-axis AC Servo MR-J4W2-_B/MR-J4W3-_B/ MR-J4W2-0303B6 Servo amplifier Instruction Manual (SH-030105)
MR-J3-□B	SSCNETⅢ interface MR-J3-□B Servo amplifier Instruction Manual (SH-030051)
MR-J3W-□B	SSCNETⅢ interface 2-axis AC Servo Amplifier MR-J3W-0303BN6/MR-J3W-□B Servo amplifier Instruction Manual (SH-030073)
MR-J3-□B-RJ004	SSCNETⅢ Compatible Linear Servo MR-J3-□B-RJ004U□ Instruction Manual (SH-030054)
MR-J3-□B-RJ006	SSCNETⅢ Compatible Fully Closed Loop Control MR-J3-□B-RJ006 Servo amplifier Instruction Manual (SH-030056)
MR-J3-□B-RJ080	SSCNETⅢ interface Direct Drive Servo MR-J3-□B-RJ080W Instruction Manual (SH-030079)
MR-J3-□B Safety	SSCNETⅢ interface Drive Safety integrated MR-J3-□B Safety Servo amplifier Instruction Manual (SH-030084)

Ver.!: Refer to Section 1.4 for the software version that supports this function.

(a) MR-J5(W)-☐B

The servo errors below are all displayed with the same error codes (2000 or 2100).

Check servo amplifier display servo error code (#8008+20n) for the details of servo errors read by the servo amplifier.

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-☐B)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	010.1	Undervoltage	Voltage drop in the control circuit power	
	010.2		Voltage drop in the main circuit power	
	011.1	Switch setting error	Rotary switch setting error	
	011.2		Disabled axis setting error	
	012.1	Memory error 1 (RAM)	RAM error 1	
	012.2		RAM error 2	
	012.4		RAM error 4	
	012.5		RAM error 5	
	012.6		RAM error 6	
	012.7		RAM error 7	
	012.8		RAM error 8	
	012.9		RAM error 9	
	013.1	CPU error	CPU error 1	
	013.2		CPU error 2	
	013.4		CPU error 4	
	013.5		CPU error 5	
	014.1	Control process error	Control process error 1	
	014.2		Control process error 2	
	014.3		Control process error 3	
	014.4		Control process error 4	
	014.5		Control process error 5	
	014.8		Control process error 8	
	014.9		Control process error 9	
	014.C		Control process error 12	
	016.1	Encoder initial communication error 1	Encoder initial communication – Receive data error 1	
	016.2		Encoder initial communication – Receive data error 2	
	016.3		Encoder initial communication – Receive data error 3	
	016.5		Encoder initial communication – Transmission data error 1	
	016.6		Encoder initial communication – Transmission data error 2	
	016.7		Encoder initial communication – Transmission data error 3	
	016.A		Encoder initial communication – Process error 1	
	016.B		Encoder initial communication – Process error 2	
	016.C		Encoder initial communication – Process error 3	
	016.D		Encoder initial communication – Process error 4	
	016.E		Encoder initial communication – Process error 5	
	016.F		Encoder initial communication – Process error 6	

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	017.1	Board error	Board error 1	
	017.3		Board error 2	
	017.4		Board error 3	
	017.5		Board error 4	
	017.6		Board error 5	
	017.7		Board error 7	
	017.9		Board error 8	
	019.1	Memory error 3	Flash-ROM error 1	
	019.2		Flash-ROM error 2	
	019.3		Flash-ROM error 3	
	019.6		Flash-ROM error 6	
	01A.1	Servo motor combination error	Servo motor combination error 1	
	01A.2		Servo motor control mode combination error	
	01A.3		Control mode/load-side encoder combination error	
	01A.4		Servo motor combination error 2	
	01A.5		Servo motor combination error 3	
	01A.6		Servo motor combination error 4	
	01E.1	Encoder initial communication error 2	Encoder malfunction	
	01E.2		Load-side encoder malfunction	
	01F.1	Encoder initial communication error 3	Incompatible encoder	
	01F.2		Incompatible load-side encoder	
	020.1	Encoder normal communication error 1	Encoder normal communication – Receive data error 1	
	020.2		Encoder normal communication – Receive data error 2	
	020.3		Encoder normal communication – Receive data error 3	
	020.5		Encoder normal communication – Transmission data error 1	
	020.6		Encoder normal communication – Transmission data error 2	
	020.7		Encoder normal communication – Transmission data error 3	
	021.1	Encoder normal communication error 2	Encoder data error 1	
	021.2		Encoder data update error	
	021.3		Encoder data waveform error	
	021.4		No encoder signal	
	021.5		Encoder hardware error 1	
	021.6		Encoder hardware error 2	
	024.1	Main circuit error	Ground fault detected via hardware detection circuit	
	024.2		Ground fault detected via software detection processing	
	025.1	Absolute position erased	Servo motor encoder absolute position erased	
	025.2		Scale measurement encoder – Absolute position erased	

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	027.1	Initial magnetic pole detection error	Initial magnetic pole detection – Abnormal termination	
	027.2		Initial magnetic pole detection – Time out error	
	027.3		Initial magnetic pole detection – Limit switch error	
	027.4		Initial magnetic pole detection – Estimation error	
	027.5		Initial magnetic pole detection – Speed deviation error	
	027.6		Initial magnetic pole detection – Position deviation error	
	027.7		Initial magnetic pole detection – Current error	
	028.1	Linear encoder error 2	Linear encoder environmental error	
	028.2		Load-side linear encoder environmental error	
	02A.1	Linear encoder error 1	Linear encoder error 1-1	
	02A.2		Linear encoder error 1-2	
	02A.3		Linear encoder error 1-3	
	02A.4		Linear encoder error 1-4	
	02A.5		Linear encoder error 1-5	
	02A.6		Linear encoder error 1-6	
	02A.7		Linear encoder error 1-7	
	02A.8		Linear encoder error 1-8	
	02B.1	Encoder counter error	Encoder counter error 1	
	02B.2		Encoder counter error 2	
	030.1	Regenerative error	Regenerative heat error	
	030.2		Regenerative signal error	
	030.3		Regenerative feedback signal error	
	031.1	Overspeed	Servo motor speed error	
	032.1	Overcurrent	Overcurrent detected via hardware detection circuit (during operation)	
	032.2		Overcurrent detected via software detection processing (during operation)	
	032.3		Overcurrent detected via hardware detection circuit (during a stop)	
	032.4		Overcurrent detected via software detection processing (during a stop)	
	033.1	Overvoltage	Main circuit voltage error	
	034.1	SSCNET receive error 1	SSCNET receive data error	
	034.2		SSCNET connector connection error	
	034.3		SSCNET communication data error	
	034.4		Hardware error signal detection	
	034.7		SSCNET communication data error 2	
	035.1	Command frequency error	Command frequency error	
	036.1	SSCNET receive error 2	Intermittent communication data error	
	037.1	Parameter error (Note-1)	Parameter setting range error	
	037.2		Parameter combination error	
	037.6		Parameter mismatch error	
	03A.1	Inrush current suppression circuit error	Inrush current suppression circuit error	

(Note-1): Refer to the parameter No. stored in parameter error No. (#8009+20n) for details of the parameter for which the error occurred.

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	03D.1	Driver communication parameter setting error	Slave-side driver communication parameter combination error	
	03D.2		Master-side driver communication parameter combination error	
	03E.9	Operation mode error	Connection mode error 1	
	042.1	Servo control error	Servo control error based on position deviation	
	042.2		Servo control error based on speed deviation	
	042.3		Servo control error based on torque/thrust deviation	
	042.8		Fully closed loop control error based on position deviation	
	042.9		Fully closed loop control error based on speed deviation	
	042.A		Fully closed loop control error based on position deviation during command stop	
	045.1	Main circuit device overheat	Main circuit device overheat error 1	
	045.2		Main circuit device overheat error 2	
	046.1	Servo motor overheat	Servo motor temperature error 1	
	046.2		Servo motor temperature error 2	
	046.3		Thermistor disconnected error	
	046.4		Thermistor circuit error	
	046.5		Servo motor temperature error 3	
	046.6		Servo motor temperature error 4	
	046.7		Servo motor temperature error 5	
	047.1	Cooling fan error	Cooling fan stop error	
	047.2		Decreased cooling fan speed error	
	050.1	Overload 1	Thermal overload error 1 during operation	
	050.2		Thermal overload error 2 during operation	
	050.3		Thermal overload error 4 during operation	
	050.4		Thermal overload error 1 during a stop	
	050.5		Thermal overload error 2 during a stop	
	050.6		Thermal overload error 4 during a stop	
	051.1	Overload 2	Thermal overload error 3 during operation	
	051.2		Thermal overload error 3 during a stop	
	052.1	Excessive error	Excessive droop pulse 1	
	052.3		Excessive droop pulse 2	
	052.4		Excessive error during 0 torque limit	
	052.5		Excessive droop pulse 3	
	052.6		Excessive droop pulse at servo-off	
	054.1	Oscillation detection	Oscillation detection error	
	056.2	Forced stop error	Speed exceeded during forced stop	
	056.3		Estimated distance exceeded during forced stop	
	056.5		Travel distance exceeded during forced stop 2	
	063.1	STO timing error	STO1 off	
	063.2		STO2 off	
	068.1	STO diagnosis error	STO signal mismatch error	

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	070.1	Load-side encoder initial communication error 1	Load-side encoder initial communication – Receive data error 1	
	070.2		Load-side encoder initial communication – Receive data error 2	
	070.3		Load-side encoder initial communication – Receive data error 3	
	070.5		Load-side encoder initial communication – Transmission data error 1	
	070.6		Load-side encoder initial communication – Transmission data error 2	
	070.7		Load-side encoder initial communication – Transmission data error 3	
	070.A		Load-side encoder initial communication – Process error 1	
	070.B		Load-side encoder initial communication – Process error 2	
	070.C		Load-side encoder initial communication – Process error 3	
	070.D		Load-side encoder initial communication – Process error 4	
	070.E		Load-side encoder initial communication – Process error 5	
	070.F		Load-side encoder initial communication – Process error 6	
	071.1	Load-side encoder normal communication error 1	Load-side encoder normal communication – Receive data error 1	
	071.2		Load-side encoder normal communication – Receive data error 2	
	071.3		Load-side encoder normal communication – Receive data error 3	
	071.5		Load-side encoder normal communication – Transmission data error 1	
	071.6		Load-side encoder normal communication – Transmission data error 2	
	071.7		Load-side encoder normal communication – Transmission data error 3	
	072.1	Load-side encoder normal communication error 2	Load-side encoder data error 1	
	072.2		Load-side encoder data update error	
	072.3		Load-side encoder data waveform error	
	072.4		No load-side encoder signal	
	072.5		Load-side encoder hardware error 1	
	072.6		Load-side encoder hardware error 2	
	082.1	Master-slave operation error 1	Master-slave operation error 1	
	088.1	Watchdog	Watchdog 1-1	
	088.2		Watchdog 1-2	
	088.4		Watchdog 1-4	
	088.8		Watchdog 1-8	

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2000	08E.1	Serial communication error	Serial communication receive error	
	08E.2		Serial communication checksum error	
	08E.3		Serial communication character error	
	08E.4		Serial communication command error	
	08E.5		Serial communication data number error	
	118.1	Encoder diagnosis	Encoder communication circuit diagnosis in progress	
	119.1	Memory error 4	Memory error 4-1	
	119.2		Memory error 4-2	
	119.3		Memory error 4-3	
	119.4		Memory error 4-4	
	119.5		Memory error 4-5	
	119.6		Memory error 4-6	
	119.7		Memory free space error 4-1	
	119.8		Memory free space error 4-2	
	11A.1	Servo motor constant error	Servo motor constant file error	
	11A.2		Servo motor constant file extension error	
	11A.3		Servo motor constant file amount error	
	130.1	Regenerative error 2	Regenerative heat error	
	139.1	Open-phase error	Input open-phase error	
	139.2		Output open-phase error	
	139.3		Motor wiring error	
	17A.1	Load-side linear encoder error 1	Load-side linear encoder error 1-1	
	17A.2		Load-side linear encoder error 1-2	
	17A.3		Load-side linear encoder error 1-3	
	17A.4		Load-side linear encoder error 1-4	
	17A.5		Load-side linear encoder error 1-5	
	17A.6		Load-side linear encoder error 1-6	
	17A.7		Load-side linear encoder error 1-7	
	17A.8		Load-side linear encoder error 1-8	
	188.1	Watchdog 2	Watchdog 2-1	
2100	091.1	Servo amplifier overheat warning	Main circuit device overheat warning	
	092.1	Battery cable disconnection warning	Encoder battery cable disconnection warning	
	092.2		Load-side encoder battery cable disconnection warning	
	092.3		Battery degradation	
	095.1	STO warning	STO1 off detection	
	095.2		STO2 off detection	
	096.1	Home position setting warning	In-position warning at homing	
	096.2		Command input warning at homing	
	09B.1	Excessive error warning	Excessive droop pulse 1 warning	
	09B.3		Excessive droop pulse 2 warning	
	09B.4		Excessive error warning during 0 torque limit	
	09F.1	Battery warning	Low battery	
	09F.2		Battery degradation warning	
	0E0.1	Excessive regeneration warning	Excessive regeneration warning	

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2100	0E1.1	Overload warning 1	Thermal overload warning 1 during operation	
	0E1.2		Thermal overload warning 2 during operation	
	0E1.3		Thermal overload warning 3 during operation	
	0E1.4		Thermal overload warning 4 during operation	
	0E1.5		Thermal overload warning 1 during a stop	
	0E1.6		Thermal overload warning 2 during a stop	
	0E1.7		Thermal overload warning 3 during a stop	
	0E1.8		Thermal overload warning 4 during a stop	
	0E2.1	Servo motor overheat warning	Servo motor temperature warning	
	0E2.2		Servo motor temperature warning 2	
	0E3.2	Absolute position counter warning	Absolute position counter warning	
	0E3.5		Encoder absolute position counter warning	
	0E3.6		Scale measurement encoder absolute position counter warning	
	0E4.1	Parameter warning (Note-1)	Parameter setting range error warning	
	0E6.1	Servo forced stop warning	Forced stop warning	
	0E7.1	Controller forced stop warning	Controller forced stop input warning	
	0E8.1	Decreased cooling fan speed warning	Decreased cooling fan speed	
	0E8.2		Cooling fan stop	
	0E9.1	Main circuit off warning	Servo-on signal on during main circuit off	
	0E9.2		Bus voltage drop during low speed operation	
	0E9.3		Ready-on signal on during main circuit off	
	0EB.1	The other axis error warning	The other axis error warning	
	0EC.1	Overload warning 2	Overload warning 2	
	0ED.1	Output watt excess warning	Output watt excess warning	
	0F0.1	Tough drive warning	Instantaneous power failure tough drive warning	
	0F0.3		Vibration tough drive warning	
	0F2.1	Drive recorder warning	Drive recorder warning 1	
	0F2.2		Drive recorder warning 2	
	0F2.3		Drive recorder warning 3	
	0F2.4		Drive recorder warning 4	
	0F2.5		Drive recorder warning 5	
	0F2.6		Drive recorder warning 6	
	0F3.1	Oscillation detection warning	Oscillation detection warning	
	0F7.1	Machine diagnosis warning	Vibration failure prediction warning	
	0F7.2		Friction failure prediction warning	
	0F7.3		Failure prediction warning based on servo motor total travel distance	
	0F7.4		Gear failure prediction warning	
	0F7.5		Static friction failure prediction warning	
	0F7.6		Belt failure prediction warning	
	19E.4	Network warning 2	SSCNET communication error warning	

(Note-1): Refer to the parameter No. stored in parameter error No. (#8009+20n) for details of the parameter for which the error occurred.

Table 1.3 Servo error (2000 and 2100) list (MR-J5(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2100	1E9.1	Open-phase warning	Input open-phase warning	
	1F8.1	Memory warning 1	Memory writing frequency warning	
	1F8.2		Memory free space warning	

(b) MR-J4(W)-□B

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2010	10.1	Undervoltage	Voltage drop in the control power	
	10.2		Voltage drop in the main circuit power	
2011	11.1	Switch setting error	Axis number setting error/Station number setting error	
	11.2		Disabling control axis setting error	
2012	12.1	Memory error 1 (RAM)	RAM error 1	
	12.2		RAM error 2	
	12.3		RAM error 3	
	12.4		RAM error 4	
	12.5		RAM error 5	
	12.6		RAM error 6	
2013	13.1	Clock error	Clock error 1	
	13.2		Clock error 2	
2014	14.1	Control process error	Control process error 1	
	14.2		Control process error 2	
	14.3		Control process error 3	
	14.4		Control process error 4	
	14.5		Control process error 5	
	14.6		Control process error 6	
	14.7		Control process error 7	
	14.8		Control process error 8	
	14.9		Control process error 9	
	14.A		Control process error 10	
	14.B		Control process error 11	
2015	15.1	Memory error 2 (EEP-ROM)	EEP-ROM error at power on	
	15.2		EEP-ROM error during operation	
	15.4		Home position information read error	
2016	16.1	Encoder initial communication error 1	Encoder initial communication - Receive data error 1	
	16.2		Encoder initial communication - Receive data error 2	
	16.3		Encoder initial communication - Receive data error 3	
	16.4		Encoder initial communication - Encoder malfunction	
	16.5		Encoder initial communication - Transmission data error 1	
	16.6		Encoder initial communication - Transmission data error 2	
	16.7		Encoder initial communication - Transmission data error 3	
	16.8		Encoder initial communication - Incompatible encoder	
	16.A		Encoder initial communication - Process error 1	
	16.B		Encoder initial communication - Process error 2	
	16.C		Encoder initial communication - Process error 3	
	16.D		Encoder initial communication - Process error 4	
	16.E		Encoder initial communication - Process error 5	
	16.F		Encoder initial communication - Process error 6	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2017	17.1	Board error	Board error 1	
	17.3		Board error 2	
	17.4		Board error 3	
	17.5		Board error 4	
	17.6		Board error 5	
	17.7		Board error 7	
	17.8		Board error 6	
	17.9		Board error 8	
2019	19.1	Memory error 3 (Flash-ROM)	Flash-ROM error 1	
	19.2		Flash-ROM error 2	
	19.3		Flash-ROM error 3	
2020	20.1	Encoder normal communication error 1	Encoder normal communication - Receive data error 1	
	20.2		Encoder normal communication - Receive data error 2	
	20.3		Encoder normal communication - Receive data error 3	
	20.5		Encoder normal communication - Transmission data error 1	
	20.6		Encoder normal communication - Transmission data error 2	
	20.7		Encoder normal communication - Transmission data error 3	
	20.9		Encoder normal communication - Receive data error 4	
	20.A		Encoder normal communication - Receive data error 5	
2021	21.1	Encoder normal communication error 2	Encoder error 1	
	21.2		Encoder data update error	
	21.3		Encoder data waveform error	
	21.4		Encoder non-signal error	
	21.5		Encoder hardware error 1	
	21.6		Encoder hardware error 2	
	21.9		Encoder error 2	
2024	24.1	Main circuit error	Ground fault detected at hardware detection circuit	
	24.2		Ground fault detected at software detection function	
2025	25.1	Absolute position erased	Servo motor encoder - Absolute position erased	
	25.2		Scale measurement encoder - Absolute position erased	
2027	27.1	Initial magnetic pole detection error	Initial magnetic pole detection - Abnormal termination	
	27.2		Initial magnetic pole detection - Time out error	
	27.3		Initial magnetic pole detection - Limit switch error	
	27.4		Initial magnetic pole detection - Estimated error	
	27.5		Initial magnetic pole detection - Speed deviation error	
	27.6		Initial magnetic pole detection - Position deviation error	
	27.7		Initial magnetic pole detection - Current error	
2028	28.1	Linear encoder error 2	Linear encoder - Environment error	
2030	30.1	Regenerative error	Regeneration heat error	
	30.2		Regeneration signal error	
	30.3		Regeneration feedback signal error	
2031	31.1	Overspeed	Abnormal motor speed	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2032	32.1	Overcurrent	Overcurrent detected at hardware detection circuit (during operation)	
	32.2		Overcurrent detected at software detection function (during operation)	
	32.3		Overcurrent detected at hardware detection circuit (during a stop)	
	32.4		Overcurrent detected at software detection function (during a stop)	
2033	33.1	Overvoltage	Main circuit voltage error	
2034	34.1	SSCNET receive error 1	SSCNET receive data error	
	34.2		SSCNET connector connection error	
	34.3		SSCNET communication data error	
	34.4		Hardware error signal detection	
	34.5		SSCNET receive data error (safety observation function)	
	34.6		SSCNET communication data error (safety observation function)	
2035	35.1	Command frequency error	Command frequency error	
2036	36.1	SSCNET receive error 2	Continuous communication data error	
	36.2		Continuous communication data error (safety observation function)	
2037 (Note-1)	37.1	Parameter error	Parameter setting range error	
	37.2		Parameter combination error	
	37.3		Point table setting error	
2042	42.1	Servo control error	Servo control error by position deviation	
	42.2		Servo control error by speed deviation	
	42.3		Servo control error by torque/thrust deviation	
	42.8	Fully closed loop control error	Fully closed loop control error by position deviation	
	42.9		Fully closed loop control error by speed deviation	
	42.A		Fully closed loop control error by position deviation (during command stop)	
2045	45.1	Main circuit device overheat	Main circuit device overheat error 1	
	45.2		Main circuit device overheat error 2	
2046	46.1	Servo motor overheat	Abnormal temperature of servo motor 1	
	46.2		Abnormal temperature of servo motor 2	
	46.3		Thermistor disconnected error	
	46.4		Thermistor circuit error	
	46.5		Abnormal temperature of servo motor 3	
	46.6		Abnormal temperature of servo motor 4	
2047	47.1	Cooling fan error	Cooling fan stop error	
	47.2		Cooling fan speed reduction error	
2050	50.1	Overload 1	Thermal overload error 1 during operation	
	50.2		Thermal overload error 2 during operation	
	50.3		Thermal overload error 4 during operation	
	50.4		Thermal overload error 1 during a stop	
	50.5		Thermal overload error 2 during a stop	
	50.6		Thermal overload error 4 during a stop	

(Note-1): Refer to the parameter No. stored in parameter error No. (#8009+20n) for details of the parameter for which the error occurred.

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2051	51.1	Overload 2	Thermal overload error 3 during operation	
	51.2		Thermal overload error 3 during a stop	
2052	52.1	Error excessive	Excess droop pulse 1	
	52.3		Excess droop pulse 2	
	52.4		Error excessive during 0 torque limit	
	52.5		Excess droop pulse 3	
	52.6		Excessive droop pulse at servo-off	
2054	54.1	Oscillation detection	Oscillation detection error	
2056	56.2	Forced stop error	Over speed during forced stop	
	56.3		Estimated distance over during forced stop	
2060	1A.1	Servo motor combination error	Servo motor combination error	
	1A.2		Servo motor control mode combination error	
	1A.4		Servo motor combination error 2	
2061	2A.1	Linear encoder error 1	Linear encoder error 1-1	
	2A.2		Linear encoder error 1-2	
	2A.3		Linear encoder error 1-3	
	2A.4		Linear encoder error 1-4	
	2A.5		Linear encoder error 1-5	
	2A.6		Linear encoder error 1-6	
	2A.7		Linear encoder error 1-7	
	2A.8		Linear encoder error 1-8	
2063	63.1	STO timing error	STO1 off	
	63.2		STO2 off	
	63.5		STO by functional safety unit	
	1E.1	Encoder initial communication error 2	Encoder malfunction	
	1E.2		Load-side encoder malfunction	
2064	64.1	Functional safety unit setting error	STO input error	
	64.2		Compatibility mode setting error	
	64.3		Operation mode setting error	
	1F.1	Encoder initial communication error 3	Incompatible encoder	
	1F.2		Incompatible load-side encoder	
2065	65.1	Functional safety unit connection error	Functional safety unit communication error 1	
	65.2		Functional safety unit communication error 2	
	65.3		Functional safety unit communication error 3	
	65.4		Functional safety unit communication error 4	
	65.5		Functional safety unit communication error 5	
	65.6		Functional safety unit communication error 6	
	65.7		Functional safety unit communication error 7	
	65.8		Functional safety unit shut-off signal error 1	
	65.9		Functional safety unit shut-off signal error 2	
2066	66.1	Encoder initial communication error (safety observation function)	Encoder initial communication - Receive data error 1 (safety observation function)	
	66.2		Encoder initial communication - Receive data error 2 (safety observation function)	
	66.3		Encoder initial communication - Receive data error 3 (safety observation function)	
	66.7		Encoder initial communication - Transmission data error 1 (safety observation function)	
	66.9		Encoder initial communication - Process error 1 (safety observation function)	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2067	67.1	Encoder normal communication error 1 (safety observation function)	Encoder normal communication - Receive data error 1 (safety observation function)	
	67.2		Encoder normal communication - Receive data error 2 (safety observation function)	
	67.3		Encoder normal communication - Receive data error 3 (safety observation function)	
	67.4	Encoder normal communication error 1 (safety observation function)	Encoder normal communication - Receive data error 4 (safety observation function)	
	67.7		Encoder normal communication - Transmission data error 1 (safety observation function)	
2068	68.1	STO diagnosis error	Mismatched STO signal error	
2070	70.1	Load-side encoder initial communication error 1	Load-side encoder initial communication - Receive data error 1	
	70.2		Load-side encoder initial communication - Receive data error 2	
	70.3		Load-side encoder initial communication - Receive data error 3	
	70.4		Load-side encoder initial communication - Encoder malfunction	
	70.5		Load-side encoder initial communication - Transmission data error 1	
	70.6		Load-side encoder initial communication - Transmission data error 2	
	70.7		Load-side encoder initial communication - Transmission data error 3	
	70.8		Load-side encoder initial communication - Incompatible encoder	
	70.A		Load-side encoder initial communication - Process error 1	
	70.B		Load-side encoder initial communication - Process error 2	
	70.C		Load-side encoder initial communication - Process error 3	
	70.D		Load-side encoder initial communication - Process error 4	
	70.E		Load-side encoder initial communication - Process error 5	
	70.F		Load-side encoder initial communication - Process error 6	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2071	71.1	Load-side encoder normal communication error 1	Load-side encoder communication - Receive data error 1	
	71.2		Load-side encoder communication - Receive data error 2	
	71.3		Load-side encoder communication - Receive data error 3	
	71.5		Load-side encoder communication - Transmission data error 1	
	71.6		Load-side encoder communication - Transmission data error 2	
	71.7		Load-side encoder communication - Transmission data error 3	
	71.9		Load-side encoder communication - Transmission data error 4	
	71.A		Load-side encoder communication - Transmission data error 5	
2072	72.1	Load-side encoder normal communication error 2	Load-side encoder data error 1	
	72.2		Load-side encoder data update error	
	72.3		Load-side encoder data waveform error	
	72.4		Load-side encoder non-signal error	
	72.5		Load-side encoder hardware error 1	
	72.6		Load-side encoder hardware error 2	
	72.9		Load-side encoder data error 2	
2079	79.1	Functional safety unit diagnosis error	Functional safety unit power voltage error	
	79.2		Functional safety unit internal error	
	79.3		Abnormal temperature of functional safety unit	
	79.4		Servo amplifier error	
	79.5		Input device error	
	79.6		Output device error	
	79.7		Mismatched input signal error	
	79.8		Position feedback fixing error	
2082	82.1	Master-slave operation error 1	Master-slave operation error 1	
2088	888	Watchdog	Watchdog	
2091	91.1	Servo amplifier overheat warning	Main circuit device overheat warning	
2095	95.1	STO warning	STO1 off detection	
	95.2		STO2 off detection	
	95.3		STO warning 1 (safety observation function)	
	95.4		STO warning 2 (safety observation function)	
	95.5		STO warning 3 (safety observation function)	
2102	92.1	Battery cable disconnection warning	Encoder battery cable disconnection warning	
	92.3		Battery degradation	
2106	96.1	Home position setting warning	In-position warning at home positioning	
	96.2		Command input warning at home positioning	
	96.3		Servo off warning at home positioning	
	96.4		Home positioning warning during magnetic pole detection	
2116	9F.1	Battery warning	Low battery	
	9F.2		Battery degradation warning	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2140	E0.1	Excessive regeneration warning	Excessive regeneration warning	
2141	E1.1	Overload warning 1	Thermal overload warning 1 during operation	
	E1.2		Thermal overload warning 2 during operation	
	E1.3		Thermal overload warning 3 during operation	
	E1.4		Thermal overload warning 4 during operation	
	E1.5		Thermal overload error 1 during a stop	
	E1.6		Thermal overload error 2 during a stop	
	E1.7		Thermal overload error 3 during a stop	
	E1.8		Thermal overload error 4 during a stop	
2142	E2.1	Servo motor overheat warning	Servo motor temperature warning	
2143	E3.1	Absolute position counter warning	Multi-revolution counter travel distance excess warning	
	E3.2		Absolute position counter warning	
	E3.4		Absolute positioning counter EEP-ROM writing frequency warning	
	E3.5		Encoder absolute positioning counter warning	
2144 (Note-1)	E4.1	Parameter warning	Parameter setting range error warning	
2146	E6.1	Servo forced stop warning	Forced stop warning	
	E6.2		SS1 forced stop warning 1 (safety observation function)	
	E6.3		SS1 forced stop warning 2 (safety observation function)	
2147	E7.1	Controller forced stop warning	Controller forced stop warning	
2148	E8.1	Cooling fan speed reduction warning	Decreased cooling fan speed warning	
	E8.2		Cooling fan stop	
2149	E9.1	Main circuit off warning	Servo-on signal on during main circuit off	
	E9.2		Bus voltage drop during low speed operation	
	E9.3		Ready-on signal on during main circuit off	
	E9.4		Converter unit forced stop	
2151	EB.1	The other axis error warning	The other axis error warning	
2152	EC.1	Overload warning 2	Overload warning 2	
2153	ED.1	Output watt excess warning	Output watt excess warning	
2160	F0.1	Tough drive warning	Instantaneous power failure tough drive warning	
	F0.3		Vibration tough drive warning	
2162	F2.1	Drive recorder - Miswriting warning	Drive recorder - Area writing time-out warning	
	F2.2		Drive recorder - Data miswriting warning	
2163	F3.1	Oscillation detection warning	Oscillation detection warning	
2167	F7.1	Machine diagnosis warning	Vibration failure prediction warning	
	F7.2		Friction failure prediction warning	
	F7.3		Total travel distance failure prediction warning	
2907	1B.1	Converter error	Converter unit error	
2913	2B.1	Encoder counter error	Encoder counter error 1	
	2B.2		Encoder counter error 2	

(Note-1): Refer to the parameter No. stored in parameter error No. (#8009+20n) for details of the parameter for which the error occurred.

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2918	3A.1	Inrush current suppression circuit error	Inrush current suppression circuit error	
2921	3D.1	Parameter setting error for driver communication	Parameter combination error for driver communication on slave	
	3D.2		Parameter combination error for driver communication on master	
2922	3E.1	Operation mode error	Operation mode error	
	3E.6		Operation mode switch error	
2942	7A.1	Parameter setting error (safety observation function)	Parameter verification error (safety observation function)	
	7A.2		Parameter setting range error (safety observation function)	
	7A.3		Parameter combination error (safety observation function)	
	7A.4		Functional safety unit combination error (safety observation function)	
2943	7B.1	Encoder diagnosis error (safety observation function)	Encoder diagnosis error 1 (safety observation function)	
	7B.2		Encoder diagnosis error 2 (safety observation function)	
	7B.3		Encoder diagnosis error 3 (safety observation function)	
	7B.4		Encoder diagnosis error 4 (safety observation function)	
2944	7C.1	Functional safety unit communication diagnosis error (safety observation function)	Functional safety unit communication cycle error (safety observation function)	
	7C.2		Functional safety unit communication data error (safety observation function)	
2945	7D.1	Safety observation error	Stop observation error	
	7D.2		Speed observation error	
2948	8A.1	USB communication time-out error/serial communication time-out error/Modbus-RTU communication time-out error	USB communication time-out error/serial communication time-out error	
	8A.2		Modbus-RTU communication time-out error	
2952	8E.1	USB communication error/serial communication error/Modbus-RTU communication error	USB communication receive error/serial communication receive error	
	8E.2		USB communication checksum error/serial communication checksum error	
	8E.3		USB communication character error/serial communication character error	
	8E.4		USB communication command error/serial communication command error	
	8E.5		USB communication data number error/serial communication data number error	
	8E.6		Modbus-RTU communication receive error	
	8E.7		Modbus-RTU communication message frame error	
	8E.8		Modbus-RTU communication CRC error	

Table 1.4 Servo error (2000 to 2999) list (MR-J4(W)-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2955	9B.1	Error excessive warning	Excess droop pulse 1 warning	
	9B.3		Excess droop pulse 2 warning	
	9B.4		Error excessive warning during 0 torque limit	
2956	9C.1	Converter error	Converter unit error	

(c) MR-J3-□B

Table 1.5 Servo error (2000 to 2999) list (MR-J3-□B)

Error code	Servo amplifier LED display (Note-1)	Name	Remarks
2010	10	Undervoltage	
2012	12	Memory error 1 (RAM)	
2013	13	Clock error	
2015	15	Memory error 2 (EEP-ROM)	
2016	16	Encoder error 1 (At power on)	
2017	17	Board error	
2019	19	Memory error 3 (Flash ROM)	
2020	20	Encoder error 2 (During runtime)	
2021	21	Encoder error 3 (During runtime)	
2024	24	Main circuit error	
2025	25	Absolute position erase	
2030	30	Regenerative error	
2031	31	Overspeed	
2032	32	Overcurrent	
2033	33	Overvoltage	
2034	34	Receive error 1	
2035	35	Command frequency error	
2036	36	Receive error 2	
2045	45	Main circuit device overheat	
2046	46	Servo motor overheat	
2047	47	Cooling fan error	
2050	50	Overload 1	
2051	51	Overload 2	
2052	52	Error excessive	
2060	1A	Motor combination error	
2082	82	Master/slave operation error 1	
2088	888	Watchdog	
2102	92	Battery cable disconnection warning	
2106	96	Home position setting warning	
2116	9F	Battery warning	
2140	E0	Excessive regeneration warning	
2141	E1	Overload warning 1	
2143	E3	Absolute position counter warning	
2146	E6	Servo forced stop warning	
2147	E7	Controller forced stop warning	
2148	E8	Cooling fan speed reduction warning	
2149	E9	Main circuit off warning	
2152	EC	Overload warning 2	
2153	ED	Output watt excess warning	
2301 to 2599	E4	Parameter warning (Refer to the table 1.6)	
2601 to 2899	37	Parameter error (Refer to the table 1.6)	

(Note-1): The LED display is different when using the servo amplifiers with a large capacity. Refer to the "Servo amplifier Instruction Manual" for details.

Table 1.5 Servo error (2000 to 2999) list (MR-J3-□B) (Continued)

Error code	Servo amplifier LED display (Note-1)	Name	Remarks
2907 (Note-2)	1B	Converter alarm	
2921 (Note-2)	3D	Driver communication parameter setting error	
2948 (Note-2)	8A	USB communication time-out error	
2952 (Note-2)	8E	USB communication error	
2956 (Note-2)	9C	Converter warning	

(Note-1): The LED display is different when using the servo amplifiers with a large capacity. Refer to the "Servo amplifier Instruction Manual" for details.

(Note-2): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2021	2907	1B	Converter alarm
2043	2921	3D	Driver communication parameter setting error
2090	2948	8A	USB communication time-out error
2094	2952	8E	USB communication error
2102	2956	9C	Converter warning

Table 1.6 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	Control mode
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Rotation direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	For manufacturer setting
2317	2617	PA17	
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Ratio of load inertia moment to servo motor inertia moment
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	Overshoot amount compensation
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch shape selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch shape selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting

Error code		Parameter No.	Name
2339	2639	PB20	Vibration suppression control resonance frequency setting
2340	2640	PB21	For manufacturer setting
2341	2641	PB22	
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain changing ratio of load inertia moment to servo motor inertia moment
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	Vibration suppression control filter 2
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	Function selection C-1
2369	2669	PC05	Function selection C-2
2370	2670	PC06	Function selection C-3
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset

(Note): The details are different when using the servo amplifiers with a large capacity. Refer to the "Servo amplifier Instruction Manual" for details.

Table 1.6 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2377	2677	PC13	Analog monitor feedback position output standard data Low
2378	2678	PC14	Analog monitor feedback position output standard data High
2379	2679	PC15	For manufacturer setting
2380	2680	PC16	Function selection C-3A
2381	2681	PC17	Function selection C-4
2382	2682	PC18	For manufacturer setting
2383	2683	PC19	
2384	2684	PC20	Function selection C-7
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	
2389	2689	PC25	
2390	2690	PC26	
2391	2691	PC27	
2392	2692	PC28	
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	
2396	2696	PC32	
2397	2697	PD01	
2398	2698	PD02	
2399	2699	PD03	
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-13)
2404	2704	PD08	Output signal device selection 2 (CN3-9)
2405	2705	PD09	Output signal device selection 3 (CN3-15)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	Driver communication setting
2412	2712	PD16	Driver communication setting Master transmit data selection1
2413	2713	PD17	Driver communication setting Master transmit data selection2
2414	2714	PD18	For manufacturer setting
2415	2715	PD19	

Error code		Parameter No.	Name
2416	2716	PD20	Driver communication setting Master axis No. selection1 for slave
2417	2717	PD21	For manufacturer setting
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	
2421	2721	PD25	
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	
2425	2725	PD29	
2426	2726	PD30	Master-slave operation - Torque command coefficient on slave
2427	2727	PD31	Master-slave operation - Speed limit coefficient on slave
2428	2728	PD32	Master-slave operation - Speed limit adjustment value on slave
2429	2729	PE01	For manufacturer setting
2430	2730	PE02	
2431	2731	PE03	
2432	2732	PE04	
2433	2733	PE05	
2434	2734	PE06	
2435	2735	PE07	
2436	2736	PE08	
2437	2737	PE09	
2438	2738	PE10	
2439	2739	PE11	
2440	2740	PE12	
2441	2741	PE13	
2442	2742	PE14	
2443	2743	PE15	
2444	2744	PE16	
2445	2745	PE17	
2446	2746	PE18	
2447	2747	PE19	
2448	2748	PE20	
2449	2749	PE21	
2450	2750	PE22	
2451	2751	PE23	
2452	2752	PE24	
2453	2753	PE25	
2454	2754	PE26	Filter coefficient 2-1

(Note): The details are different when using the servo amplifiers with a large capacity.
Refer to the "Servo amplifier Instruction Manual" for details.

Table 1.6 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2455	2755	PE27	Filter coefficient 2-2
2456	2756	PE28	Filter coefficient 2-3
2457	2757	PE29	Filter coefficient 2-4
2458	2758	PE30	Filter coefficient 2-5
2459	2759	PE31	Filter coefficient 2-6
2460	2760	PE32	Filter coefficient 2-7
2461	2761	PE33	Filter coefficient 2-8

Error code		Parameter No.	Name
2462	2762	PE34	For manufacturer setting
2463	2763	PE35	
2464	2764	PE36	
2465	2765	PE37	
2466	2766	PE38	
2467	2767	PE39	
2468	2768	PE40	

(Note): The details are different when using the servo amplifiers with a large capacity. Refer to the "Servo amplifier Instruction Manual" for details.

(d) MR-J3W-□B

Table 1.7 Servo error (2000 to 2999) list (MR-J3W-□B)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2010	10.1	Undervoltage	Voltage drop in the control circuit power supply	
	10.2		Voltage drop in the main circuit power	
2011	11.1	Switch setting error	Rotary switch setting error	
	11.2		DIP switch setting error	
	11.3		Servo motor selection switch setting error	
	11.4		Servo motor selection switch setting error 2	
2012	12.1	Memory error 1 (RAM)	CPU built-in RAM error	
	12.2		CPU data RAM error	
	12.3		Custom IC RAM error	
2013	13.1	Clock error	Clock error	
2015	15.1	Memory error 2 (EEP-ROM)	EEP-ROM error at power on	
	15.2		EEP-ROM error during operation	
2016	16.1	Encoder initial communication error 1	Encoder receive data error 1	
	16.2		Encoder receive data error 2	
	16.3		Encoder receive data error 3	
	16.5		Encoder transmission data error 1	
	16.6		Encoder transmission data error 2	
	16.7		Encoder transmission data error 3	
2017	17.1	Board error	AD converter error	
	17.2		Current feedback data error	
	17.3		Custom IC error	
	17.4		Amplifier detection signal error	
	17.5		Rotary switch error	
	17.6		DIP switch error	
2019	19.1	Memory error 3 (Flash ROM)	Flash-ROM error 1	
	19.2		Flash-ROM error 2	
2020	20.1	Encoder normal communication error 1	Encoder receive data error 1	
	20.2		Encoder receive data error 2	
	20.3		Encoder receive data error 3	
	20.5		Encoder transmission data error 1	
	20.6		Encoder transmission data error 2	
	20.7		Encoder transmission data error 3	
2021	21.1	Encoder normal communication error 2	Encoder data error	
	21.2		Encoder data update error	
	21.3		Encoder waveform error	Direct drive motor use
2024	24.1	Main circuit error	Ground fault detected at hardware detection circuit	
	24.2		Ground fault detected at software detection function	
2025	25.1	Absolute position erase	Absolute position data erase	
2027	27.1	Initial magnetic pole detection error	Magnetic pole detection abnormal termination	Linear servo motor/ direct drive motor use
	27.2		Magnetic pole detection time out error	
	27.3		Magnetic pole detection limit switch error	
	27.4		Magnetic pole detection estimated error	
	27.5		Magnetic pole detection position deviation error	
	27.6		Magnetic pole detection speed deviation error	
	27.7		Magnetic pole detection current error	
2028	28.1	Linear encoder error 2	Linear encoder environment error	Linear servo motor use

Table 1.7 Servo error (2000 to 2999) list (MR-J3W-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2030	30.1	Regenerative error	Regeneration heat error	
	30.2		Regenerative transistor error	
	30.3		Regenerative transistor feedback data error	
2031	31.1	Overspeed	Abnormal motor speed (Note-1), (Note-2)	
2032	32.1	Overcurrent	Overcurrent detected at hardware detection circuit (during operation).	
	32.2		Overcurrent detected at software detection function (during operation).	
	32.3		Overcurrent detected at hardware detection circuit (during a stop).	
	32.4		Overcurrent detected at software detection function (during a stop).	
2033	33.1	Overvoltage	Main circuit voltage error	
2034	34.1	SSCNET receive error 1	SSCNET receive data error	
	34.2		SSCNET communication connector connection error	
	34.3		Communication data error	
	34.4		Hardware error signal detection	
2035	35.1	Command frequency error	Command frequency error	
2036	36.1	SSCNET receive error 2	Continuous communication data error	
2042	42.1	Linear servo control error	Linear servo control error on the positioning detection	Linear servo motor use
		Servo control error	Servo control error due to position deviation	Direct drive motor use
	42.2	Linear servo control error	Linear servo control error on the speed detection	Linear servo motor use
		Servo control error	Servo control error due to speed deviation	Direct drive motor use
	42.3	Linear servo control error	Linear servo control error on the thrust detection	Linear servo motor use
		Servo control error	Servo control error due to torque detection	Direct drive motor use
2045	45.1	Main circuit device overheat	Main circuit abnormal temperature	
	45.2		Board temperature error	
2046	46.1	Servo motor overheat (Note-2)	Abnormal temperature of servo motor	
	46.2		Linear servo motor thermal sensor error	Linear servo motor use
			Direct drive motor thermal sensor error	Direct drive motor use
	46.3		Thermistor wires are not connected error	Linear servo motor/direct drive motor use
2047	47.1	Cooling fan error	Cooling fan stop error	
	47.2		Decreased cooling fan speed error	
2050	50.1	Overload 1	Thermal overload error 1 during operation	
	50.2		Thermal overload error 2 during operation	
	50.3		Thermal overload error 4 during operation	
	50.4		Thermal overload error 1 during a stop	
	50.5		Thermal overload error 2 during a stop	
	50.6		Thermal overload error 4 during a stop	

(Note-1): The name is different when using the linear servo motors. Refer to the "Servo amplifier Instruction Manual" for details.
(Note-2): The name is different when using the direct drive motors. Refer to the "Servo amplifier Instruction Manual" for details.

Table 1.7 Servo error (2000 to 2999) list (MR-J3W-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2051	51.1	Overload 2	Thermal overload error 3 during operation	
	51.2		Thermal overload error 3 during a stop	
2052	52.3	Error excessive	Excess droop pulse (Note-1), (Note-2)	
	52.4		Maximum deviation at 0 torque limit (Note-1), (Note-2)	
2060	1A.1	Motor combination error	Motor combination error	
2061	2A.1	Linear encoder error 1	Linear encoder side error 1	Linear servo motor use
	2A.2		Linear encoder side error 2	
	2A.3		Linear encoder side error 3	
	2A.4		Linear encoder side error 4	
	2A.5		Linear encoder side error 5	
	2A.6		Linear encoder side error 6	
	2A.7		Linear encoder side error 7	
	2A.8		Linear encoder side error 8	
2063 (Note-3)	1E.1	Encoder initial communication error 2	Encoder failure	
2064 (Note-3)	1F.1	Encoder initial communication error 3	Incompatible encoder	
2088	888	Watchdog	—	
2101 (Note-3)	91.1	Main circuit device overheat warning	Main circuit device overheat warning	
	91.2		Board temperature warning	
2102	92.1	Battery cable disconnection warning	Encoder battery disconnection warning signal detection	
2106	96.1	Home position setting warning	In-position error at home positioning	
	96.2		Command input error at home positioning	
2116	9F.1	Battery warning	Low battery	
2140	E0.1	Excessive regeneration warning	Excessive regeneration warning	
2141	E1.1	Overload warning 1	Thermal overload warning 1 during operation	
	E1.2		Thermal overload warning 2 during operation	
	E1.3		Thermal overload warning 3 during operation	
	E1.4		Thermal overload warning 4 during operation	
	E1.5		Thermal overload warning 1 during a stop	
	E1.6		Thermal overload warning 2 during a stop	
	E1.7		Thermal overload warning 3 during a stop	
	E1.8		Thermal overload warning 4 during a stop	
2142	E2.1	Linear servo motor overheat warning	Linear servo motor overheat warning	Linear servo motor use
		Direct drive motor overheat warning	Direct drive motor overheat warning	Direct drive motor use

(Note-1): The name is different when using the linear servo motors. Refer to the "Servo amplifier Instruction Manual" for details.
(Note-2): The name is different when using the direct drive motors. Refer to the "Servo amplifier Instruction Manual" for details.
(Note-3): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2024	2063	1E	Encoder initial communication error 2
2025	2064	1F	Encoder initial communication error 3
2091	2101	91	Main circuit device overheat warning

Table 1.7 Servo error (2000 to 2999) list (MR-J3W-□B) (Continued)

Error code	Servo amplifier LED display	Name	Details name	Remarks
2143	E3.1	Absolute position counter warning	The multi-revolution counter travel distance excess warning	
	E3.2		Absolute positioning counter error	
2146	E6.1	Servo forced stop warning	Servo forced stop warning	
2147	E7.1	Controller forced stop warning	Controller forced stop warning	
2148	E8.1	Cooling fan speed reduction warning	Decreased cooling fan speed warning	
2149	E9.1	Main circuit off warning	Ready-on signal on at main circuit off	
	E9.2		Bus voltage drop during low speed operation (Note-1)	
	E9.3		Servo-on signal on at main circuit off	
2151	EB.1	The other axis fault warning	The other axis fault warning	
2152	EC.1	Overload warning 2	Overload warning 2	
2153	ED.1	Output watt excess warning	Output watt excess	
2301 to 2599	E4.1	Parameter warning (Refer to the table 1.8)	Parameter setting range error warning	
2601 to 2899	37.1	Parameter error (Refer to the table 1.8)	Parameter setting range error	
	37.2		Parameter combination error	
2913 (Note-3)	2B.1	Encoder counter error	Encoder counter error 1	Direct drive motor use
	2B.2		Encoder counter error 2	
2948 (Note-3)	8A.1	USB communication time-out error	USB communication time-out error	
2952 (Note-3)	8E.1	USB communication error	USB communication receive error	
	8E.2		USB communication checksum error	
	8E.3		USB communication character error	
	8E.4		USB communication command error	
	8E.5		USB communication data No. error	

(Note-1): The name is different when using the linear servo motors. Refer to the "Servo amplifier Instruction Manual" for details.
(Note-2): The name is different when using the direct drive motors. Refer to the "Servo amplifier Instruction Manual" for details.
(Note-3): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2031	2913	2B	Encoder counter error
2090	2948	8A	USB communication time-out error
2094	2958	8E	USB communication error

Table 1.8 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	Control mode
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Rotation direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	Encoder output pulse 2
2317	2617	PA17	For manufacturer setting
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Ratio of load inertia moment to servo motor inertia moment
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	For manufacturer setting
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch shape selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch shape selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting
2339	2639	PB20	Vibration suppression control resonance frequency setting

Error code		Parameter No.	Name
2340	2640	PB21	For manufacturer setting
2341	2641	PB22	
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain changing ratio of load inertia moment to servo motor inertia moment
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	Function selection C-1
2369	2669	PC05	Function selection C-2
2370	2670	PC06	Function selection C-3
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset
2377	2677	PC13	For manufacturer setting
2378	2678	PC14	

Table 1.8 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2379	2679	PC15	Station number selection
2380	2680	PC16	For manufacturer setting
2381	2681	PC17	Function selection C-4
2382	2682	PC18	For manufacturer setting
2383	2683	PC19	
2384	2684	PC20	
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	
2389	2689	PC25	
2390	2690	PC26	
2391	2691	PC27	
2392	2692	PC28	
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	
2396	2696	PC32	
2397	2697	PD01	
2398	2698	PD02	
2399	2699	PD03	
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-12 for A-axis and CN3-25 for B-axis)
2404	2704	PD08	For manufacturer setting
2405	2705	PD09	Output signal device selection 3 (CN3-11 for A-axis and CN3-24 for B-axis)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	For manufacturer setting

Error code		Parameter No.	Name
2412	2712	PD16	For manufacturer setting
2413	2713	PD17	
2414	2714	PD18	
2415	2715	PD19	
2416	2716	PD20	
2417	2717	PD21	
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	
2421	2721	PD25	
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	
2425	2725	PD29	
2426	2726	PD30	
2427	2727	PD31	
2428	2728	PD32	
2485	2785	Po01	Function selection O-1
2486	2786	Po02	Axis selection for graphing analog data (MR Configurator)
2487	2787	Po03	Axis selection for graphing digital data (MR Configurator)
2488	2788	Po04	Function selection O-2
2489	2789	Po05	For manufacturer setting
2490	2790	Po06	
2491	2791	Po07	
2492	2792	Po08	
2493	2793	Po09	
2494	2794	Po10	
2495	2795	Po11	
2496	2796	Po12	
2497	2797	Po13	
2498	2798	Po14	
2499	2799	Po15	
2500	2800	Po16	

(e) MR-J3-□B-RJ004 (For linear servo)

Table 1.9 Servo error (2000 to 2999) list (MR-J3-□B-RJ004)

Error code	Servo amplifier LED display	Name	Remarks
2010	10	Undervoltage	
2012	12	Memory error 1 (RAM)	
2013	13	Clock error	
2015	15	Memory error 2 (EEP-ROM)	
2016	16	Encoder error 1 (At power on)	
2017	17	Board error	
2019	19	Memory error 3 (Flash ROM)	
2020	20	Encoder error 2	
2021	21	Encoder error 3	
2024	24	Main circuit error	
2027	27	Initial magnetic pole detection error	
2028	28	Linear encoder error 2	
2030	30	Regenerative error	
2031	31	Overspeed	
2032	32	Overcurrent	
2033	33	Overvoltage	
2034	34	Receive error 1	
2035	35	Command frequency alarm	
2036	36	Receive error 2	
2042	42	Linear servo control error	
2045	45	Main circuit device overheat	
2046	46	Linear servo motor overheat	
2047	47	Cooling fan alarm	
2050	50	Overload 1	
2051	51	Overload 2	
2052	52	Error excessive	
2061	2A	Linear encoder error 1	
2088	888	Watchdog	
2106	96	Home position setting error	
2140	E0	Excessive regeneration warning	
2141	E1	Overload warning 1	
2142	E2	Linear servo motor overheat warning	
2146	E6	Servo forced stop warning	
2147	E7	Controller emergency stop warning	
2148	E8	Cooling fan speed reduction warning	
2149	E9	Main circuit off warning	
2152	EC	Overload warning 2	
2153	ED	Output watt excess warning	
2301 to 2599	E4	Parameter warning (Refer to the table 1.10)	
2601 to 2899	37	Parameter error (Refer to the table 1.10)	

Table 1.9 Servo error (2000 to 2999) list (MR-J3-□B-RJ004) (Continued)

Error code	Servo amplifier LED display	Name	Remarks
2948 (Note-1)	8A	USB communication time-out error	
2952 (Note-1)	8E	USB communication error	

(Note-1): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2090	2948	8A	USB communication time-out error
2094	2952	8E	USB communication error

Table 1.10 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	For manufacturer setting
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Moving direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	Encoder output pulse 2
2317	2617	PA17	For manufacturer setting
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Load mass ratio to the linear servo motor primary side (coil)
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	For manufacturer setting
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch form selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch form selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting
2339	2639	PB20	Vibration suppression control resonance frequency setting
2340	2640	PB21	For manufacturer setting

Error code		Parameter No.	Name
2341	2641	PB22	For manufacturer setting
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain load mass ratio to the linear servo motor primary side (coil)
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	Vibration suppression control filter 2
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	For manufacturer setting
2369	2669	PC05	
2370	2670	PC06	
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset
2377	2677	PC13	For manufacturer setting
2378	2678	PC14	
2379	2679	PC15	
2380	2680	PC16	

Table 1.10 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2381	2681	PC17	Function selection C-4
2382	2682	PC18	For manufacturer setting
2383	2683	PC19	
2384	2684	PC20	
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	
2389	2689	PC25	
2390	2690	PC26	Function selection C-8
2391	2691	PC27	Function selection C-9
2392	2692	PC28	For manufacturer setting
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	
2396	2696	PC32	
2397	2697	PD01	
2398	2698	PD02	Input signal automatic ON selection
2399	2699	PD03	For manufacturer setting
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-13)
2404	2704	PD08	Output signal device selection 2 (CN3-9)
2405	2705	PD09	Output signal device selection 3 (CN3-15)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	For manufacturer setting
2412	2712	PD16	
2413	2713	PD17	
2414	2714	PD18	
2415	2715	PD19	
2416	2716	PD20	
2417	2717	PD21	
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	
2421	2721	PD25	
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	
2425	2725	PD29	
2426	2726	PD30	

Error code		Parameter No.	Name
2427	2727	PD31	For manufacturer setting
2428	2728	PD32	
2429	2729	PE01	
2430	2730	PE02	
2431	2731	PE03	
2432	2732	PE04	
2433	2733	PE05	
2434	2734	PE06	
2435	2735	PE07	
2436	2736	PE08	
2437	2737	PE09	
2438	2738	PE10	
2439	2739	PE11	
2440	2740	PE12	
2441	2741	PE13	
2442	2742	PE14	
2443	2743	PE15	
2444	2744	PE16	
2445	2745	PE17	
2446	2746	PE18	
2447	2747	PE19	
2448	2748	PE20	
2449	2749	PE21	
2450	2750	PE22	
2451	2751	PE23	
2452	2752	PE24	
2453	2753	PE25	
2454	2754	PE26	Filter coefficient 2-1
2455	2755	PE27	Filter coefficient 2-2
2456	2756	PE28	Filter coefficient 2-3
2457	2757	PE29	Filter coefficient 2-4
2458	2758	PE30	Filter coefficient 2-5
2459	2759	PE31	Filter coefficient 2-6
2460	2760	PE32	Filter coefficient 2-7
2461	2761	PE33	Filter coefficient 2-8
2462	2762	PE34	For manufacturer setting
2463	2763	PE35	
2464	2764	PE36	
2465	2765	PE37	
2466	2766	PE38	
2467	2767	PE39	
2468	2768	PE40	
2501	2801	PS01	Linear function selection 1
2502	2802	PS02	Linear encoder resolution setting Numerator
2503	2803	PS03	Linear encoder resolution setting Denominator
2504	2804	PS04	Linear function selection 2

Table 1.10 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2505	2805	PS05	Linear servo motor control position deviation error detection level
2506	2806	PS06	Linear servo motor control speed deviation error detection level
2507	2807	PS07	Linear servo motor control thrust deviation error detection level
2508	2808	PS08	Linear function selection 3
2509	2809	PS09	Magnetic pole detection voltage level
2510	2810	PS10	At magnetic pole detection current detection method Identification signal frequency
2511	2811	PS11	At magnetic pole detection current detection method Identification signal amplitude
2512	2812	PS12	For manufacturer setting
2513	2813	PS13	
2514	2814	PS14	
2515	2815	PS15	
2516	2816	PS16	
2517	2817	PS17	
2518	2818	PS18	

Error code		Parameter No.	Name
2519	2819	PS19	For manufacturer setting
2520	2820	PS20	
2521	2821	PS21	
2522	2822	PS22	
2523	2823	PS23	
2524	2824	PS24	
2525	2825	PS25	
2526	2826	PS26	
2527	2827	PS27	
2528	2828	PS28	
2529	2829	PS29	
2530	2830	PS30	
2531	2831	PS31	
2532	2832	PS32	

(f) MR-J3-□B-RJ006 (For fully closed control)

Table 1.11 Servo error (2000 to 2999) list (MR-J3-□B-RJ006)

Error code	Servo amplifier LED display	Name	Remarks
2010	10	Undervoltage	
2012	12	Memory error 1 (RAM)	
2013	13	Clock error	
2015	15	Memory error 2 (EEP-ROM)	
2016	16	Encoder error 1 (At power on)	
2017	17	Board error	
2019	19	Memory error 3 (Flash ROM)	
2020	20	Encoder error 2 (During runtime)	
2021	21	Encoder error 3 (During runtime)	
2024	24	Main circuit error	
2028	28	Linear encoder error 2	
2030	30	Regenerative error	
2031	31	Overspeed	
2032	32	Overcurrent	
2033	33	Overvoltage	
2034	34	Receive error 1	
2035	35	Command frequency alarm	
2036	36	Receive error 2	
2042	42	Fully closed control error detection	
2045	45	Main circuit device overheat	
2046	46	Servo motor overheat	
2047	47	Cooling fan alarm	
2050	50	Overload 1	
2051	51	Overload 2	
2052	52	Error excessive	
2060	1A	Motor combination error	
2061	2A	Linear encoder error 1	
2070	70	Load side encoder error 1	
2071	71	Load side encoder error 2	
2088	888	Watchdog	
2106	96	Home position setting error	
2140	E0	Excessive regeneration warning	
2141	E1	Overload warning 1	
2146	E6	Servo forced stop warning	
2147	E7	Controller emergency stop warning	
2148	E8	Cooling fan speed reduction warning	
2149	E9	Main circuit off warning	
2152	EC	Overload warning 2	
2153	ED	Output watt excess warning	
2301 to 2599	E4	Parameter warning (Refer to the table 1.12)	
2601 to 2899	37	Parameter error (Refer to the table 1.12)	

Table 1.11 Servo error (2000 to 2999) list (MR-J3-□B-RJ006) (Continued)

Error code	Servo amplifier LED display	Name	Remarks
2948 (Note-1)	8A	USB communication time-out error	
2952 (Note-1)	8E	USB communication error	

(Note-1): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2090	2948	8A	USB communication time-out error
2094	2952	8E	USB communication error

Table 1.12 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	Control mode
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Rotation direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	Encoder output pulse 2
2317	2617	PA17	For manufacturer setting
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Ratio of load inertia moment to servo motor inertia moment
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	Overshoot amount compensation
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch shape selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch shape selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting
2339	2639	PB20	Vibration suppression control resonance frequency setting
2340	2640	PB21	For manufacturer setting

Error code		Parameter No.	Name
2341	2641	PB22	For manufacturer setting
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain changing ratio of load inertia moment to servo motor inertia moment
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	Vibration suppression control filter 2
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	Function selection C-1
2369	2669	PC05	Function selection C-2
2370	2670	PC06	Function selection C-3
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset
2377	2677	PC13	For manufacturer setting
2378	2678	PC14	
2379	2679	PC15	
2380	2680	PC16	Function selection C-3A

Table 1.12 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2381	2681	PC17	Function selection C-4
2382	2682	PC18	For manufacturer setting
2383	2683	PC19	
2384	2684	PC20	Function selection C-7
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	
2389	2689	PC25	
2390	2690	PC26	Function selection C-8
2391	2691	PC27	Function selection C-9
2392	2692	PC28	For manufacturer setting
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	
2396	2696	PC32	
2397	2697	PD01	
2398	2698	PD02	
2399	2699	PD03	
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-13)
2404	2704	PD08	Output signal device selection 2 (CN3-9)
2405	2705	PD09	Output signal device selection 3 (CN3-15)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	For manufacturer setting
2412	2712	PD16	
2413	2713	PD17	
2414	2714	PD18	
2415	2715	PD19	
2416	2716	PD20	
2417	2717	PD21	
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	
2421	2721	PD25	
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	

Error code		Parameter No.	Name
2425	2725	PD29	For manufacturer setting
2426	2726	PD30	
2427	2727	PD31	
2428	2728	PD32	
2429	2729	PE01	Fully closed loop selection 1
2430	2730	PE02	For manufacturer setting
2431	2731	PE03	Fully closed loop selection 2
2432	2732	PE04	Fully closed loop feedback pulse electronic 1 gear numerator
2433	2733	PE05	Fully closed loop feedback pulse electronic gear 1 denominator
2434	2734	PE06	Fully closed loop control speed deviation error detection level
2435	2735	PE07	Fully closed loop control position deviation error detection level
2436	2736	PE08	Fully closed loop dual feedback filter
2437	2737	PE09	For manufacturer setting
2438	2738	PE10	Fully closed loop selection 3
2439	2739	PE11	For manufacturer setting
2440	2740	PE12	
2441	2741	PE13	
2442	2742	PE14	
2443	2743	PE15	
2444	2744	PE16	
2445	2745	PE17	
2446	2746	PE18	
2447	2747	PE19	
2448	2748	PE20	
2449	2749	PE21	
2450	2750	PE22	
2451	2751	PE23	
2452	2752	PE24	
2453	2753	PE25	
2454	2754	PE26	Filter coefficient 2-1
2455	2755	PE27	Filter coefficient 2-2
2456	2756	PE28	Filter coefficient 2-3
2457	2757	PE29	Filter coefficient 2-4
2458	2758	PE30	Filter coefficient 2-5
2459	2759	PE31	Filter coefficient 2-6
2460	2760	PE32	Filter coefficient 2-7
2461	2761	PE33	Filter coefficient 2-8
2462	2762	PE34	Fully closed loop feedback pulse electronic gear 2 numerator
2463	2763	PE35	Fully closed loop feedback pulse electronic gear 2 denominator
2464	2764	PE36	For manufacturer setting
2465	2765	PE37	
2466	2766	PE38	
2467	2767	PE39	
2468	2768	PE40	

(g) MR-J3-□B-RJ080W (For direct drive motor)

Table 1.13 Servo error (2000 to 2999) list (MR-J3-□B-RJ080W)

Error code	Servo amplifier LED display	Name	Remarks
2010	10	Undervoltage	
2012	12	Memory error 1 (RAM)	
2013	13	Clock error	
2015	15	Memory error 2 (EEP-ROM)	
2016	16	Encoder error 1	
2017	17	Board error	
2019	19	Memory error 3 (Flash ROM)	
2020	20	Encoder error 2	
2021	21	Encoder error 3	
2024	24	Main circuit error	
2025	25	Absolute position erase	
2027	27	Initial magnetic pole detection error	
2030	30	Regenerative error	
2031	31	Overspeed	
2032	32	Overcurrent	
2033	33	Overvoltage	
2034	34	Receive error 1	
2035	35	Command frequency alarm	
2036	36	Receive error 2	
2042	42	Servo control error	
2045	45	Main circuit device overheat	
2046	46	Direct drive motor overheat	
2047	47	Cooling fan alarm	
2050	50	Overload 1	
2051	51	Overload 2	
2052	52	Error excessive	
2060	1A	Motor combination error	
2064 (Note-1)	1F	Encoder combination error	
2088	888	Watchdog	
2102	92	Battery cable disconnection warning	
2106	96	Home position setting error	
2116	9F	Battery warning	
2140	E0	Excessive regeneration warning	
2141	E1	Overload warning 1	
2142	E2	Direct drive motor overheat warning	
2143	E3	Absolute position counter warning	
2146	E6	Servo forced stop warning	
2147	E7	Controller emergency stop warning	
2148	E8	Cooling fan speed reduction warning	
2149	E9	Main circuit off warning	
2152	EC	Overload warning 2	
2153	ED	Output watt excess warning	

(Note-1): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2025	2064	1F	Encoder combination error

Table 1.13 Servo error (2000 to 2999) list (MR-J3-□B-RJ080W) (Continued)

Error code	Servo amplifier LED display	Name	Remarks
2301 to 2599	E4	Parameter warning (Refer to the table 1.14)	
2601 to 2899	37	Parameter error (Refer to the table 1.14)	
2913 (Note-1)	2B	Encoder counter error	
2948 (Note-1)	8A	USB communication time-out error	
2952 (Note-1)	8E	USB communication error	

(Note-1): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2031	2913	2B	Encoder counter error
2090	2948	8A	USB communication time-out error
2094	2952	8E	USB communication error

Table 1.14 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	For manufacturer setting
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Rotation direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	For manufacturer setting
2317	2617	PA17	
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Ratio of load inertia moment to direct drive motor inertia moment
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	For manufacturer setting
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch shape selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch shape selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting
2339	2639	PB20	Vibration suppression control resonance frequency setting

Error code		Parameter No.	Name
2340	2640	PB21	For manufacturer setting
2341	2641	PB22	
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain changing ratio of load inertia moment to direct drive motor inertia moment
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	Vibration suppression control filter 2
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	Function selection C-1
2369	2669	PC05	For manufacturer setting
2370	2670	PC06	Function selection C-3
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset
2377	2677	PC13	Analog monitor feedback position output standard data Low
2378	2678	PC14	Analog monitor feedback position output standard data High

Table 1.14 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2379	2679	PC15	For manufacturer setting
2380	2680	PC16	
2381	2681	PC17	
2382	2682	PC18	
2383	2683	PC19	
2384	2684	PC20	Function selection C-7
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	
2389	2689	PC25	
2390	2690	PC26	
2391	2691	PC27	
2392	2692	PC28	
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	
2396	2696	PC32	
2397	2697	PD01	
2398	2698	PD02	
2399	2699	PD03	
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-13)
2404	2704	PD08	Output signal device selection 2 (CN3-9)
2405	2705	PD09	Output signal device selection 3 (CN3-15)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	For manufacturer setting
2412	2712	PD16	
2413	2713	PD17	
2414	2714	PD18	
2415	2715	PD19	
2416	2716	PD20	
2417	2717	PD21	
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	
2421	2721	PD25	
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	
2425	2725	PD29	

Error code		Parameter No.	Name
2426	2726	PD30	For manufacturer setting
2427	2727	PD31	
2428	2728	PD32	
2429	2729	PE01	
2430	2730	PE02	
2431	2731	PE03	
2432	2732	PE04	
2433	2733	PE05	
2434	2734	PE06	
2435	2735	PE07	
2436	2736	PE08	
2437	2737	PE09	
2438	2738	PE10	
2439	2739	PE11	
2440	2740	PE12	
2441	2741	PE13	
2442	2742	PE14	
2443	2743	PE15	
2444	2744	PE16	
2445	2745	PE17	
2446	2746	PE18	
2447	2747	PE19	
2448	2748	PE20	
2449	2749	PE21	
2450	2750	PE22	
2451	2751	PE23	
2452	2752	PE24	
2453	2753	PE25	
2454	2754	PE26	Filter coefficient 2-1
2455	2755	PE27	Filter coefficient 2-2
2456	2756	PE28	Filter coefficient 2-3
2457	2757	PE29	Filter coefficient 2-4
2458	2758	PE30	Filter coefficient 2-5
2459	2759	PE31	Filter coefficient 2-6
2460	2760	PE32	Filter coefficient 2-7
2461	2761	PE33	Filter coefficient 2-8
2462	2762	PE34	For manufacturer setting
2463	2763	PE35	
2464	2764	PE36	
2465	2765	PE37	
2466	2766	PE38	
2467	2767	PE39	
2468	2768	PE40	
2501	2801	PS01	Special function selection 1
2502	2802	PS02	For manufacturer setting
2503	2803	PS03	
2504	2804	PS04	Special function selection 2

Table 1.14 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2505	2805	PS05	Servo control position deviation error detection level
2506	2806	PS06	Servo control speed deviation error detection level
2507	2807	PS07	Servo control torque deviation error detection level
2508	2808	PS08	Special function selection 3
2509	2809	PS09	Magnetic pole detection voltage level
2510	2810	PS10	For manufacturer setting
2511	2811	PS11	
2512	2812	PS12	
2513	2813	PS13	
2514	2814	PS14	
2515	2815	PS15	
2516	2816	PS16	
2517	2817	PS17	Minimal position detection method function selection
2518	2818	PS18	Minimal position detection method identification signal amplitude

Error code		Parameter No.	Name
2519	2819	PS19	For manufacturer setting
2520	2820	PS20	
2521	2821	PS21	
2522	2822	PS22	
2523	2823	PS23	
2524	2824	PS24	
2525	2825	PS25	
2526	2826	PS26	
2527	2827	PS27	
2528	2828	PS28	
2529	2829	PS29	
2530	2830	PS30	
2531	2831	PS31	
2532	2832	PS32	

(h) MR-J3-□B Safety (For safety servo)

Table 1.15 Servo error (2000 to 2999) list (MR-J3-□B Safety)

Error code	Servo amplifier LED display	Name	Remarks
2010	10	Undervoltage	
2012	12	Memory error 1 (RAM)	
2013	13	Clock error	
2015	15	Memory error 2 (EEP-ROM)	
2016	16	Encoder error 1 (At power on)	
2017	17	Board error	
2019	19	Memory error 3 (Flash ROM)	
2020	20	Encoder error 2 (during runtime)	
2021	21	Encoder error 3 (during runtime)	
2024	24	Main circuit error	
2025	25	Absolute position erase	
2028	28	Linear encoder error 2	
2030	30	Regenerative error	
2031	31	Overspeed	
2032	32	Overcurrent	
2033	33	Overvoltage	
2034	34	Receive error 1	
2035	35	Command frequency error	
2036	36	Receive error 2	
2042	42	Fully closed control error detection	
2045	45	Main circuit device overheat	
2046	46	Servo motor overheat	
2047	47	Cooling fan error	
2050	50	Overload 1	
2051	51	Overload 2	
2052	52	Error excessive	
2056	56	Forced stop error	
2070	70	Load side encoder error 1	
2071	71	Load side encoder error 2	
2060	1A	Motor combination error	
2061	2A	Linear encoder error 1	
2063	63	STO timing error	
2088	888	Watchdog	
2095	95	STO warning	
2102	92	Battery cable disconnection warning	
2106	96	Home position setting warning	
2116	9F	Battery warning	
2140	E0	Excessive regeneration warning	
2141	E1	Overload warning 1	
2143	E3	Absolute position counter warning	
2146	E6	Servo forced stop warning	
2147	E7	Controller forced stop warning	
2148	E8	Cooling fan speed reduction warning	
2149	E9	Main circuit off warning	
2152	EC	Overload warning 2	
2153	ED	Output watt excess warning	

Table 1.15 Servo error (2000 to 2999) list (MR-J3-□B Safety) (Continued)

Error code	Servo amplifier LED display	Name	Remarks
2301 to 2599	E4	Parameter warning (Refer to the table 1.16)	
2601 to 2899	37	Parameter error (Refer to the table 1.16)	
2948 (Note-1)	8A	USB communication time-out error	
2952 (Note-1)	8E	USB communication error	

(Note-1): Error codes will differ depending on the operating system software version. QD

Error code		Servo amplifier LED display	Name
Operating system software version			
"00F" or earlier	"00G" or later		
2090	2948	8A	USB communication time-out error
2094	2952	8E	USB communication error

Table 1.16 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail

Error code		Parameter No.	Name
2301	2601	PA01	Control mode
2302	2602	PA02	Regenerative option
2303	2603	PA03	Absolute position detection system
2304	2604	PA04	Function selection A-1
2305	2605	PA05	For manufacturer setting
2306	2606	PA06	
2307	2607	PA07	
2308	2608	PA08	Auto tuning mode
2309	2609	PA09	Auto tuning response
2310	2610	PA10	In-position range
2311	2611	PA11	For manufacturer setting
2312	2612	PA12	
2313	2613	PA13	
2314	2614	PA14	Rotation direction selection
2315	2615	PA15	Encoder output pulse
2316	2616	PA16	Encoder output pulse 2
2317	2617	PA17	For manufacturer setting
2318	2618	PA18	
2319	2619	PA19	Parameter write inhibit
2320	2620	PB01	Adaptive tuning mode (adaptive filter Ⅱ)
2321	2621	PB02	Vibration suppression control tuning mode (advanced vibration suppression control)
2322	2622	PB03	For manufacturer setting
2323	2623	PB04	Feed forward gain
2324	2624	PB05	For manufacturer setting
2325	2625	PB06	Ratio of load inertia moment to servo motor inertia moment
2326	2626	PB07	Model loop gain
2327	2627	PB08	Position loop gain
2328	2628	PB09	Speed loop gain
2329	2629	PB10	Speed integral compensation
2330	2630	PB11	Speed differential compensation
2331	2631	PB12	Overshoot amount compensation
2332	2632	PB13	Machine resonance suppression filter 1
2333	2633	PB14	Notch shape selection 1
2334	2634	PB15	Machine resonance suppression filter 2
2335	2635	PB16	Notch shape selection 2
2336	2636	PB17	Automatic setting parameter
2337	2637	PB18	Low-pass filter setting
2338	2638	PB19	Vibration suppression control vibration frequency setting
2339	2639	PB20	Vibration suppression control resonance frequency setting

Error code		Parameter No.	Name
2340	2640	PB21	For manufacturer setting
2341	2641	PB22	
2342	2642	PB23	Low-pass filter selection
2343	2643	PB24	Slight vibration suppression control selection
2344	2644	PB25	For manufacturer setting
2345	2645	PB26	Gain changing selection
2346	2646	PB27	Gain changing condition
2347	2647	PB28	Gain changing time constant
2348	2648	PB29	Gain changing ratio of load inertia moment to servo motor inertia moment
2349	2649	PB30	Gain changing position loop gain
2350	2650	PB31	Gain changing speed loop gain
2351	2651	PB32	Gain changing speed integral compensation
2352	2652	PB33	Gain changing vibration suppression control vibration frequency setting
2353	2653	PB34	Gain changing vibration suppression control resonance frequency setting
2354	2654	PB35	For manufacturer setting
2355	2655	PB36	
2356	2656	PB37	
2357	2657	PB38	
2358	2658	PB39	
2359	2659	PB40	
2360	2660	PB41	
2361	2661	PB42	
2362	2662	PB43	
2363	2663	PB44	
2364	2664	PB45	Vibration suppression control filter 2
2365	2665	PC01	Error excessive alarm level
2366	2666	PC02	Electromagnetic brake sequence output
2367	2667	PC03	Encoder output pulse selection
2368	2668	PC04	Function selection C-1
2369	2669	PC05	Function selection C-2
2370	2670	PC06	Function selection C-3
2371	2671	PC07	Zero speed
2372	2672	PC08	For manufacturer setting
2373	2673	PC09	Analog monitor 1 output
2374	2674	PC10	Analog monitor 2 output
2375	2675	PC11	Analog monitor 1 offset
2376	2676	PC12	Analog monitor 2 offset
2377	2677	PC13	Analog monitor feedback position output standard data Low
2378	2678	PC14	Analog monitor feedback position output standard data High

Table 1.16 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2379	2679	PC15	For manufacturer setting
2380	2680	PC16	Function selection C-3A
2381	2681	PC17	Function selection C-4
2382	2682	PC18	For manufacturer setting
2383	2683	PC19	
2384	2684	PC20	Function selection C-7
2385	2685	PC21	Alarm history clear
2386	2686	PC22	For manufacturer setting
2387	2687	PC23	
2388	2688	PC24	Forced stop deceleration time constant
2389	2689	PC25	For manufacturer setting
2390	2690	PC26	Function selection C-8
2391	2691	PC27	Function selection C-9
2392	2692	PC28	For manufacturer setting
2393	2693	PC29	
2394	2694	PC30	
2395	2695	PC31	Vertical axis freefall prevention compensation amount
2396	2696	PC32	For manufacturer setting
2397	2697	PD01	
2398	2698	PD02	
2399	2699	PD03	
2400	2700	PD04	
2401	2701	PD05	
2402	2702	PD06	
2403	2703	PD07	Output signal device selection 1 (CN3-13)
2404	2704	PD08	Output signal device selection 2 (CN3-9)
2405	2705	PD09	Output signal device selection 3 (CN3-15)
2406	2706	PD10	For manufacturer setting
2407	2707	PD11	Input filter setting
2408	2708	PD12	For manufacturer setting
2409	2709	PD13	
2410	2710	PD14	Function selection D-3
2411	2711	PD15	For manufacturer setting
2412	2712	PD16	
2413	2713	PD17	
2414	2714	PD18	
2415	2715	PD19	
2416	2716	PD20	
2417	2717	PD21	
2418	2718	PD22	
2419	2719	PD23	
2420	2720	PD24	

Error code		Parameter No.	Name
2421	2721	PD25	For manufacturer setting
2422	2722	PD26	
2423	2723	PD27	
2424	2724	PD28	
2425	2725	PD29	
2426	2726	PD30	
2427	2727	PD31	
2428	2728	PD32	
2429	2729	PE01	Fully closed loop selection 1
2430	2730	PE02	For manufacturer setting
2431	2731	PE03	Fully closed loop selection 2
2432	2732	PE04	Fully closed loop feedback pulse electronic gear 1 numerator
2433	2733	PE05	Fully closed loop feedback pulse electronic gear 1 denominator
2434	2734	PE06	Fully closed loop speed deviation error detection level
2435	2735	PE07	Fully closed loop position deviation error detection level
2436	2736	PE08	Fully closed loop dual feedback filter
2437	2737	PE09	For manufacturer setting
2438	2738	PE10	Fully closed loop selection 3
2439	2739	PE11	For manufacturer setting
2440	2740	PE12	
2441	2741	PE13	
2442	2742	PE14	
2443	2743	PE15	
2444	2744	PE16	
2445	2745	PE17	
2446	2746	PE18	
2447	2747	PE19	
2448	2748	PE20	
2449	2749	PE21	
2450	2750	PE22	
2451	2751	PE23	
2452	2752	PE24	
2453	2753	PE25	
2454	2754	PE26	Filter coefficient 2-1
2455	2755	PE27	Filter coefficient 2-2
2456	2756	PE28	Filter coefficient 2-3
2457	2757	PE29	Filter coefficient 2-4
2458	2758	PE30	Filter coefficient 2-5
2459	2759	PE31	Filter coefficient 2-6
2460	2760	PE32	Filter coefficient 2-7
2461	2761	PE33	Filter coefficient 2-8
2462	2762	PE34	Fully closed loop feedback pulse electronic gear 2 numerator

Table 1.16 Parameter warning (2301 to 2599)/Parameter error (2601 to 2899) error detail (Continued)

Error code		Parameter No.	Name
2463	2763	PE35	Fully closed loop feedback pulse electronic gear 2 denominator
2464	2764	PE36	For manufacturer setting
2465	2765	PE37	

Error code		Parameter No.	Name
2466	2766	PE38	For manufacturer setting
2467	2767	PE39	
2468	2768	PE40	

APPENDIX 1.6 Output module errors

(1) Output module errors at real mode/virtual mode switching (4000 to 5990)

Table 1.17 Output Module Error List (4000 to 5990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	4050				○	• The "lower stroke limit setting device value + stroke amount setting device value" exceeded "2147483647 (setting unit)". (At the two-way cam mode.)	Related system cannot be started.	• Since the current value within 1 cam shaft revolution cannot be calculated, return to the real mode and set the correct No. in the device.
	4060	○	○	○	○	• When the drive module is the synchronous encoder connected to the manual pulse generator inputs, and the connected clutch is the "external input mode", multiple ON/OFF command bit devices are set. Or, the external input mode clutch setting is fault.		• Set a one-to-one setting for the external input mode clutch and synchronous encoder. • Return to the real mode, turn the PLC ready flag off, then correct and write the clutch setting.
	4070	○	○	○	○	• The clutch of the external input mode is set at the Q173DPX or Q172DEX set for high-speed reading.		• Do not use the clutch of the external input mode at the Q173DPX or Q172DEX set for high-speed reading.
	5000		○	○	○	• The "feed current value" is outside the stroke limit range. • For cam, the feed current value is outside the range of "lower stroke limit value to stroke amount", when the cam/ball screw switching command device is turned ON to OFF at real/virtual mode switching or in virtual mode. (The current value within 1 cam shaft revolution cannot be calculated at the two-way cam mode.) • For cam, the feed current value is outside the range of "lower stroke limit value to stroke amount" at the servo amplifier's power supply ON. (In this case, the servo amplifier does not change into servo ON status.)		• Return to the real mode and position within the stroke limit range.
	5060				○	• The "feed current value" is within the stroke limit range, but the current value within 1 cam shaft revolution cannot be calculated. (Cam table fault)		• Correct the cam table. Set the cam table by the stroke ratio "0 to 7FFFH" of lower stroke value and stroke amount.
	5080	○	○	○	○	• Torque limit value setting outside range error.	Control with the default value "300[%]".	• Set the torque limit value within the setting range.
	5200				○	• The first lower stroke limit value storage device is an odd number.	Operation is possible, but monitoring is impossible.	• Set an even numbered the first device.
	5210	○	○	○	○	• The first clutch ON address setting device is an odd number.	Related system cannot be started.	

Table 1.17 Output Module Error List (4000 to 5990) (Continued)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	5220	○	○	○	○	• The first clutch OFF address setting device is an odd number.	Related system cannot be started.	• Set an even numbered the first device.
	5230			○	○	• The first current value within 1 virtual axis revolution storage device (main shaft side) is an odd number.	Operation is possible, but monitoring is impossible.	
	5240			○	○	• The first current value within 1 virtual axis revolution storage device (auxiliary input shaft side) is an odd number.		
	5250	○	○	○	○	• When the amount of slip is set as the clutch smoothing method, the amount of slip setting device value is outside the range (0 to 2147483647).	Amount of slip = 0 (control as the direct clutch).	• Set a value within the range of 0 to 2147483647.
	5260				○	• The device set to "Stroke amount setting device" is outside the range.	Related system cannot be started.	• Correct the device set to "Stroke amount setting device".
	5270				○	• The device set to "Cam No. setting device" is outside the range.		• Correct the device set to Cam No.
	5280	○	○	○	○	• The device set to "Clutch mode setting device" is outside the range.		• Correct the device set to clutch mode.
	5290	○	○	○	○	• The device set to "Clutch ON address setting device" is outside the range.		• Correct the device set to clutch ON address.
	5300	○	○	○	○	• The device set to "Clutch OFF address setting device" is outside the range.		• Correct the device set to clutch OFF address.
	5310	○	○	○	○	• The device set to "Clutch ON/OFF command setting device" is outside the range.		• Correct the device set to clutch ON/OFF command.
	5320	○	○	○	○	• The device set to "Speed change ratio setting device" is outside the range.		• Correct the device set to speed change ratio.
	5330	○	○	○	○	• The device set to "Amount of slip setting device" is outside the range.	Amount of slip = 0 (control as the direct clutch).	• Correct the device set to amount of slip.
	5340	○	○	○	○	• The device set to "Torque limit value setting device" is outside the range.	Related system cannot be started	• Correct the device set to torque limit value.
	5350			○	○	• The device set to "Current value within 1 virtual axis revolution storage device (main shaft side)" is outside the range.	Current value within 1 virtual axis revolution (main shaft side) cannot be monitored.	• Correct the device set to current value within 1 virtual axis revolution (main shaft side).
	5360			○	○	• The device set to "Current value within 1 virtual axis revolution storage device (auxiliary input axis side) storage device" is outside the range.	Current value within 1 virtual axis revolution (auxiliary input axis side) cannot be monitored.	• Correct the device set to current value within 1 virtual axis revolution (auxiliary input axis side).
	5370				○	• The device set to "Lower stroke limit value storage device" is outside the range.	Lower stroke limit value cannot be monitored.	• Correct the device set to lower stroke limit value.
	5380	○	○	○	○	• The device set to "Number of input axis side gear tooth count setting device" is outside the range.	Related system cannot be started.	• Correct the device set to number of input axis side gear tooth count.

Table 1.17 Output Module Error List (4000 to 5990) (Continued)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	5390	○	○	○	○	• The device set to "Number of output axis side gear tooth count setting device" is outside the range.	Related system cannot be started.	• Correct the device set to number of output axis side gear tooth count.
	5400	○	○	○	○	• Number of input axis side gear tooth count setting device is set to "0".		• Correct the number of input axis side gear tooth count.
	5410	○	○	○	○	• Number of output axis side gear tooth count setting device is set to "0".		• Correct the number of output axis side gear tooth count.
	5420	○	○	○	○	• The device set to "Slippage in-position range setting device" is outside the range.		• Correct the device set to slippage in-position range setting device.
	5430	○	○	○	○	• Slippage in-position range setting device is outside the range (0 to 2147483647).	Control with the setting value "0".	
	5440	○	○	○	○	• Either of "phase advance time" of "phase compensation processing valid flag" or "phase compensation time constant" of the phase compensation setting devices is outside the setting range.	Control as the phase compensation processing invalid.	• Correct the phase advance time. • Correct the phase compensation processing valid flag. • Correct the phase compensation time constant.
	5450	○	○	○	○	• The device set to "Smoothing clutch complete signal device" is outside the range.	Related system cannot be started.	• Correct the device set to "Smoothing clutch complete signal device".
	5460	○	○	○	○	• The device set to "Clutch status device" is outside the range.		• Correct the device set to "Clutch status device".
	5480				○	• The device set to "Cam/ball screw switching command device" is outside the range.		• Correct the device set to "Cam/ball screw switching command device".
	5490			○	○	• When the address mode clutch control system is the current value within 1 virtual axis revolution, the setting value set to "Clutch ON address setting device" is outside the range of "0 to number of pulses within 1 output axis revolution –1[pulse]".		• Correct the setting value set to "Clutch ON address setting device" with in the range of "0 to number of pulses within 1 output axis revolution – 1[pulse]".
	5500			○	○	• When the address mode clutch control system is the current value within 1 virtual axis revolution, the setting value set to "Clutch OFF address setting device" is outside the range of "0 to number of pulses within 1 output axis revolution –1[pulse]".		• Correct the setting value set to "Clutch OFF address setting device" with in the range of "0 to number of pulses within 1 output axis revolution – 1[pulse]".
	5510				○	• The device set to "Number of pulses per cam shaft revolution" is outside the range.		• Correct the device set to "Number of pulses per cam shaft revolution".
	5520				○	• The value of "Number of pulses per cam shaft revolution" is outside the range.		• Correct the setting of "Number of pulses per cam shaft revolution".

(2) Output module errors (6000 to 6990)

Table 1.18 Output Module Error List (6000 to 6990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	6000	○	○	○	○	• The servo OFF command (M3215+20n) turned ON during operation. • The servo amplifier's power supply is turned ON during operation.	Operation continues.	• Execute the servo OFF after clutch OFF command.
	6010	○	○	○		• The output speed exceeded the speed limit value during operation. (Speed clamp processing by the speed limit value is not executed.)		• Correct the speed, gear ratio and speed change ratio of drive module within the speed limit value.
	6020	○	○	○	○	• The deviation counter value exceeded the permissible droop pulse value during operation.		• Correct the speed, gear ratio and speed change ratio of drive module within the permissible droop pulse value after stopping the drive module.
	6030		○	○		• The feed current value exceeded the stroke limit range during operation.		• Control within the stroke limit value.
	6040				○	• The cam No. setting device value is outside the "used cam No." range. (Operation continues with the current cam No.)		• Correct the cam No. setting.
	6050				○	• The stroke amount setting device value is outside the range of "1 to 2147483647". • "Lower stroke limit value + stroke amount ≤ 2147483647" is outside the range. (Operation continues with the current stroke amount.)	Operation continues with the current cam No. and stroke amount.	• Correct the stroke amount setting.
	6060				○	• A control mode (feed/two-way) does not match at cam No. switching.	Operation continues.	• Correct the control mode after stopping the drive module.
	6080	○	○	○	○	• The torque limit value setting device is outside the range.	Control with the default value "300[%]".	• Set the torque limit value within the setting range.
	6090	○	○	○	○	• The servo OFF command (M3215+20n) turned on at servo OFF in operation. • The servo ON is executed by turning ON the servo amplifier's power supply in operation.	Servo ON is not executed.	• Execute the servo ON after clutch OFF command.
	6120				○	• The current value within 1 cam axis revolution was changed to the outside the range.	The current value is not changed.	• Set a value within the range of 1 to "number of pulses 1 cam shaft revolution – 1".
	6130	○	○	○	○	• Number of input axis side gear tooth count is set by indirect device setting, and the current value for the drive module was changed to the device value "0".	The gear ratio of applicable gear is not changed.	• Set the value within the range of 1 to 65535.
	6140	○	○	○	○	• Number of output axis side gear tooth count is set by indirect device setting, and the current value for the drive module was changed to the device value "0".		

Table 1.18 Output Module Error List (6000 to 6990) (Continued)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	6160				○	• Current value was changed for the axis that had not been started. Or, the current value within 1 cam shaft revolution was changed for the servo OFF axis. • The current value within 1 cam shaft revolution was changed during cam/ball screw switching processing.	Do not change the current value within 1 cam shaft revolution.	• Use the following device as interlock not to change the current value within 1 cam shaft revolution for applicable axis. (Servo READY signal (M2415+20) ON) • Do not change the current value within 1 cam shaft revolution during cam/ball screw switching or cam/ball screw switching command ON.
	6170	○	○	○	○	• Slippage in-position range setting device value is outside the range (0 to 2147483647).	Control with the setting value "0".	• Set the device value within the range of 0 to 2147483647.
	6180	○	○	○		• One of the devices set in the speed-torque control operation data is outside the range.	Operation continues without switching the control mode.	• Correct the speed-torque control operation data device.
	6190	○	○	○		• The control mode switching was executed with an invalid value specified in the control mode setting device.		• Correct the value of the control mode setting device. • When switching the mode from the continuous operation to torque control mode to another, return the mode to the previous one.
	6200	○	○	○		• The control mode switching request was executed during the zero speed was OFF.		• Switch the control mode while the output axis is stopped and the zero speed is turned on. • Make "Invalid selection during zero speed at control mode switching" valid when not waiting for the stop of the servo motor.
	6210	○	○	○		• At the control mode switching, a value set to the torque limit value at speed-torque control is outside the range.	Control with the default value "300[%]".	• Set the torque limit value to 0.1 to 1000.0[%].
	6220	○	○	○		• During torque control or continuous operation to torque control, the absolute value of the command torque is outside the range of 0 to the torque limit value at speed-torque control.	Control with the torque limit value at speed-torque control.	• Set the torque after torque change within the range of 0 to the torque limit value at speed-torque control.
	6230	○	○	○		• The control mode switching request of speed/torque control was executed for the axis that connects to the stepping driver which do not support the control mode switching.	The control mode is not switched.	• Do not switch the control mode switching request of speed/torque control for the axis that connects to the stepping driver which does not support the control mode switching.
	6240				○	• The control mode switching request of speed-torque control was executed to the cam axis.		• Do not execute the speed-torque control mode switching request to the cam axis.

Table 1.18 Output Module Error List (6000 to 6990) (Continued)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	6250	○	○	○		• During the speed-torque control, the change value by the torque limit value setting device exceeds the torque limit value at speed-torque control. • During the speed-torque control, the change value by the torque limit value individual change request (D(P).CHGT2, CHGT2) exceeds the torque limit value at speed-torque control.	• Control with the torque limit value at speed-torque control. • The torque limit value by the torque limit value individual change request (D(P).CHGT2, CHGT2) is not changed.	• Set the torque limit value after torque change within the range of 1 to the torque limit value at speed-torque control.
	6260	○	○	○	○	• The torque limit value individual change request (D(P).CHGT2, CHGT2) was executed with the setting of the torque limit value setting device of the mechanical system output module.	The torque limit value is not changed.	• When executing the torque limit value individual change request (D(P).CHGT2, CHGT2), do not set the torque limit value setting device of the mechanical system output module.
	6270	○	○	○	○	• The positive direction torque limit value or the negative direction torque limit value outside the range of 0.1 to 1000.0[%] was set in the torque limit value individual change request (CHGT2).		• Set the change request within the range of 0.1 to 1000.0[%] for the positive direction torque limit value or the negative direction torque limit value.
	6280	○	○	○	○	• The torque limit value individual change request (D(P).CHGT2, CHGT2) was made for the axis that had not been started.		• Request the torque limit value individual change for the starting axis.
	6300	○	○	○	○	• Phase compensation time constant is outside the range.	Control with the phase compensation time constant "0".	• Set the phase compensation time constant within the range of 0 to 32767 (times).
	6500	○	○	○	○	• A servo OFF state at a clutch ON command.	Clutch remains OFF.	• Return to the clutch OFF command, and repeat the clutch ON command after executing a servo ON command.
	6530		○	○	○	• The home position return request signal (M2409+20n) is turning on at a clutch ON command. (Incremental axis servo amplifier power from off to ON.)		• Return to the real mode, back to the virtual mode after home position return.
	6540				○	• Although the feed current value is within the stroke limit value, the current value within 1 cam shaft revolution cannot be calculated. (Cam table error)	Servo remains ON.	• Return to the real mode, correct the cam data settings. • Set the cam table by the stroke ratio "0 to 7FFFH" of lower stroke value and stroke amount.

(3) System errors (9000 to 9990)

Table 1.19 Output Module Error List (9000 to 9990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Minor error	9010	○	○	○	○	• The motor travel value while the power is off exceeded the "System setting mode-allowable travel value during power off" set in the system settings at the turning on of the servo amplifier.	Virtual mode continuation operation disable warning signal turns on. Further operation is possible.	• Check the position. • Check the battery of encoder.

(4) Output module errors at virtual servo motor axis start (10000 to 10990)

Table 1.20 Output Module Error List (10000 to 10990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Major error	10000		○	○	○	• The home position return request signal (M2409+20n) is ON.	Related system cannot be start.	• Return to the real mode and execute a home position return. • If position is not established after executing a home position return at all axes, the virtual mode operation cannot be executed.
	10010	○	○	○	○	• The servo error detection signal (M2408+20n) is ON.		• Execute a servo error reset in the real mode.
	10020	○	○	○	○	• A servo OFF (M2415+20n OFF) status exists at an output module where a "clutch ON" or "no clutch" setting is set at either the main shaft or auxiliary input axis.		• Turn the servo on after clutch OFF command.
	10030	○	○	○	○	• An external input signal (STOP) is turning on at an output module where a "clutch ON" or "no clutch" setting is set at either the main shaft or auxiliary input axis.		• Turn the stop signal (STOP) off.

(5) "No-clutch/clutch ON/clutch status ON" output module errors (11000 to 11990)

Table 1.21 Output Module Error List (11000 to 11990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Major error	11000	○	○	○	○	• The servo error detection signal (M2408+20n) turned on during operation.	After an immediate stop at the applicable output module, and the servo OFF state.	• Release the servo error causes. (Refer to APPENDIX 1.5).
	11010	○	○	○	○	• A servo OFF state (M2415+20n OFF) during operation. • Servo amplifier power supply was OFF.	• Operation continues at "no-clutch" axes. • At axes with clutches, control is executed based on the operation mode at the time of the error. (• Operation continues. • All clutches turns off at the applicable systems.)	• When the "operation continuation" setting is set, execute the stop processing using the user's Motion SFC program.
	11020	○	○	○	○	• The stop signal (STOP) turned on.		
	11030	○	○	○	○	• The upper limit switch signal (FLS) turned off during forward (address increase direction) travel.		
	11040	○	○	○	○	• The lower limit switch signal (RLS) turned off during reverse (address decrease direction) travel.		
	11050	○	○	○		• At the switching request to the continuous operation to torque control, the servo amplifier is not compatible with the continuous operation to torque control.		

(6) Errors when using an absolute position system (12000 to 12990)

Table 1.22 Output Module Error List (12000 to 12990)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Major error	12010	○	○	○	○	• The error causes why the home position return is required in the absolute position system are as follows: (1) The home position return has never been executed after the system start. (2) The home position return is started, but not completed correctly. (3) Absolute data in the Motion CPU is erased due to causes such as a battery error. (4) Servo error [2025], [2143], or [2913] occurred. (5) Major error [1202], [1203], [1204], [12020], [12030] or [12040] occurred. (6) "Rotation direction selection" of the servo parameter is changed.	Home position return signal turns ON.	• Execute the home position return in real mode after checking the batteries of the Motion CPU module and servo amplifier.
	12020	○	○	○	○	• A communication error between the servo amplifier and encoder occurred at the servo amplifier power supply on.	Depending on the version of operating system and servo amplifier, home position return signal turns ON.	• Check the motor and encoder cables. • If the home position return request signal is turning ON, execute a home position return in the real mode.
	12030	○	○	○	○	• The amount of change in encoder current value during operation holds the following expression: "Amount of change in encoder current value / 3.5[ms] >180° of motor revolution" It is always checked after the servo amplifier power supply on (in both servo ON and OFF states). (Q17□DCPU(-S1) use)	Home position return signal turns ON.	• Check the motor and encoder cables.
	12040	○	○	○	○	• During operation, the following expression holds: "Encoder current value [pulse] ≠ feedback current value [pulse] (number of bits in encoder enable range)". It is always checked after the servo amplifier power supply on (in both servo ON and OFF states). (Q17□DCPU(-S1) use)		

Table 1.22 Output Module Error List (12000 to 12990) (Continued)

Error class	Error code	Output module				Error cause	Processing	Corrective action
		Roller	Ball screw	Rotary table	Cam			
Major error	12050	○	○	○	○	• During operation, the following expression holds: "Encoder current value [pulse] ≠ feedback current value [pulse] (number of bits in encoder enable range)". It is always checked after the servo amplifier power supply on (in both servo ON and OFF states).	Operation continues. (Home position return signal does not turn ON.)	• Check the motor and encoder cables.

APPENDIX 1.7 Errors at real mode/virtual mode switching

Table 1.23 Real Mode/Virtual Mode Switching Error Code List

Error codes stored in SD504		Error description	Corrective action
Decimal display	Hexadecimal display		
1	0001	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which all axes have not stopped. (Operation system software version "00G" or before)	• Turn real mode/virtual mode switching request flag (M2043) OFF → ON when start accept flag (M2001 to M2032) are all OFF. (Operation system software version "00G" or before)
		• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which output axis set in the mechanical system program has not stopped. (Operation system software version "00H" or later)	• Turn real mode/virtual mode switching request flag (M2043) OFF → ON when start accept flag (M2001 to M2032) of output axis set in the mechanical system program are all OFF. (The real mode axis can be switched in even operation.) (Operation system software version "00H" or later)
256	0100	• Real mode/virtual mode switching request flag (M2043) turned ON → OFF in the state which all axes have not stopped. (Operation system software version "00G" or before)	• Turn real mode/virtual mode switching request flag (M2043) ON → OFF when start accept flag (M2001 to M2032) are all OFF. (Operation system software version "00G" or before)
		• Real mode/virtual mode switching request flag (M2043) turned ON → OFF in the state which virtual axis has not stopped. (Operation system software version "00H" or later)	• Turn real mode/virtual mode switching request flag (M2043) ON → OFF when start accept flag (M2001 to M2032) of virtual axis are all OFF. (The real mode axis can be switched in even operation.) (Operation system software version "00H" or later)
		• Real mode/virtual mode switching request flag (M2043) turned ON → OFF in the state which virtual axis has not stopped. • Real mode/virtual mode switching request flag (M2043) turned ON → OFF in the state which output module is speed-torque control".	• Turn real mode/virtual mode switching request flag (M2043) ON → OFF when start accept flag (M2001 to M2032) of output axis set in the mechanical system program are all OFF. (The real mode axis can be switched in even operation.) • Turn real/virtual mode switching request flag (M2043) ON → OFF when all output modules are in the position control.
512	0200	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which mechanical system program has not registered.	• Write the mechanical system program to the Motion CPU.
		• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the axis No. set in the system setting does not match the output axis No. set in the mechanical system program.	• Set the same axis No. at both the system settings and mechanical system program, then write the data to the Motion CPU.
513 (Note)	0201	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the PLC ready flag (M2000) or PCPU READY complete flag (SM500) is OFF.	• After turning the PLC ready flag and PCPU READY flags on, turn real mode/virtual mode switching request flag (M2043) OFF → ON.
514 (Note)	0202	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the all-axes servo ON command (M2042) is OFF.	• Turn all axes servo ON command (M2042) on, turn the all-axes servo ON accept flag on, then turn real mode/virtual mode switching request flag (M2043) OFF → ON.

(Note): Error axis No. information is not set to SD505, SD506 in this error.

Table 1.23 Real Mode/Virtual Mode Switching Error Code List (Continued)

Error codes stored in SD504		Error description	Corrective action
Decimal display	Hexadecimal display		
515 (Note)	0203	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the external forced stop input signal (EMG) is ON.	• Turn the external forced stop signal off, then turn real mode/virtual mode switching request flag (M2043) OFF → ON switching.
516 (Note)	0204	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON during the servo start processing by the servo error reset command (M3208+20n).	• When the servo error reset is executed by turning servo error reset command (M3208+20n) on, turn the servo error detection signal (M2408+20n) off, then turn real mode/virtual mode switching request flag (M2043) OFF → ON.
768	0300	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the home position return signal is turning on for the output module is other than the roller.	• Execute the home position return (execute ZERO in the servo program), and turn real mode/virtual mode switching request flag (M2043) OFF → ON after home position return request signal (M2409+20n) has turned OFF.
1024	0400	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state (M2408+20n ON) of the servo error.	• Check the servo amplifier, servo motor and wiring, etc.
1280	0500	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which the units set in the fixed parameter and output module are different for the output module is other than the roller.	• Correct the setting unit of the fixed parameter or output module, and write to the Motion CPU.
1536	0600	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON in the state which cam data has not registered although the cam is set to the output module.	• Write the cam data to the Motion CPU.
2048	0800	• Real mode/virtual mode switching request flag (M2043) turned OFF → ON without the cam No. setting to the cam No. setting device. (Cam No. setting device is "0").	• Turn real mode/virtual mode switching request flag (M2043) OFF → ON after writing the cam No. set in the cam No. used of cam parameter to the cam No. setting device.
2304	0900	• The setting value of cam stroke amount setting device is outside the range of 1 to (2^{31}-1).	• Turn real mode/virtual mode switching request flag (M2043) OFF → ON after setting the value within the range of 1 to (2^{31}-1) to the cam stroke amount setting device.
2816	0B00	• The cam stroke amount setting device is not an even number.	• Set an even number to the cam stroke amount setting device.
3072	0C00	• Setting for real mode axis is not correct.	• Execute "conversion and save" after setting real mode axis setting in the mechanical system program editor.
3328	0D00	• The number of pulses per revolution of the rotary table is outside the range of 1 to 1073741824.	• Correct the number of pulses per revolution and the travel value per revolution in the fixed parameter within the range of 1 to 1073741824 to the number of pulses per revolution of the rotary table.
-4094 (Note)	F002	• The PLC ready flag (M2000) turned off, and the system returned to the real mode during virtual mode operation. • The Motion CPU stopped during virtual mode operation.	• Turn PLC ready flag (M2000) on. • Set the Motion CPU "RUN" state.
-4095 (Note)	F001	• The servo error detection signal (M2408+20n) turned off, and the system returned to the real mode during virtual mode operation.	• Check the servo error code register to determine the error cause at the axis in question, then release the error cause (Refer to APPENDIX 1.5).
-4096 (Note)	F000	• The forced stop signal (EMG) turned on, and the system returned to the real mode.	• Turn the forced stop signal off.

(Note): Error axis No. information is not set to SD505, SD506 in this error.

APPENDIX 2 Setting Range for Indirect Setting Devices

Positioning address, command speed or M-code, etc. (excluding the axis No.) set in the servo program can be set indirectly by the word.

(1) Device range

The number of device words and device range at indirect setting are shown below.

<table>
<tr><th></th><th colspan="2">Item</th><th>Number of device words</th><th>Device setting range</th><th>Remarks</th></tr>
<tr><td rowspan="6">Common</td><td colspan="2">Parameter block No.</td><td>1</td><td rowspan="19"><table><tr><th>Device</th><th>Range</th></tr><tr><td>D</td><td>0 to 8191 (Note-1)</td></tr><tr><td>W</td><td>0000 to 1FFF</td></tr><tr><td>#</td><td>0 to 7999</td></tr><tr><td>U□\G</td><td>10000 to (10000+p-1) (Note-2)</td></tr></table></td><td rowspan="19"></td></tr>
<tr><td colspan="2">Address (travel value)</td><td>2</td></tr>
<tr><td colspan="2">Command speed</td><td>2</td></tr>
<tr><td colspan="2">Dwell time</td><td>1</td></tr>
<tr><td colspan="2">M-code</td><td>1</td></tr>
<tr><td colspan="2">Torque limit value</td><td>1</td></tr>
<tr><td rowspan="4">Arc</td><td colspan="2">Auxiliary point</td><td>2</td></tr>
<tr><td colspan="2">Radius</td><td>2</td></tr>
<tr><td colspan="2">Central point</td><td>2</td></tr>
<tr><td colspan="2">Pitch</td><td>1</td></tr>
<tr><td rowspan="13">Parameter block</td><td colspan="2">Control unit</td><td>1</td></tr>
<tr><td colspan="2">Speed limit value</td><td>2</td></tr>
<tr><td colspan="2">Acceleration time</td><td>1</td></tr>
<tr><td colspan="2">Deceleration time</td><td>1</td></tr>
<tr><td colspan="2">Rapid stop deceleration time</td><td>1</td></tr>
<tr><td colspan="2">S-curve ratio</td><td>1</td></tr>
<tr><td rowspan="6">Advanced S-curve acceleration/ deceleration</td><td>Acceleration/deceleration system</td><td>1</td></tr>
<tr><td>Acceleration section 1 ratio</td><td>1</td></tr>
<tr><td>Acceleration section 2 ratio</td><td>1</td></tr>
<tr><td>Deceleration section 1 ratio</td><td>1</td></tr>
<tr><td>Deceleration section 2 ratio</td><td>1</td></tr>
<tr><td colspan="2">Torque limit value</td><td>1</td></tr>
<tr><td colspan="2">Deceleration processing on STOP input</td><td>1</td></tr>
<tr><td colspan="2">Allowable error range for circular interpolation</td><td>2</td></tr>
<tr><td rowspan="10">Others</td><td colspan="2">Command speed (Constant speed)</td><td>2</td></tr>
<tr><td colspan="2">FIN acceleration/deceleration</td><td>1</td></tr>
<tr><td colspan="2">Fixed position stop acceleration/deceleration time</td><td>1</td></tr>
<tr><td colspan="2">Repetition condition (Number of repetitions)</td><td>1</td></tr>
<tr><td colspan="2">Repetition condition (ON/OFF)</td><td rowspan="6">Bit</td><td rowspan="6"><table><tr><th>Device</th><th>Range</th></tr><tr><td>X</td><td>0000 to 1FFF (Note-3)</td></tr><tr><td>Y</td><td>0000 to 1FFF</td></tr><tr><td>M</td><td>0 to 8191(Note-1)</td></tr><tr><td>B</td><td>0000 to 1FFF</td></tr><tr><td>F</td><td>0 to 2047</td></tr><tr><td>U□\G</td><td>10000.0 to (10000+p-1).F (Note-2)</td></tr></table></td></tr>
<tr><td colspan="2">Cancel</td></tr>
<tr><td colspan="2">Skip</td></tr>
<tr><td colspan="2">WAIT ON/OFF</td></tr>
<tr><td colspan="2">Fixed position stop</td></tr>
<tr><td colspan="2"></td></tr>
</table>

(Note-1): Synchronous encoder axis area cannot be set.

(Note-2): "p" indicates the user setting area points of the Multiple CPU high speed transmission area for each CPU.

(Note-3): The range of "PXn+4 to PXn+F" cannot be used (fixed at 0) for the input device (PXn+0 to PXn+F) allocated to the built-in interface in Motion CPU (DI). (n: First input No.) QDS

POINT

(1) Be sure to set even-numbered devices of the items set as 2-word.
Be sure to set as 32-bit integer type when the data is set in these devices using the Motion SFC programs. (Example : #0L, D0L)
(2) Refer to Chapter 2 of the "Q173D(S)CPU/Q172D(S)CPU Motion controller Programming Manual (COMMON)" for the user setting area points of the Multiple CPU high speed transmission area.

(2) Inputting device data

Indirect setting device data is inputted by the Motion CPU at the servo program start.
Do not change the applicable device before setting to device and start completion.
The procedures by start method for setting data to devices and cautions are shown below.

Start method	Setting method	Notes
Start by the servo program	Set data in indirect setting devices. ↓ Start the servo program.	Do not change the indirect setting device before the "positioning start complete signal" of the starting axis turns on.
Set the loop (FOR - NEXT) point data for CPSTART instruction indirectly	Set initial command data in the indirect setting device. ↓ Start using the servo program (or turn the cancel command device on). ↓ Read the value of "data set pointer for constant-speed control" of the start axis, and update the data input by Motion CPU.	Refer to the positioning signal data register "Monitoring data area" for details.

APPENDIX 3 Processing Times of the Motion CPU

The processing time of each signal and each instruction for positioning control in the Multiple CPU system is shown below.

(1) Motion operation cycle [ms] (Default)

(a) Q173DSCPU/Q172DSCPU

	Q173DSCPU			Q172DSCPU	
Number of setting axes (SV22)	1 to 6	7 to 16	17 to 32	1 to 6	7 to 16
Operation cycle [ms]	0.44	0.88	1.77	0.44	0.88

(b) Q173DCPU(-S1)/Q172DCPU(-S1)

	Q173DCPU(-S1)				Q172DCPU(-S1)	
Number of setting axes (SV22)	1 to 4	5 to 12	13 to 28	29 to 32	1 to 4	5 to 8
Operation cycle [ms]	0.44	0.88	1.77	3.55	0.44	0.88

(2) CPU processing time [ms]

The instruction processing time means the time until the content is reflected to servo amplifier side after each instruction is executed.
(Including the transmission time between Motion controller and servo amplifier.)

(a) Q173DSCPU/Q172DSCPU

		Q173DSCPU/Q172DSCPU					
Operation cycle [ms]		0.22	0.44	0.88	1.77	3.55	7.11
Servo program start processing time (Note-1)	"WAIT ON/OFF" + Motion control step	0.44	0.88	1.77	2.66	4.44	7.99
	Only Motion control step	0.6 to 0.9	1.0 to 1.4	1.9 to 2.8	2.8 to 4.6	4.6 to 8.2	8.1 to 15.2
	Dedicated instruction (D(P).SVST) from the PLC CPU	1.4 to 2.3	2.2 to 3.1	3.5 to 4.4	5.3 to 6.2	8.8 to 9.7	16.0 to 16.9
Speed change response time	Instruction (CHGV) from the Motion SFC	0.4 to 0.9	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	8.0 to 15.1
	Dedicated instruction (D(P).CHGV) from the PLC CPU	1.4 to 2.3	1.7 to 2.6	2.6 to 3.5	3.5 to 4.4	5.3 to 6.2	8.9 to 9.8
Torque limit value change response time	Instruction (CHGT) from the Motion SFC	0.4 to 0.9	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	4.4 to 11.5
	Dedicated instruction (D(P).CHGT) from the PLC CPU	1.4 to 2.3	1.7 to 2.6	2.6 to 3.5	3.5 to 4.4	5.3 to 6.2	5.3 to 9.7
Torque limit value individual change response time	Instruction (CHGT2) from the Motion SFC	0.4 to 0.9	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	4.4 to 11.5
	Dedicated instruction (D(P).CHGT2) from the PLC CPU	1.4 to 2.3	1.7 to 2.6	2.6 to 3.5	3.5 to 4.4	5.3 to 6.2	5.3 to 9.7
Target position change response time	Instruction (CHGP) from the Motion SFC	0.4 to 0.9	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	8.0 to 15.1
Time from PLC ready flag (M2000) ON to PCPU READY complete flag (SM500) ON		44 to 60					

(Note-1): FEED instruction varies greatly depending on the condition (whether other axes are operating).

(b) Q173DCPU(-S1)/Q172DCPU(-S1)

		Q173DCPU(-S1)/Q172DCPU(-S1)					
Operation cycle [ms]		0.44	0.88	1.77	3.55	7.11	14.2
Servo program start processing time (Note-1)	"WAIT ON/OFF" + Motion control step	0.88	1.77	2.66	4.44	7.99	15.11
	Only Motion control step	1.0 to 1.4	1.9 to 2.8	2.8 to 4.6	4.6 to 8.2	8.1 to 15.2	15.2 to 29.4
	Dedicated instruction (D(P).SVST) from the PLC CPU	2.2 to 3.1	3.5 to 4.4	5.3 to 6.2	8.8 to 9.7	16.0 to 16.9	30.2 to 31.1
Speed change response time	Instruction (CHGV) from the Motion SFC	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	8.0 to 15.1	15.1 to 29.3
	Dedicated instruction (D(P).CHGV) from the PLC CPU	1.7 to 2.6	2.6 to 3.5	3.5 to 4.4	5.3 to 6.2	8.9 to 9.8	16.0 to 16.9
Torque limit value change response time	Instruction (CHGT) from the Motion SFC	0.8 to 1.3	1.7 to 2.6	2.6 to 4.4	4.4 to 8.0	4.4 to 11.5	4.4 to 18.6
	Dedicated instruction (D(P).CHGT) from the PLC CPU	1.7 to 2.6	2.6 to 3.5	3.5 to 4.4	5.3 to 6.2	5.3 to 9.7	5.3 to 16.0
Time from PLC ready flag (M2000) ON to PCPU READY complete flag (SM500) ON		22 to 28					

(Note-1): FEED instruction varies greatly depending on the condition (whether other axes are operating).

(3) Virtual servo motor axis/synchronous encoder axis operation cycle [ms] (Default)

(a) Q173DSCPU/Q172DSCPU

	Q173DSCPU			Q172DSCPU	
Number of setting axes (SV22)	1 to 6	7 to 16	17 to 32	1 to 6	7 to 16
Virtual servo motor [ms]	0.44	0.88	1.77	0.44	0.88
Synchronous encoder [ms]	0.44	0.88	1.77	0.44	0.88

(b) Q173DCPU(-S1)/Q172DCPU(-S1)

	Q173DCPU(-S1)				Q172DCPU(-S1)	
Number of setting axes (SV22)	1 to 4	5 to 12	13 to 28	29 to 32	1 to 4	5 to 8
Virtual servo motor [ms]	0.44	0.88	1.77	3.55	0.44	0.88
Synchronous encoder [ms]	0.44	0.88	1.77	3.55	0.44	0.88

APPENDIX 4 Device List

(1) Axis status list

Axis No.	Device No.
1	M2400 to M2419
2	M2420 to M2439
3	M2440 to M2459
4	M2460 to M2479
5	M2480 to M2499
6	M2500 to M2519
7	M2520 to M2539
8	M2540 to M2559
9	M2560 to M2579
10	M2580 to M2599
11	M2600 to M2619
12	M2620 to M2639
13	M2640 to M2659
14	M2660 to M2679
15	M2680 to M2699
16	M2700 to M2719
17	M2720 to M2739
18	M2740 to M2759
19	M2760 to M2779
20	M2780 to M2799
21	M2800 to M2819
22	M2820 to M2839
23	M2840 to M2859
24	M2860 to M2879
25	M2880 to M2899
26	M2900 to M2919
27	M2920 to M2939
28	M2940 to M2959
29	M2960 to M2979
30	M2980 to M2999
31	M3000 to M3019
32	M3020 to M3039

Signal name

	Signal name	Real	Virtual				Real Mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Positioning start complete	○	OFF				○	Operation cycle		Status signal
1	Positioning complete									
2	In-position		○							
3	Command in-position		OFF							
4	Speed controlling									
5	Speed / position switching latch									
6	Zero pass		○							
7	Error detection							Immediately		
8	Servo error detection							Operation cycle		
9	Home position return request							Main cycle		
10	Home position return complete							Operation cycle		
11	External signals FLS							Main cycle		
12	External signals RLS									
13	External signals STOP									
14	External signals DOG/CHANGE									
15	Servo ready							Operation cycle		
16	Torque limiting									
17	Unusable	—	—				—	—	—	—
18	Virtual mode continuation operation disable warning (Note-1)	○	○				○	At virtual mode transition		Status signal
19	M-code outputting		OFF					Operation cycle		

○ : Valid

(Note-1): It is unusable in the SV22 real mode.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(2) Axis command signal list

Axis No.	Device No.
1	M3200 to M3219
2	M3220 to M3239
3	M3240 to M3259
4	M3260 to M3279
5	M3280 to M3299
6	M3300 to M3319
7	M3320 to M3339
8	M3340 to M3359
9	M3360 to M3379
10	M3380 to M3399
11	M3400 to M3419
12	M3420 to M3439
13	M3440 to M3459
14	M3460 to M3479
15	M3480 to M3499
16	M3500 to M3519
17	M3520 to M3539
18	M3540 to M3559
19	M3560 to M3579
20	M3580 to M3599
21	M3600 to M3619
22	M3620 to M3639
23	M3640 to M3659
24	M3660 to M3679
25	M3680 to M3699
26	M3700 to M3719
27	M3720 to M3739
28	M3740 to M3759
29	M3760 to M3779
30	M3780 to M3799
31	M3800 to M3819
32	M3820 to M3839

Signal name

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Stop command	○	×				○		Operation cycle	Command signal
1	Rapid stop command									
2	Forward rotation JOG start command								Main cycle	
3	Reverse rotation JOG start command									
4	Complete signal OFF command									
5	Speed/position switching enable command								Operation cycle	
6	Gain changing 2 command (Note-1) QDS Ver.!		○						Operation cycle (Note-2)	
7	Error reset command								Main cycle	
8	Servo error reset command									
9	External stop input disable at start command		×						At start	
10	Unusable	—	—				—	—	—	—
11										
12	Feed current value update command	○	×				○		At start	Command signal
13	Address clutch reference setting command (Note-3)	×	×		○		×		At virtual mode transition	
14	Cam reference position setting command (Note-3)		×			○				
15	Servo OFF command	○	○				○		Operation cycle	
16	Gain changing command								Operation cycle (Note-2)	
17	PI-PID switching command QDS									
18	Control loop changing command								Operation cycle	
19	FIN signal		×							

○ : Valid, × : Invalid

(Note-1): Servo amplifier (MR-J5(W)-□B) only.
(Note-2): It is unusable in the SV22 real mode.
(Note-3): Operation cycle 7.1[ms] or more: Every 3.5[ms]

Ver.! : Refer to Section 1.4 for the software version that supports this function.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(3) Virtual servo motor axis status list

Axis No.	Device No.	Signal name
1	M4000 to M4019	
2	M4020 to M4039	
3	M4040 to M4059	
4	M4060 to M4079	
5	M4080 to M4099	
6	M4100 to M4119	
7	M4120 to M4139	
8	M4140 to M4159	
9	M4160 to M4179	
10	M4180 to M4199	
11	M4200 to M4219	
12	M4220 to M4239	
13	M4240 to M4259	
14	M4260 to M4279	
15	M4280 to M4299	
16	M4300 to M4319	
17	M4320 to M4339	
18	M4340 to M4359	
19	M4360 to M4379	
20	M4380 to M4399	
21	M4400 to M4419	
22	M4420 to M4439	
23	M4440 to M4459	
24	M4460 to M4479	
25	M4480 to M4499	
26	M4500 to M4519	
27	M4520 to M4539	
28	M4540 to M4559	
29	M4560 to M4579	
30	M4580 to M4599	
31	M4600 to M4619	
32	M4620 to M4639	

	Signal name	Real	Virtual					Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam	Real mode axis			
0	Positioning start complete	Backup	○				×	Operation cycle		Status signal
1	Positioning complete									
2	Unusable	—	—				—	—	—	—
3	Command in-position	Backup	○				×	Operation cycle		Status signal
4	Speed controlling									
5	Unusable	—	—				—	—	—	—
6										
7	Error detection	Backup	○				×	Immedi-ately		Status signal
8	Unusable	—	—				—	—	—	—
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19	M-code outputting	Backup	○				×	Operation cycle		Status signal

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(4) Virtual servo motor axis command signal list

Axis No.	Device No.	Signal name
1	M4800 to M4819	
2	M4820 to M4839	
3	M4840 to M4859	
4	M4860 to M4879	
5	M4880 to M4899	
6	M4900 to M4919	
7	M4920 to M4939	
8	M4940 to M4959	
9	M4960 to M4979	
10	M4980 to M4999	
11	M5000 to M5019	
12	M5020 to M5039	
13	M5040 to M5059	
14	M5060 to M5079	
15	M5080 to M5099	
16	M5100 to M5119	
17	M5120 to M5139	
18	M5140 to M5159	
19	M5160 to M5179	
20	M5180 to M5199	
21	M5200 to M5219	
22	M5220 to M5239	
23	M5240 to M5259	
24	M5260 to M5279	
25	M5280 to M5299	
26	M5300 to M5319	
27	M5320 to M5339	
28	M5340 to M5359	
29	M5360 to M5379	
30	M5380 to M5399	
31	M5400 to M5419	
32	M5420 to M5439	

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Stop command	×	○				×		Operation cycle	Command signal
1	Rapid stop command									
2	Forward rotation JOG start command								Main cycle	
3	Reverse rotation JOG start command									
4	Complete signal OFF command									
5	Unusable	—	—				—	—	—	—
6										
7	Error reset command	×	○				×		Main cycle	Command signal
8	Unusable	—	—				—	—	—	—
9	External stop input disable at start command	×	○				×		At start	Command signal
10	Unusable	—	—				—	—	—	—
11										
12										
13										
14										
15										
16										
17										
18										
19	FIN signal	×	○				×		Operation cycle	Command signal

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(5) Synchronous encoder axis status list

Axis No.	Device No.	Signal name
1	M4640 to M4643	
2	M4644 to M4647	
3	M4648 to M4651	
4	M4652 to M4655	
5	M4656 to M4659	
6	M4660 to M4663	
7	M4664 to M4667	
8	M4668 to M4671	
9	M4672 to M4675	
10	M4676 to M4679	
11	M4680 to M4683	
12	M4684 to M4687	

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Error detection	○	○	Immediately		Status signal
1	External signal TREN			Main cycle		
2	Virtual mode continuation operation disable warning					
3	Unusable	—	—	—	—	—

○ : Valid

POINT

(1) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(2) The device area of 9 axes or more can be used as a user device in the Q172DCPU(-S1).
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(6) Synchronous encoder axis command signal list

Axis No.	Device No.	Signal name
1	M5440 to M5443	
2	M5444 to M5447	
3	M5448 to M5451	
4	M5452 to M5455	
5	M5456 to M5459	
6	M5460 to M5463	
7	M5464 to M5467	
8	M5468 to M5471	
9	M5472 to M5475	
10	M5476 to M5479	
11	M5480 to M5483	
12	M5484 to M5487	

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Error reset	× (Note-1)	○		Main cycle	Status signal
1	Unusable	—	—	—	—	—
2						
3						

○ : Valid, × : Invalid

(Note-1): It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

POINT

(1) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(2) The device area of 9 axes or more can be used as a user device in the Q172DCPU(-S1).
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(7) Common device list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2000	PLC ready flag		Main cycle	Command signal	M3072
M2001	Axis 1	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2002	Axis 2				
M2003	Axis 3				
M2004	Axis 4				
M2005	Axis 5				
M2006	Axis 6				
M2007	Axis 7				
M2008	Axis 8				
M2009	Axis 9				
M2010	Axis 10				
M2011	Axis 11				
M2012	Axis 12				
M2013	Axis 13				
M2014	Axis 14				
M2015	Axis 15				
M2016	Axis 16				
M2017	Axis 17				
M2018	Axis 18				
M2019	Axis 19				
M2020	Axis 20				
M2021	Axis 21				
M2022	Axis 22				
M2023	Axis 23				
M2024	Axis 24				
M2025	Axis 25				
M2026	Axis 26				
M2027	Axis 27				
M2028	Axis 28				
M2029	Axis 29				
M2030	Axis 30				
M2031	Axis 31				
M2032	Axis 32				
M2033	Unusable (2 points)	—	—	—	—
M2034					
M2035	Motion error history clear request flag		Main cycle	Command signal	M3080
M2036	Unusable (2 points)	—	—	—	—
M2037					
M2038	Motion SFC debugging flag	At debugging mode transition		Status signal	
M2039	Motion error detection flag	Immediate			
M2040	Speed switching point specified flag		At start	Command signal	M3073
M2041	System setting error flag	Operation cycle		Status signal	
M2042	All axes servo ON command		Operation cycle	Command signal	M3074
M2043	Real mode/virtual mode switching request (SV22)		At virtual mode transition		M3075
M2044	Real mode/virtual mode switching status (SV22)	At virtual mode transition		Status signal	
M2045	Real mode/virtual mode switching error detection signal (SV22)				
M2046	Out-of-sync warning (SV22)				
M2047	Motion slot fault detection flag	Operation cycle			
M2048	JOG operation simultaneous start command		Main cycle	Command signal	M3076
M2049	All axes servo ON accept flag	Operation cycle		Status signal	
M2050	Unusable	—	—	—	—
M2051	Manual pulse generator 1 enable flag		Main cycle	Command signal	M3077
M2052	Manual pulse generator 2 enable flag				M3078
M2053	Manual pulse generator 3 enable flag				M3079
M2054	Operation cycle over flag	Operation cycle		Status signal	

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2055	Unusable (6 points)	—	—	—	—
M2056					
M2057					
M2058					
M2059					
M2060					
M2061	Axis 1	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2062	Axis 2				
M2063	Axis 3				
M2064	Axis 4				
M2065	Axis 5				
M2066	Axis 6				
M2067	Axis 7				
M2068	Axis 8				
M2069	Axis 9				
M2070	Axis 10				
M2071	Axis 11				
M2072	Axis 12				
M2073	Axis 13				
M2074	Axis 14				
M2075	Axis 15				
M2076	Axis 16				
M2077	Axis 17				
M2078	Axis 18				
M2079	Axis 19				
M2080	Axis 20				
M2081	Axis 21				
M2082	Axis 22				
M2083	Axis 23				
M2084	Axis 24				
M2085	Axis 25				
M2086	Axis 26				
M2087	Axis 27				
M2088	Axis 28				
M2089	Axis 29				
M2090	Axis 30				
M2091	Axis 31				
M2092	Axis 32				
M2093	Unusable (8 points)	—	—	—	—
M2094					
M2095					
M2096					
M2097					
M2098					
M2099					
M2100					
M2101	Axis 1	Operation cycle		Status signal (Note-2), (Note-4)	
M2102	Axis 2				
M2103	Axis 3				
M2104	Axis 4				
M2105	Axis 5				
M2106	Axis 6				
M2107	Axis 7				
M2108	Axis 8				
M2109	Axis 9				

Speed change accepting flag

Synchronous encoder current value changing flag (Note-5)

Common device list (Continued)

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2110	Axis 10	Synchronous encoder current value changing flag (Note-5)	Operation cycle		Status signal (Note-2), (Note-4)	
M2111	Axis 11					
M2112	Axis 12					
M2113	Unusable (15 points)		—	—	—	—
M2114						
M2115						
M2116						
M2117						
M2118						
M2119						
M2120						
M2121						
M2122						
M2123						
M2124						
M2125						
M2126						
M2127						
M2128	Axis 1	Automatic decelerating flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2129	Axis 2					
M2130	Axis 3					
M2131	Axis 4					
M2132	Axis 5					
M2133	Axis 6					
M2134	Axis 7					
M2135	Axis 8					
M2136	Axis 9					
M2137	Axis 10					
M2138	Axis 11					
M2139	Axis 12					
M2140	Axis 13					
M2141	Axis 14					
M2142	Axis 15					
M2143	Axis 16					
M2144	Axis 17					
M2145	Axis 18					
M2146	Axis 19					
M2147	Axis 20					
M2148	Axis 21					
M2149	Axis 22					
M2150	Axis 23					
M2151	Axis 24					
M2152	Axis 25					
M2153	Axis 26					
M2154	Axis 27					
M2155	Axis 28					
M2156	Axis 29					
M2157	Axis 30					
M2158	Axis 31					
M2159	Axis 32					
M2160	Unusable (19 points) (Note-7)		—	—	—	—
M2161						
M2162						
M2163						
M2164						
M2165						
M2166						
M2167						
M2168						
M2169						
M2170						
M2171						
M2172						
M2173						
M2174						
M2175						
M2176						
M2177						
M2178						

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2179	Unusable (45 points) (Note-7)		—	—	—	—
M2180						
M2181						
M2182						
M2183						
M2184						
M2185						
M2186						
M2187						
M2188						
M2189						
M2190						
M2191						
M2192						
M2193						
M2194						
M2195						
M2196						
M2197						
M2198						
M2199						
M2200						
M2201						
M2202						
M2203						
M2204						
M2205						
M2206						
M2207						
M2208						
M2209						
M2210						
M2211						
M2212						
M2213						
M2214						
M2215						
M2216						
M2217						
M2218						
M2219						
M2220						
M2221						
M2222						
M2223						
M2224	Unusable (16 points)		—	—	—	—
M2225						
M2226						
M2227						
M2228						
M2229						
M2230						
M2231						
M2232						
M2233						
M2234						
M2235						
M2236						
M2237						
M2238						
M2239						
M2240	Axis 1	Speed change "0" accepting flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2241	Axis 2					
M2242	Axis 3					
M2243	Axis 4					
M2244	Axis 5					
M2245	Axis 6					
M2246	Axis 7					
M2247	Axis 8					

Common device list (Continued)

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2248	Axis 9	Speed change "0" accepting flag	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2249	Axis 10					
M2250	Axis 11					
M2251	Axis 12					
M2252	Axis 13					
M2253	Axis 14					
M2254	Axis 15					
M2255	Axis 16					
M2256	Axis 17					
M2257	Axis 18					
M2258	Axis 19					
M2259	Axis 20					
M2260	Axis 21					
M2261	Axis 22					
M2262	Axis 23					
M2263	Axis 24					
M2264	Axis 25					
M2265	Axis 26					
M2266	Axis 27					
M2267	Axis 28					
M2268	Axis 29					
M2269	Axis 30					
M2270	Axis 31					
M2271	Axis 32					
M2272	Axis 1	Control loop monitor status				
M2273	Axis 2					
M2274	Axis 3					
M2275	Axis 4					
M2276	Axis 5					
M2277	Axis 6					
M2278	Axis 7					
M2279	Axis 8					
M2280	Axis 9					
M2281	Axis 10					
M2282	Axis 11					
M2283	Axis 12					

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction	Remark (Note-6)
M2284	Axis 13	Control loop monitor status	Operation cycle		Status signal (Note-1), (Note-2), (Note-3), (Note-4)	
M2285	Axis 14					
M2286	Axis 15					
M2287	Axis 16					
M2288	Axis 17					
M2289	Axis 18					
M2290	Axis 19					
M2291	Axis 20					
M2292	Axis 21					
M2293	Axis 22					
M2294	Axis 23					
M2295	Axis 24					
M2296	Axis 25					
M2297	Axis 26					
M2298	Axis 27					
M2299	Axis 28					
M2300	Axis 29					
M2301	Axis 30					
M2302	Axis 31					
M2303	Axis 32					
M2304	Unusable (16 points)		—	—	—	—
M2305						
M2306						
M2307						
M2308						
M2309						
M2310						
M2311						
M2312						
M2313						
M2314						
M2315						
M2316						
M2317						
M2318						
M2319						

(Note-1): The range of axis No.1 to 16 is valid in the Q172DSCPU.
(Note-2): The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(Note-3): Device area of 17 axes or more is unusable in the Q172DSCPU.
(Note-4): Device area of 9 axes or more is unusable in the Q172DCPU(-S1).
(Note-5): It is unusable in the real mode.
(It can be used in the real mode for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".)
(Note-6): It can also be ordered the device of a remark column.
(Note-7): These devices can be used as the clutch statuses.
The clutch status can also be set as the optional device at the clutch parameter.
Refer to Section 7.2.2.

(8) Common device list (Command signal)

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction	Remark (Note-1), (Note-2)
M3072	PLC ready flag		Main cycle		M2000
M3073	Speed switching point specified flag		At start		M2040
M3074	All axes servo ON command		Operation cycle		M2042
M3075	Real mode/virtual mode switching request (SV22)		At virtual mode transition		M2043
M3076	JOG operation simultaneous start command		Main cycle	Command signal	M2048
M3077	Manual pulse generator 1 enable flag				M2051
M3078	Manual pulse generator 2 enable flag				M2052
M3079	Manual pulse generator 3 enable flag				M2053
M3080	Motion error history clear request flag				M2035
M3081 to M3135	Unusable (Note-3) (55 points)	—	—	—	—

(Note-1): The state of a device is not in agreement when the device of a remark column is turned ON/OFF directly. In addition, when the request from a data register and the request from the above device are performed simultaneously, the request from the above device becomes effective.

(Note-2): It can also be ordered the device of a remark column.

(Note-3): Do not use it as a user device. It can be used as a device that performs automatic refresh because of area for the reserve of command signal.

POINT

The device of a remark column turns ON by OFF to ON of the above device, and turns OFF by ON to OFF of the above device.
The command signal cannot be turned ON/OFF by the PLC CPU in the automatic refresh because the statuses and commands are mixed together in M2000 to M2053. Use the above devices in the case.
And, it can also be turned ON/OFF by the data register. (Refer to Section 4.2.8)

(9) Axis monitor device list

Axis No.	Device No.	Signal name
1	D0 to D19	
2	D20 to D39	
3	D40 to D59	
4	D60 to D79	
5	D80 to D99	
6	D100 to D119	
7	D120 to D139	
8	D140 to D159	
9	D160 to D179	
10	D180 to D199	
11	D200 to D219	
12	D220 to D239	
13	D240 to D259	
14	D260 to D279	
15	D280 to D299	
16	D300 to D319	
17	D320 to D339	
18	D340 to D359	
19	D360 to D379	
20	D380 to D399	
21	D400 to D419	
22	D420 to D439	
23	D440 to D459	
24	D460 to D479	
25	D480 to D499	
26	D500 to D519	
27	D520 to D539	
28	D540 to D559	
29	D560 to D579	
30	D580 to D599	
31	D600 to D619	
32	D620 to D639	

	Signal name	Real	Virtual					Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam	Real mode axis			
0	Feed current value/roller cycle speed	○	○				○	Operation cycle		Monitor device
1										
2	Real current value									
3										
4	Deviation counter value									
5										
6	Minor error code							Immediately		
7	Major error code									
8	Servo error code							Main cycle		
9	Home position return re-travel value		Backup				Backup	Operation cycle		
10	Travel value after proximity dog ON						○			
11										
12	Execute program No.		×					At start		
13	M-code							Operation cycle		
14	Torque limit value		○							
15	Data set pointer for constant-speed control		×					At start/ during start		
16	Unusable (Note-1)	—	—				—	—	—	—
17										
18	Real current value at stop input	○	Backup				○	Operation cycle		Monitor device
19										

○ : Valid, × : Invalid

(Note-1): It can be used as the travel value change register. The travel value change register can be set to the device optionally in the servo program.
Refer to the "Q173D(S)CPU/Q172D(S)CPU Motion controller (SV13/SV22) Programming Manual (REAL MODE)" for details.

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(10) Control change register list

Axis No.	Device No.	Signal name
1	D640, D641	
2	D642, D643	
3	D644, D645	
4	D646, D647	
5	D648, D649	
6	D650, D651	
7	D652, D653	
8	D654, D655	
9	D656, D657	
10	D658, D659	
11	D660, D661	
12	D662, D663	
13	D664, D665	
14	D666, D667	
15	D668, D669	
16	D670, D671	
17	D672, D673	
18	D674, D675	
19	D676, D677	
20	D678, D679	
21	D680, D681	
22	D682, D683	
23	D684, D685	
24	D686, D687	
25	D688, D689	
26	D690, D691	
27	D692, D693	
28	D694, D695	
29	D696, D697	
30	D698, D699	
31	D700, D701	
32	D702, D703	

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0 1	JOG speed setting	○	○		At start	Command device

○ : Valid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The following device area can be used as a user device.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

However, when the project of Q172DSCPU/Q172DCPU(-S1) is replaced with Q173DSCPU/Q173DCPU(-S1), this area cannot be used as a user device.

(11) Virtual servo motor axis monitor device list

Axis No.	Device No.
1	D800 to D809
2	D810 to D819
3	D820 to D829
4	D830 to D839
5	D840 to D849
6	D850 to D859
7	D860 to D869
8	D870 to D879
9	D880 to D889
10	D890 to D899
11	D900 to D909
12	D910 to D919
13	D920 to D929
14	D930 to D939
15	D940 to D949
16	D950 to D959
17	D960 to D969
18	D970 to D979
19	D980 to D989
20	D990 to D999
21	D1000 to D1009
22	D1010 to D1019
23	D1020 to D1029
24	D1030 to D1039
25	D1040 to D1049
26	D1050 to D1059
27	D1060 to D1069
28	D1070 to D1079
29	D1080 to D1089
30	D1090 to D1099
31	D1100 to D1109
32	D1100 to D1119

Signal name

	Signal name	Real	Virtual				Real mode axis	Refresh cycle	Fetch cycle	Signal direction
			Roller	Ball screw	Rotary table	Cam				
0	Feed current value	Backup	○				×	Operation cycle		Monitor device
1										
2	Minor error code							Immediately		
3	Major error code									
4	Execute program No.							At start		
5	M-code							Operation cycle		
6	Current value after virtual servo motor axis main shaft's differential gear									
7										
8	Error search output axis No.									
9	Data set pointer for constant-speed control									

○ : Valid, × : Invalid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(12) Synchronous encoder axis monitor device list

Axis No.	Device No.
1	D1120 to D1129
2	D1130 to D1139
3	D1140 to D1149
4	D1150 to D1159
5	D1160 to D1169
6	D1170 to D1179
7	D1180 to D1189
8	D1190 to D1199
9	D1200 to D1209
10	D1210 to D1219
11	D1220 to D1229
12	D1230 to D1239

Signal name

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0 1	Current value	Backup (Note-1)	○	Operation cycle		Monitor device
2	Minor error code	Backup		Immediately		
3	Major error code					
4 5	Unusable	—	—	—	—	—
6 7	Current value after synchronous encoder axis main shaft's differential gear	Backup	○	Operation cycle		Monitor device
8	Error search output axis No.					
9	Unusable	—	—	—	—	—

○ : Valid

(Note-1): It is valid for the version (Refer to Section 1.4) that supports "synchronous encoder current value monitor in real mode".

POINT

(1) It is unusable in the SV22 real mode.
(2) The range of axis No.1 to 8 is valid in the Q172DCPU(-S1).
(3) The device area of 9 axes or more can be used as a user device.
However, when the project of Q172DCPU(-S1) is replaced with Q173DSCPU/Q172DSCPU/Q173DCPU(-S1), this area cannot be used.

(13) Cam axis monitor device list

Axis No.	Device No.
1	D1240 to D1249
2	D1250 to D1259
3	D1260 to D1269
4	D1270 to D1279
5	D1280 to D1289
6	D1290 to D1299
7	D1300 to D1309
8	D1310 to D1319
9	D1320 to D1329
10	D1330 to D1339
11	D1340 to D1349
12	D1350 to D1359
13	D1360 to D1369
14	D1370 to D1379
15	D1380 to D1389
16	D1390 to D1399
17	D1400 to D1409
18	D1410 to D1419
19	D1420 to D1429
20	D1430 to D1439
21	D1440 to D1449
22	D1450 to D1459
23	D1460 to D1469
24	D1470 to D1479
25	D1480 to D1489
26	D1490 to D1499
27	D1500 to D1509
28	D1510 to D1519
29	D1520 to D1529
30	D1530 to D1539
31	D1540 to D1549
32	D1550 to D1559

Signal name

	Signal name	Real	Virtual	Refresh cycle	Fetch cycle	Signal direction
0	Unusable	—	—	—	—	—
1	Execute cam No.	Backup	○	Operation cycle		Monitor device
2	Execute stroke amount					
3						
4	Current value within 1 cam shaft revolution					
5						
6	Unusable	—	—	—	—	—
7						
8						
9						

○ : Valid

POINT

(1) The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(2) The unused axis areas in the mechanical system program can be used as a user device.

(14) Common device list

Device No.	Signal name		Refresh cycle	Fetch cycle	Signal direction
D704	PLC ready flag request			Main cycle	Command device
D705	Speed switching point specified flag request				
D706	All axes servo ON command request				
D707	Real mode/virtual mode switching request (SV22)				
D708	JOG operation simultaneous start command request				
D709	Unusable		—	—	—
D710	JOG operation simultaneous start axis setting register			At start	Command device
D711					
D712					
D713					
D714	Manual pulse generator axis 1 No. setting register			At the manual pulse generator enable flag OFF to ON	
D715					
D716	Manual pulse generator axis 2 No. setting register				
D717					
D718	Manual pulse generator axis 3 No. setting register				
D719					
D720	Axis 1	Manual pulse generators 1 pulse input magnification setting register (Note-1), (Note-2)			
D721	Axis 2				
D722	Axis 3				
D723	Axis 4				
D724	Axis 5				
D725	Axis 6				
D726	Axis 7				
D727	Axis 8				
D728	Axis 9				
D729	Axis 10				
D730	Axis 11				
D731	Axis 12				
D732	Axis 13				
D733	Axis 14				
D734	Axis 15				
D735	Axis 16				
D736	Axis 17				
D737	Axis 18				
D738	Axis 19				
D739	Axis 20				
D740	Axis 21				
D741	Axis 22				
D742	Axis 23				
D743	Axis 24				
D744	Axis 25				
D745	Axis 26				
D746	Axis 27				
D747	Axis 28				
D748	Axis 29				
D749	Axis 30				
D750	Axis 31				
D751	Axis 32				

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
D752	Manual pulse generator 1 smoothing magnification setting register		At the manual pulse generator enable flag OFF to ON	Command device
D753	Manual pulse generator 2 smoothing magnification setting register			
D754	Manual pulse generator 3 smoothing magnification setting register			
D755	Manual pulse generator 1 enable flag request		Main cycle	
D756	Manual pulse generator 2 enable flag request			
D757	Manual pulse generator 3 enable flag request			
D758	Unusable (42 points)	—	—	—
D759				
D760				
D761				
D762				
D763				
D764				
D765				
D766				
D767				
D768				
D769				
D770				
D771				
D772				
D773				
D774				
D775				
D776				
D777				
D778				
D779				
D780				
D781				
D782				
D783				
D784				
D785				
D786				
D787				
D788				
D789				
D790				
D791				
D792				
D793				
D794				
D795				
D796				
D797				
D798				
D799				

(Note-1): The following range is valid.
- Q172DSCPU : Axis No.1 to 16
- Q172DCPU(-S1) : Axis No.1 to 8

(Note-2): The following device area is unusable.
- Q172DSCPU : 17 axes or more
- Q172DCPU(-S1) : 9 axes or more

(15) Motion register list (#)

Axis No.	Device No.	Signal name
1	#8000 to #8019	
2	#8020 to #8039	
3	#8040 to #8059	
4	#8060 to #8079	
5	#8080 to #8099	
6	#8100 to #8119	
7	#8120 to #8139	
8	#8140 to #8159	
9	#8160 to #8179	
10	#8180 to #8199	
11	#8200 to #8219	
12	#8220 to #8239	
13	#8240 to #8259	
14	#8260 to #8279	
15	#8280 to #8299	
16	#8300 to #8319	
17	#8320 to #8339	
18	#8340 to #8359	
19	#8360 to #8379	
20	#8380 to #8399	
21	#8400 to #8419	
22	#8420 to #8439	
23	#8440 to #8459	
24	#8460 to #8479	
25	#8480 to #8499	
26	#8500 to #8519	
27	#8520 to #8539	
28	#8540 to #8559	
29	#8560 to #8579	
30	#8580 to #8599	
31	#8600 to #8619	
32	#8620 to #8639	

	Signal name	Refresh cycle	Signal direction
0	Servo amplifier type	When the servo amplifier power-on	Monitor device
1	Motor current value	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	
2	Motor speed		
3			
4	Command speed	Operation cycle	
5			
6	Home position return re-travel value	At home position return re-travel	
7			
8	Servo amplifier display servo error code	Main cycle	
9	Parameter error No. QDS		
10	Servo status1 QDS	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	
11	Servo status2 QDS		
12	Servo status3 QDS		
13	Unusable	—	—
14	Servo status5 QDS Ver.!	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	Monitor device
15	Unusable	—	—
16			
17			
18	Servo status7 QDS Ver.!	Operation cycle 1.7[ms] or less : Operation cycle Operation cycle 3.5[ms] or more : 3.5[ms]	Monitor device
19	Unusable	—	—

(16) Product information list devices (#8736 to #8751) Ver.!

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
#8736 to #8743	Operating system software version	At power supply ON		Monitor device
#8744 to #8751	Motion CPU module serial number			

Ver.! : Refer to Section 1.4 for the software version that supports this function.

(17) Special relay list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal type
SM500	PCPU READY complete flag	Main cycle		Status signal
SM501	TEST mode ON flag			
SM502	External forced stop input flag	Operation cycle		
SM503	Digital oscilloscope executing flag	Main cycle		
SM506	External forced stop input ON latch flag Ver.!	Operation cycle		
SM508	Amplifier-less operation status flag	Main cycle		
SM510	TEST mode request error flag			
SM512	Motion CPU WDT error flag			
SM513	Manual pulse generator axis setting error flag			
SM516	Servo program setting error flag			

(18) Special register list

Device No.	Signal name	Refresh cycle	Fetch cycle	Signal direction
SD200	State of switch	Main cycle		Monitor device
SD500	Real mode axis information register (SV22)			
SD501				
SD502	Servo amplifier loading information	At power supply on/ operation cycle		
SD503				
SD504	Real mode/virtual mode switching error information (SV22)	At virtual mode transition		
SD505				
SD506				
SD508	SSCNET control (status)	Main cycle		
SD510	Test mode request error information	At test mode request		
SD511				
SD512	Motion CPU WDT error cause	At Motion CPU WDT error occurrence		
SD513	Manual pulse generator axis setting error information	At the manual pulse generator enable flag OFF to ON		
SD514				
SD515				
SD516	Error program No.	At start		
SD517	Error item information			
SD522	Motion operation cycle	Operation cycle		
SD523	Operation cycle of the Motion CPU setting	At power supply on		
SD524	Maximum Motion operation cycle QDS	Operation cycle		
SD550	System setting error information QDS	At System setting error occurrence		
SD551				
SD560	Operation method QDS Ver.!	At power supply on		
SD803	SSCNET control (command)		Main cycle	Command device

Ver.! : Refer to Section 1.4 for the software version that supports this function.

WARRANTY

Please confirm the following product warranty details before using this product.

1. Gratis Warranty Term and Gratis Warranty Range

We will repair any failure or defect hereinafter referred to as "failure" in our FA equipment hereinafter referred to as the "Product" arisen during warranty period at no charge due to causes for which we are responsible through the distributor from which you purchased the Product or our service provider. However, we will charge the actual cost of dispatching our engineer for an on-site repair work on request by customer in Japan or overseas countries. We are not responsible for any on-site readjustment and/or trial run that may be required after a defective unit is repaired or replaced.

[Gratis Warranty Term]

The term of warranty for Product is thirty six (36) months after your purchase or delivery of the Product to a place designated by you or forty two (42) months from the date of manufacture whichever comes first "Warranty Period". Warranty period for repaired Product cannot exceed beyond the original warranty period before any repair work.

[Gratis Warranty Range]

(1) You are requested to conduct an initial failure diagnosis by yourself, as a general rule.
It can also be carried out by us or our service company upon your request and the actual cost will be charged. However, it will not be charged if we are responsible for the cause of the failure.

(2) This limited warranty applies only when the condition, method, environment, etc. of use are in compliance with the terms and conditions and instructions that are set forth in the instruction manual and user manual for the Product and the caution label affixed to the Product.

(3) Even during the term of warranty, the repair cost will be charged on you in the following cases;

1) A failure caused by your improper storing or handling, carelessness or negligence, etc., and a failure caused by your hardware or software problem
2) A failure caused by any alteration, etc. to the Product made on your side without our approval
3) A failure which may be regarded as avoidable, if your equipment in which the Product is incorporated is equipped with a safety device required by applicable laws and has any function or structure considered to be indispensable according to a common sense in the industry
4) A failure which may be regarded as avoidable if consumable parts designated in the instruction manual, etc. are duly maintained and replaced
5) Any replacement of consumable parts (battery, fan, etc.)
6) A failure caused by external factors such as inevitable accidents, including without limitation fire and abnormal fluctuation of voltage, and acts of God, including without limitation earthquake, lightning and natural disasters
7) A failure generated by an unforeseeable cause with a scientific technology that was not available at the time of the shipment of the Product from our company
8) Any other failures which we are not responsible for or which you acknowledge we are not responsible for

2. Onerous Repair Term after Discontinuation of Production

(1) We may accept the repair at charge for another seven (7) years after the production of the product is discontinued.
The announcement of the stop of production for each model can be seen in our Sales and Service, etc.

(2) Please note that the Product (including its spare parts) cannot be ordered after its stop of production.

3. Service in overseas countries

Our regional FA Center in overseas countries will accept the repair work of the Product; However, the terms and conditions of the repair work may differ depending on each FA Center. Please ask your local FA center for details.

4. Exclusion of Loss in Opportunity and Secondary Loss from Warranty Liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:

(1) Damages caused by any cause found not to be the responsibility of Mitsubishi.
(2) Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.
(3) Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.
(4) Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

5. Change of Product specifications

Specifications listed in our catalogs, manuals or technical documents may be changed without notice.

6. Precautions for Choosing the Products

(1) For the use of our Motion controller, its applications should be those that may not result in a serious damage even if any failure or malfunction occurs in Motion controller, and a backup or fail-safe function should operate on an external system to Motion controller when any failure or malfunction occurs.

(2) Our Motion controller is designed and manufactured as a general purpose product for use at general industries. Therefore, applications substantially influential on the public interest for such as atomic power plants and other power plants of electric power companies, and also which require a special quality assurance system, including applications for railway companies and government or public offices are not recommended, and we assume no responsibility for any failure caused by these applications when used.
In addition, applications which may be substantially influential to human lives or properties for such as airlines, medical treatments, railway service, incineration and fuel systems, man-operated material handling equipment, entertainment machines, safety machines, etc. are not recommended, and we assume no responsibility for any failure caused by these applications when used.
We will review the acceptability of the abovementioned applications, if you agree not to require a specific quality for a specific application. Please contact us for consultation.

(3) Mitsubishi shall have no responsibility or liability for any problems involving programmable controller trouble and system trouble caused by DoS attacks, unauthorized access, computer viruses, and other cyberattacks.

Microsoft, Windows, Windows NT, Windows Vista, and Windows XP are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
The company names, system names and product names mentioned in this manual are either registered trademarks or trademarks of their respective companies.
In some cases, trademark symbols such as '™' or '®' are not specified in this manual.

IB(NA)-0300137-L(2204)MEE
MODEL: Q173D-P-SV22-KASO-E
MODEL CODE: 1XB931

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE : TOKYO BUILDING, 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
NAGOYA WORKS : 1-14 , YADA-MINAMI 5-CHOME , HIGASHI-KU, NAGOYA , JAPAN

When exported from Japan, this manual does not require application to the Ministry of Economy, Trade and Industry for service transaction permission.

Specifications subject to change without notice.